



**CBased Environmental  
Pty Limited**

ABN 62 611 924 264



**Calga Quarry**

**Environmental Monitoring**

**Dust Deposition Gauges, Surface and Ground  
Waters and Meteorological Station**

**January 2017**

---

Colin Davies BSc MEIA CEnvP  
Environmental Scientist  
Date: 27 February 2017

## Executive Summary

CBased Environmental is contracted by Hanson Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- Dust Deposition Gauges;
- Surface Waters;
- Groundwaters; and
- Meteorological Station.

This report was prepared by CBased Environmental and includes the following;

- Dust Deposition results for January 2017;
- Surface Water quality results for January 2017;
- Ground Water quality results for January 2017 and
- Meteorological report for January 2017.

The January 2017 dust deposition results for insoluble solids were generally low and free of major contamination. All sites, on a rolling annual average basis, are currently below the Air Quality Management Plan exceedance level of 3.7g/m<sup>2</sup>.month. Results were found to be representative of dust levels as determined by the Australian Standard.

Surface water samples were collected at sites A, C1, C2 and F. Site B and D were dry or not flowing and unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any sites in January 2017.

Bi-monthly groundwaters were sampled on 2 February 2017. Groundwater depth generally increased compared to November 2016, indicating water moving away from the surface. pH at all sites is in the acidic to neutral range and have generally remained similar when compared to the previous results. EC levels have slightly increased at a majority of groundwater sites when compared to the November 2016 results.

Data for January 2017 shows that rainfall recorded at the Calga Quarry was lower than the Gosford BOM mean rainfall and the Peats Ridge long term rainfall for January.

The rainfall comparison is provided below:

Calga Quarry	20.6 mm
BOM Peats Ridge*	NA
BOM Gosford*	35.6 mm
BOM Peats Ridge Long term mean for January*	113.3 mm

\*Data sourced from Bureau of Meteorology (BOM) website ([www.bom.gov.au](http://www.bom.gov.au)).

**Note:** Differences in the daily rainfall readings between BOM and the Calga station may occur due to BOM stations reporting rainfall at 9am and the Calga station recording rainfall at midnight.

## Sampling Program

Hanson Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. CBased Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. CBased Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 “*Methods for sampling and analysis of ambient air method. Determination of particulates- deposited matter- gravimetric Method*”. Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m<sup>2</sup>.month.

Surface waters are sampled in accordance with Australian Standards AS5667.1 “*Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples*”, AS5667.6 “*Water quality sampling—guidance on sampling of rivers and streams*” and AS5667.4 “*Water quality sampling—guidance on sampling from lakes, natural and man-made*”. Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards AS5667.1 “*Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples*” and AS5667.11 “*Water quality sampling—guidance on sampling of ground waters*”. Groundwater monitoring sites are sampled bi-monthly for depth and water quality. Groundwater monitoring loggers continuously record water levels in a selection of bores.


Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real-time display. Metrological parameters are measured according to Australian Standard AS3580.14 “*Methods for sampling and analysis of ambient air. Meteorological monitoring for ambient air quality monitoring applications*”

The weather stations have the following sensor configuration;

- Air temperature
- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

CBased Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

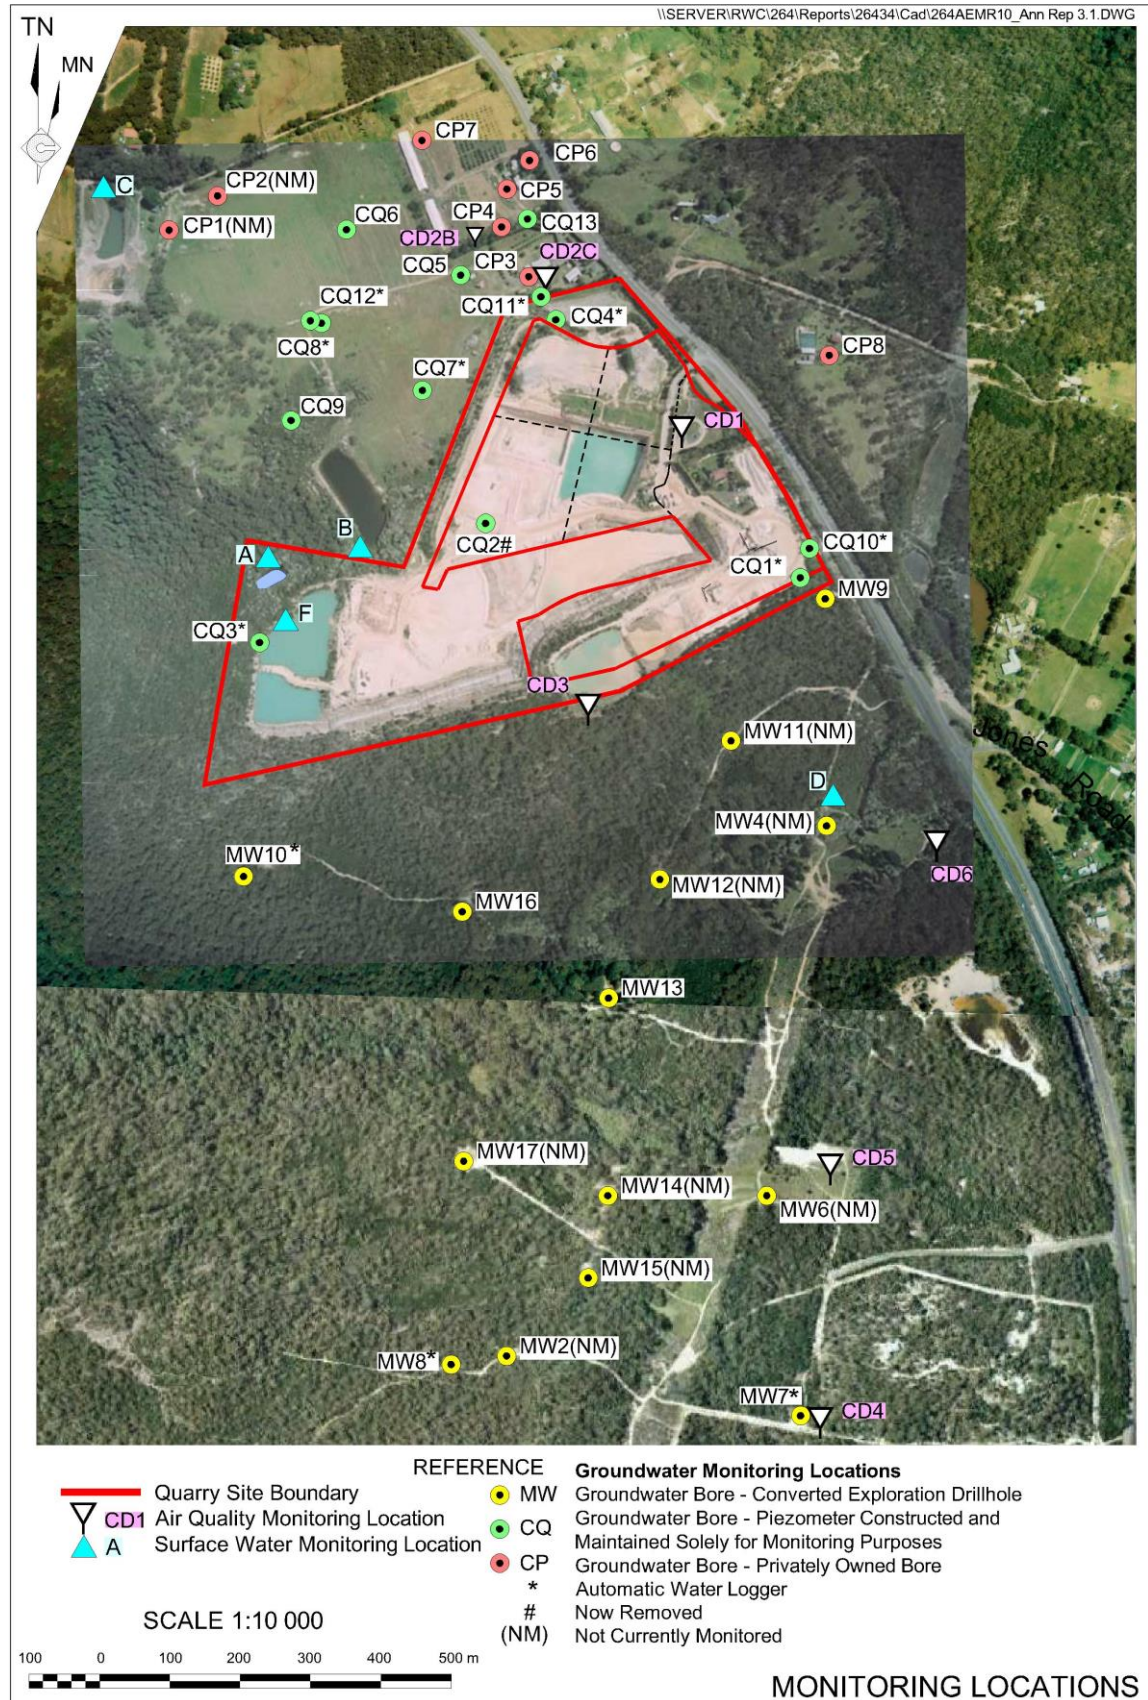

**Figure 1:** Hanson Calga Quarry environmental monitoring locations

## 2.0 Monthly Results

### 2.1 Dust Deposition Gauges

**Table 1** displays the results for January 2017 and the project 12-month rolling average. Results are in g/m<sup>2</sup>.month.

**Table 1: Dust Deposition results: 3 January 2017 – 2 February 2017 (30 days)**

Site	Monthly Insoluble Solids (g/m <sup>2</sup> .month)	Monthly Ash Residue (g/m <sup>2</sup> .month)	Monthly Combustible Matter (g/m <sup>2</sup> .month)	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids (g/m <sup>2</sup> .month)
<b>CD1</b>	11.9	11.1	0.8	93	2.3
<b>CD2c</b>	0.7	0.5	0.2	71	0.9
<b>CD3</b>	1.4	0.9	0.5	64	1.2
<b>CD4</b>	0.9	0.3	0.6	33	0.6
<b>CD5</b>	0.9	0.6	0.3	67	0.5
<b>CD6</b>	0.7	0.3	0.4	43	0.9


Insoluble Solids marked with an \* indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m<sup>2</sup>.month; the Development Consent's annual average amenity criteria at residential locations. The current rolling annual average is calculated from February 2016 to January 2017.

NA= Not Available.

CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The laboratory analysis is provided in **Appendix 1**.

Figure 2: Dust Deposition Charts

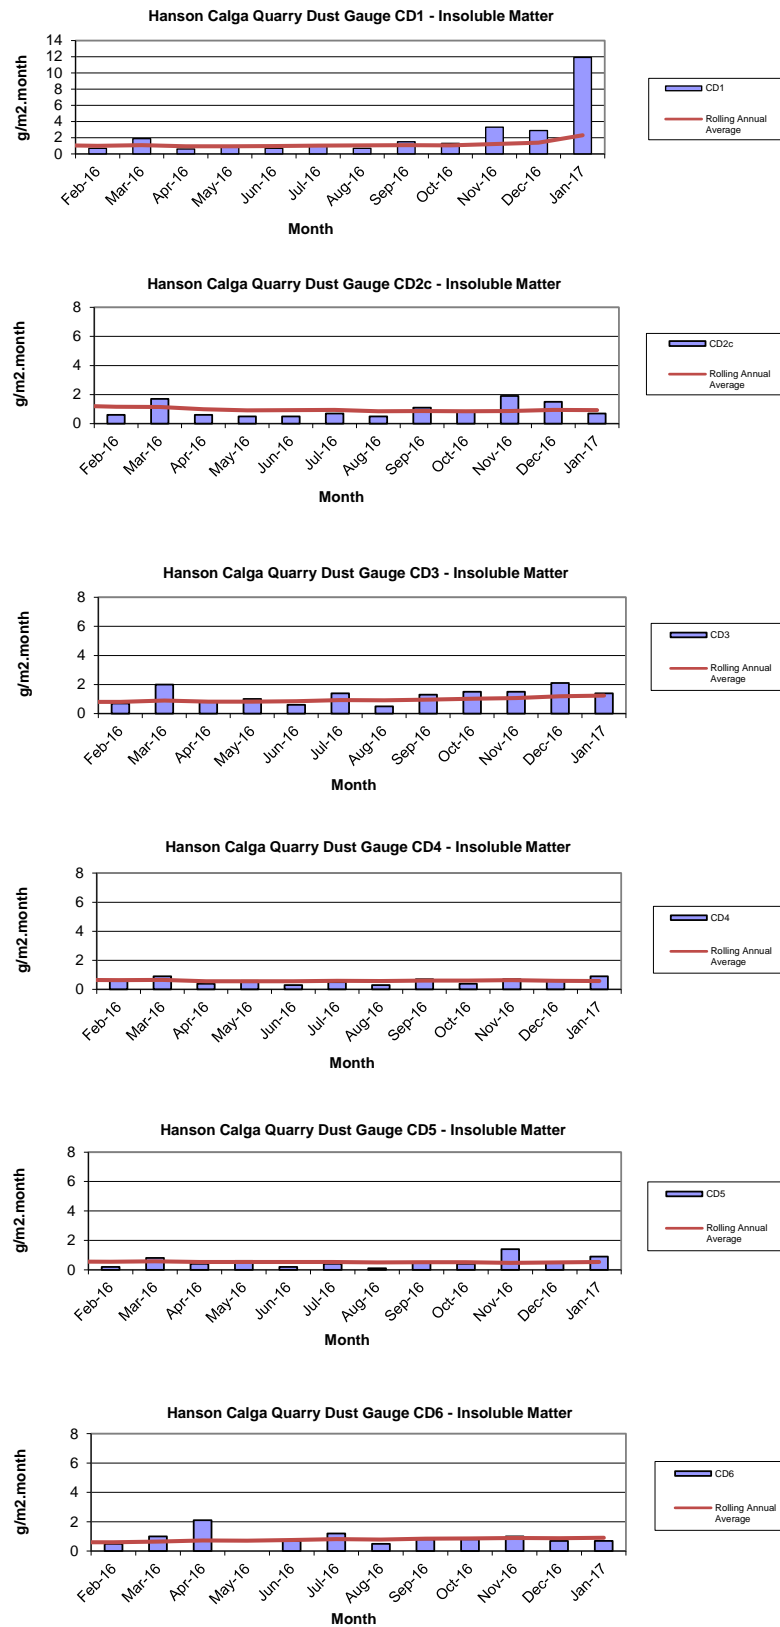



## 2.2 Surface Water Monitoring

Monthly surface water monitoring was conducted on the 2 February 2017 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

**Table 2: Monthly surface water monitoring – January grab sample results**

Site	Observed Flow Rate	Water Colour	Turbidity	pH	EC ( $\mu\text{S/cm}$ )	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
A	Still	Brown	Slight	6.42	94	72	<5	<5
B	No flow							
C1	Dam	Clear	Clear	6.84	106	68	9	<5
C2	Trickle	Clear	Clear	6.53	106	68	<5	<5
D	Dry							
F	Still	Clear	Clear	6.05	107	76	16	<5

Samples were collected at sites A, C1, C2 and F. Site B and D were dry or not flowing and unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any sites in January 2017.

### 2.2.1 Non-Routine Surface Water Sampling

No non-routine sampling was undertaken during January 2017.

## 2.3 Groundwater Monitoring

Bi-monthly groundwaters were sampled on 2 February 2017. Water quality tests for pH and electrical conductivity were conducted by CBased Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH ( $\pm 0.1$  pH units) and Electrical Conductivity ( $\pm 5\%$ ) was obtained between samples. Data is displayed in **Table 3** and **Figures 3 to 6**.

Groundwater depth generally increased compared to November 2016, indicating water moving away from the surface. pH at all sites is in the acidic to neutral range and generally remained slightly varied when compared to the previous results. EC levels were similar or slightly increased at a majority of groundwater sites when compared to the November 2016 results.

**Table 3: Groundwater Quality Data**

Reference	Bore	Type	Depth to water TOC (m) April 06	Depth to water TOC (m) This report	pH This report	Electrical Conductivity (µS/cm) This report
<b>CQ1</b>	Voutos	* Monitor	20.59	Removed		
<b>CQ3</b>	Voutos	* Monitor	10.53	10.97	6.4	152
<b>CQ4</b>	Voutos	* Monitor	8.78	10.94	5.1	110
<b>CQ5</b>	Gazzana	DIP Only	8.69	8.11	4.3	167
<b>CQ6</b>	Gazzana	DIP Only	16.00	Removed		
<b>CQ7</b>	Gazzana	* Monitor	6.89	7.07	4.4	103
<b>CQ8</b>	Gazzana	* Monitor	11.03	7.18	4.3	125
<b>CQ9</b>	Gazzana	DIP Only	10.10	Unable to sample - pipe bent		
<b>CQ10</b>	Voutos	* Monitor	NI	25.44	4.7	130
<b>CQ11S</b>	Gazzana	* Monitor	NI	11.19	5.1	135
<b>CQ11D</b>	Gazzana	* Monitor	NI	12.44	4.7	143
<b>CQ12</b>	Gazzana	* Monitor	NI	5.45	4.3	121
<b>CQ13</b>	Kashouli	* Monitor	NI	14.73	4.3	178
<b>CP3</b>	Gazzana	Domestic	10.40	Destroyed		
<b>CP4</b>	Kashouli	Domestic	13.63	11.75	NM	
<b>CP5</b>	Kashouli	Domestic	16.61	9.77	4.3	182
<b>CP6</b>	Kashouli	Domestic	16.27	11.83	4.3	166
<b>CP7</b>	Kashouli	Production	8.56	5.29	4.7	104
<b>CP8</b>	Rozmanec	Domestic	22.17	21.93	4.3	122
<b>MW7</b>	Rocla Bore	* Monitor	15.76	16.67	4.5	103
<b>MW8</b>	Rocla Bore	* Monitor	9.82	8.05	4.8	78
<b>MW9</b>	Rocla Bore	* Monitor	22.44	23.60	4.6	81
<b>MW10</b>	Rocla Bore	* Monitor	15.41	No Access - track eroded		
<b>MW13</b>	Rocla Bore	DIP Only	NI	No Access - track eroded		
<b>MW16</b>	Rocla Bore	DIP Only	NI	No Access - tree across track		
<b>MW17</b>	Rocla Bore	DIP Only		No Access - tree across track		

Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to non-operational pump.

NR = Not Required by resident.

\* = Logger Installed.

NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.



Shading is used to indicate the following trends in water depth (compared to the last reading):

	Increase to ground water depth (water moved away from surface)
	Decrease to ground water depth (water moved towards surface)
	Stable water depth (+/- 0.01m)


Available groundwater loggers were downloaded and will be forwarded to the Hanson Calga Quarry groundwater consultant.




Figures 3 to 6: Groundwater Depth Charts.

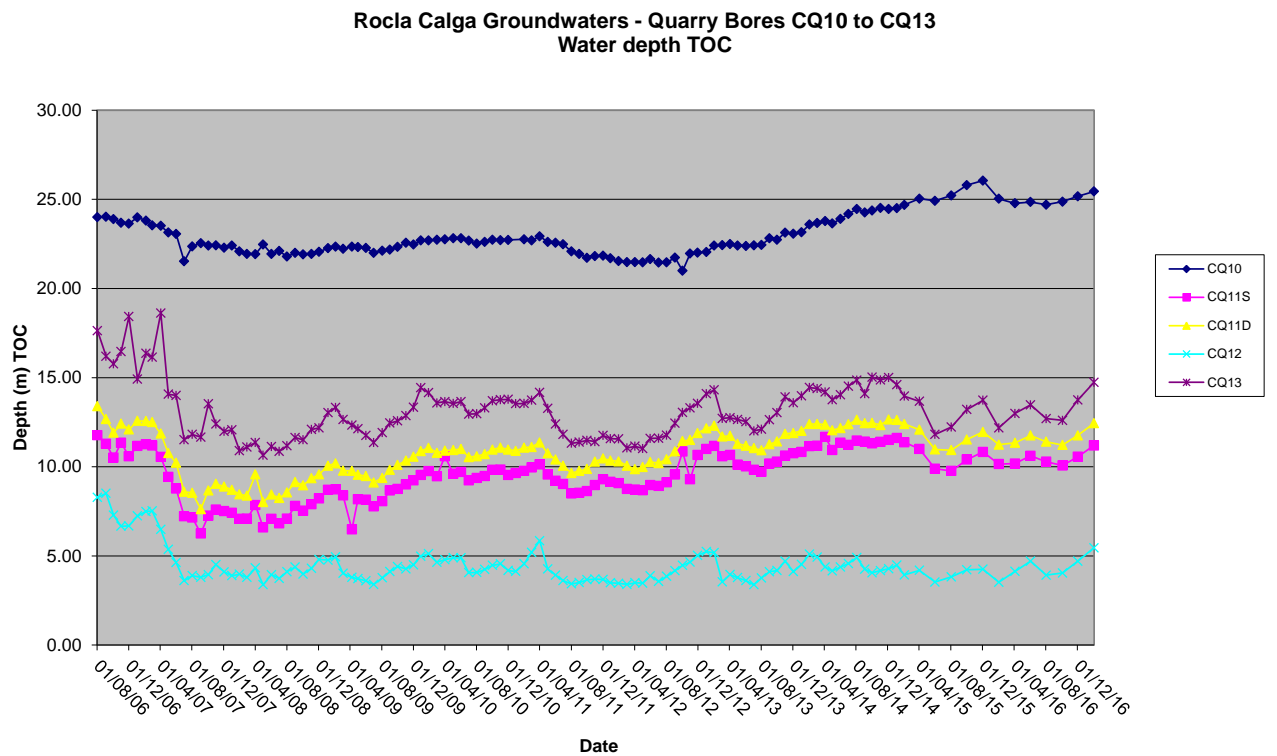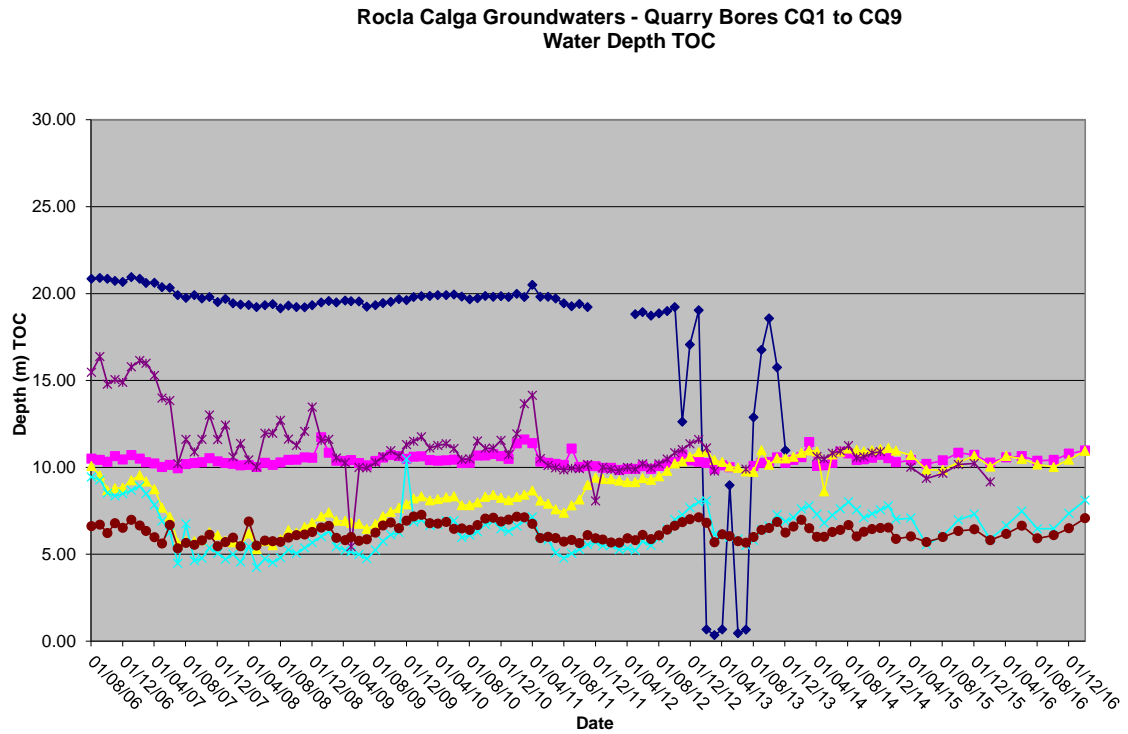

Rocla Calga Groundwaters - Quarry Bores CP3 to CP8  
Water Depth TOC

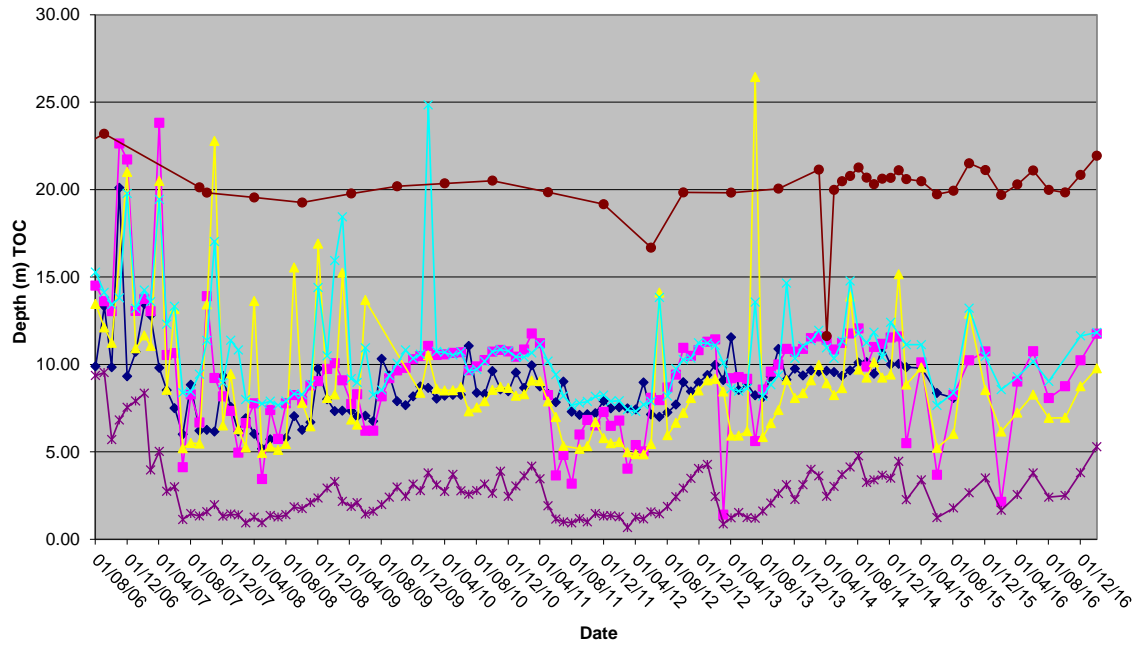

Rocla Calga Groundwaters - Quarry Bores MW7 to MW17  
Water Depth TOC

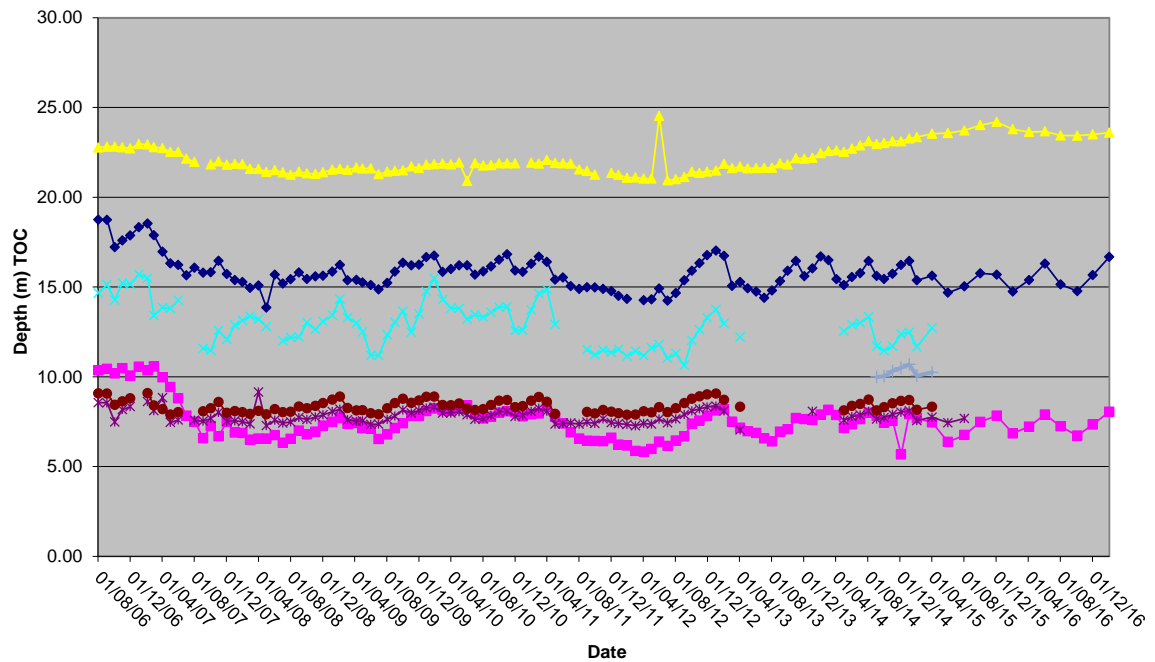

## 2.4 Meteorological Monitoring

The Calga Quarry weather station data recovery in January 2017 was approximately 100%.

The weather station data follows and includes;

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

Monthly weather statistics from the nearby Bureau of Meteorology (BOM) at Peats Ridge station are no longer available. However, the long-term rainfall mean is available via a link on the Gosford BOM Daily Weather Observation page.

Data for January 2017 shows that rainfall recorded at the Calga Quarry was lower than the Gosford BOM mean rainfall and the Peats Ridge long term rainfall for January.

The rainfall comparison is provided below:

Calga Quarry	20.6 mm
BOM Peats Ridge*	NA
BOM Gosford*	35.6 mm
BOM Peats Ridge Long term mean for January*	113.3 mm

NA = Not Available




\*Data sourced from Bureau of Meteorology (BOM) website ([www.bom.gov.au](http://www.bom.gov.au)).



## 2.4.1 Monthly Meteorological Data Summary

Summary Jan-17 Hanson - Calga

Date	Min Temp	Av Temp	Max Temp	Min %RH	Av %RH	Max %RH	RAIN mm	Min WS	Av WS	Max WS	Min wind chill	Max Heat index	Min Atm P	Av Atm P	Max Atm P	Min Data %	Av data %	Max Data %
1/01/2017	21.2	22.4	24.3	82.0	89.6	95.0	0.0	0.0	0.1	4.9	21.2	26.2	1001.6	1003.1	1004.5	100	100.0	100.0
2/01/2017	18.1	20.7	23.7	69.0	87.1	96.0	0.2	0.0	0.9	8.9	18.1	25.3	1002.0	1007.3	1013.5	93.5	99.9	100.0
3/01/2017	17.4	19.8	23.7	65.0	84.4	95.0	0.4	0.0	0.9	8.0	17.4	24.9	1012.9	1015.1	1017.2	94.8	99.9	100.0
4/01/2017	17.2	20.7	24.9	51.0	76.9	94.0	6.6	0.0	1.4	8.9	17.3	25.3	1015.9	1016.9	1018.3	96.0	99.9	100.0
5/01/2017	17.9	21.0	25.3	66.0	85.4	96.0	2.6	0.0	1.5	9.4	17.9	26.3	1012.3	1014.3	1016.1	83.1	99.1	100.0
6/01/2017	18.7	21.7	26.3	55.0	82.9	97.0	0.6	0.0	1.3	8.9	18.7	27.7	1012.3	1014.3	1016.4	97.5	100.0	100.0
7/01/2017	16.4	21.4	27.2	57.0	78.8	96.0	0.0	0.0	1.9	9.8	16.4	28.7	1010.2	1013.1	1016.0	100.0	100.0	100.0
8/01/2017	16.3	24.1	33.6	34.0	67.7	94.0	0.0	0.0	1.2	8.9	16.4	35.8	1005.2	1008.3	1011.5	86.5	99.9	100.0
9/01/2017	19.8	26.6	35.8	24.0	61.4	86.0	0.0	0.0	1.2	7.2	19.8	37.6	1004.5	1006.6	1009.8	98.5	100.0	100.0
10/01/2017	21.9	26.6	36.9	33.0	68.6	89.0	0.0	0.0	0.7	6.3	21.9	40.7	1003.9	1007.0	1009.7	94.8	99.8	100.0
11/01/2017	23.6	29.9	39.8	23.0	54.9	85.0	0.0	0.0	1.6	15.2	23.6	40.7	998.8	1003.2	1005.8	92.6	99.6	100.0
12/01/2017	21.2	24.2	29.2	52.0	74.1	89.0	0.0	0.0	1.5	8.5	21.2	31.2	1005.7	1007.7	1009.9	86.5	99.8	100.0
13/01/2017	21.1	30.6	43.2	19.0	55.8	88.0	0.0	0.0	1.4	13.4	21.1	45.3	994.3	1001.7	1009.8	80.6	99.4	100.0
14/01/2017	22.9	29.6	35.8	39.0	57.7	86.0	0.0	0.0	1.0	8.9	22.9	40.6	996.7	1000.1	1007.5	92.6	99.8	100.0
15/01/2017	20.2	22.7	27.5	57.0	78.0	92.0	1.8	0.0	1.4	7.6	20.2	28.6	1007.5	1011.1	1013.7	100.0	100.0	100.0
16/01/2017	19.2	23.8	30.3	52.0	74.0	91.0	0.0	0.0	1.9	9.4	19.2	32.8	1009.6	1012.2	1014.3	94.8	99.9	100.0
17/01/2017	17.9	28.4	39.4	27.0	61.8	96.0	0.2	0.0	1.4	9.8	18.0	43.7	1003.1	1007.5	1011.4	94.2	99.7	100.0
18/01/2017	18.8	29.5	40.2	23.0	54.0	94.0	0.2	0.0	2.6	14.3	18.8	42.3	1000.6	1004.1	1012.2	95.4	99.9	100.0
19/01/2017	17.4	18.9	20.3	77.0	86.5	94.0	0.4	0.0	0.9	7.6	17.4	21.5	1007.1	1010.5	1012.4	99.4	100.0	100.0
20/01/2017	19.3	23.3	29.4	66.0	81.3	94.0	0.0	0.0	1.3	11.6	19.3	34.1	990.1	997.2	1007.0	100.0	100.0	100.0
21/01/2017	19.2	21.3	24.9	53.0	67.9	85.0	0.0	0.0	0.9	8.0	19.2	25.4	999.3	1007.5	1013.8	99.7	100.0	100.0
22/01/2017	18.7	22.2	28.2	52.0	71.2	86.0	0.0	0.0	1.6	10.3	18.7	29.1	1010.6	1012.9	1014.9	88.9	99.9	100.0
23/01/2017	17.6	26.0	35.2	41.0	66.7	95.0	0.0	0.0	1.6	11.2	17.6	38.9	1004.3	1008.5	1012.2	71.7	94.5	100.0
24/01/2017	18.6	28.8	37.4	36.0	56.9	95.0	0.0	0.0	2.1	15.2	18.6	41.6	1003.1	1006.3	1015.8	19.4	87.6	100.0
25/01/2017	17.7	19.3	21.6	81.0	91.5	96.0	0.0	0.0	0.1	6.3	17.8	22.5	1012.9	1015.5	1018.0	43.7	93.7	100.0
26/01/2017	19.2	20.7	24.2	81.0	89.4	96.0	0.2	0.0	0.2	4.5	19.2	25.9	1010.8	1012.3	1014.6	98.5	99.9	100.0
27/01/2017	18.8	21.4	25.6	73.0	87.2	96.0	0.8	0.0	0.7	6.3	18.9	27.1	1012.7	1014.0	1015.4	72.3	94.8	100.0
28/01/2017	17.6	25.4	35.6	34.0	73.3	97.0	0.8	0.0	1.0	8.5	17.7	41.1	1007.5	1010.9	1014.2	92.3	99.6	100.0
29/01/2017	21.3	24.7	31.2	60.0	80.9	94.0	2.2	0.0	0.4	6.3	21.3	35.3	1009.2	1011.5	1013.8	100.0	100.0	100.0
30/01/2017	20.8	29.4	40.7	23.0	64.9	96.0	3.2	0.0	1.2	8.9	20.8	43.5	1003.1	1007.1	1011.6	67.7	88.7	100.0
31/01/2017	21.3	29.7	41.3	22.0	56.4	92.0	0.4	0.0	1.8	13.4	21.3	42.4	1003.1	1006.0	1012.2	44.9	78.8	100.0
Monthly	16.3	24.3	43.2	19	73	97	20.6	0	1.2	15.2	16.4	45.3	990.1	1008.8	1018.3	19.4	97.9	100


## 2.4.2 Monthly Weather Charts

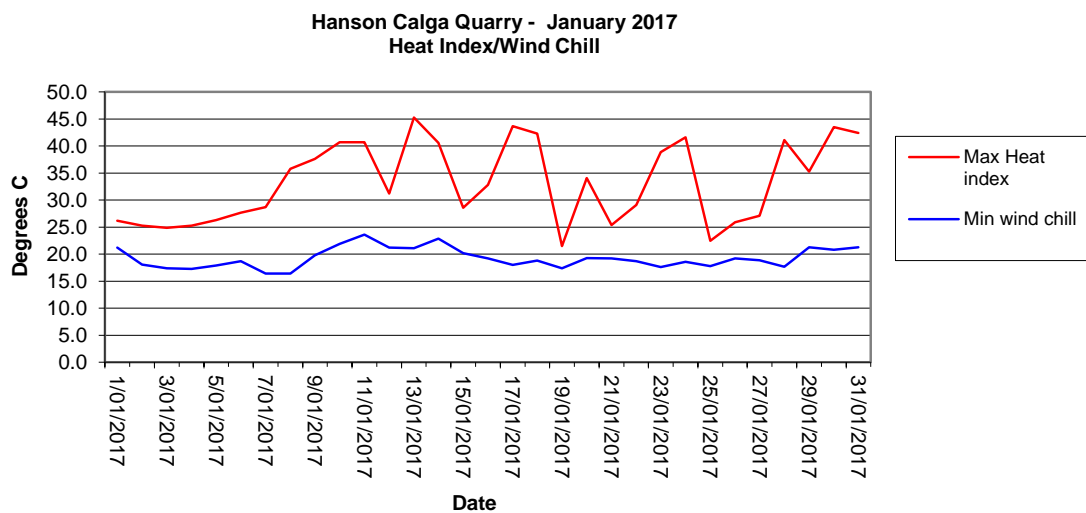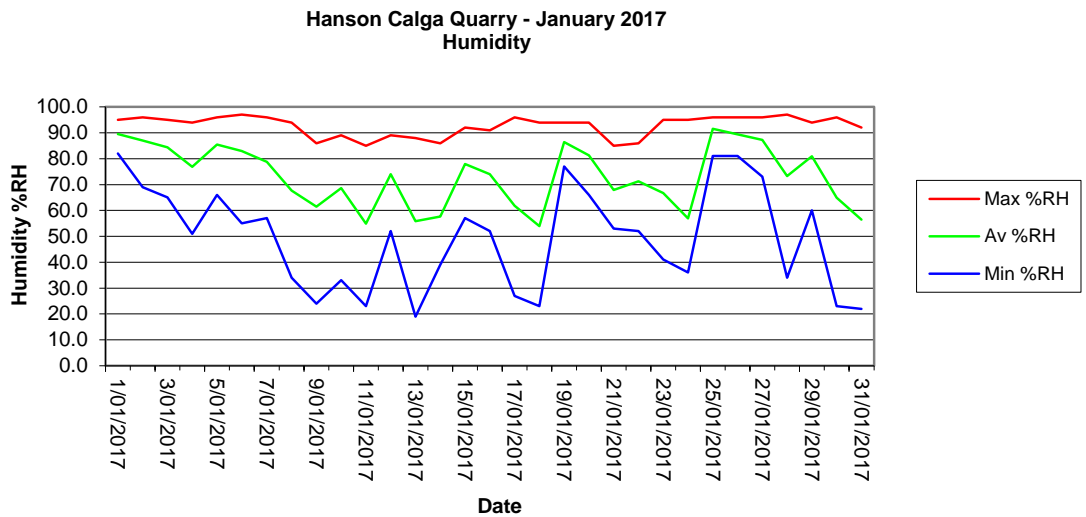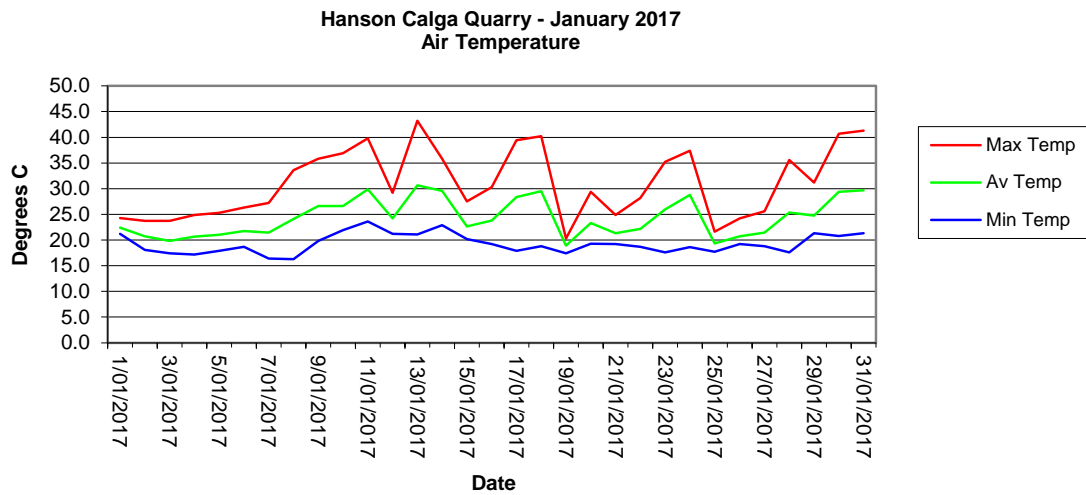

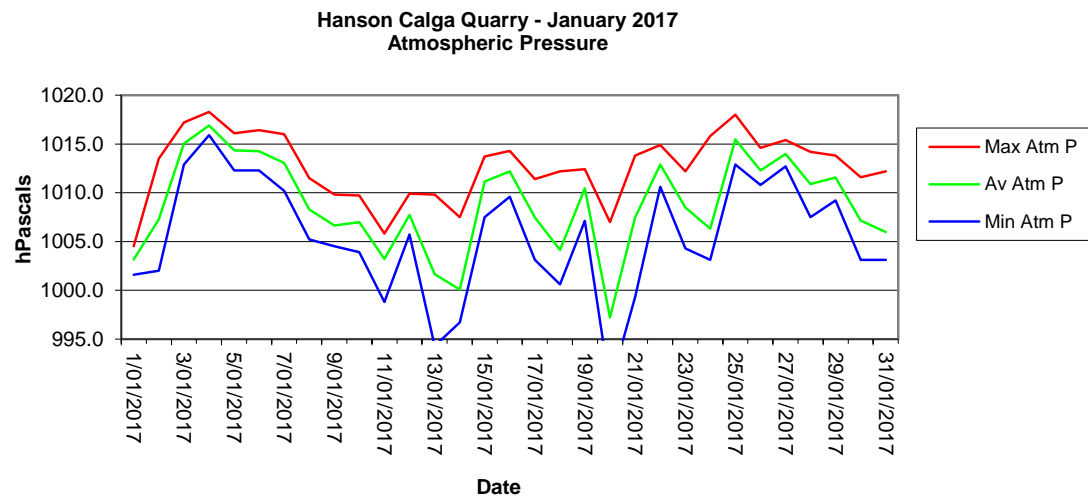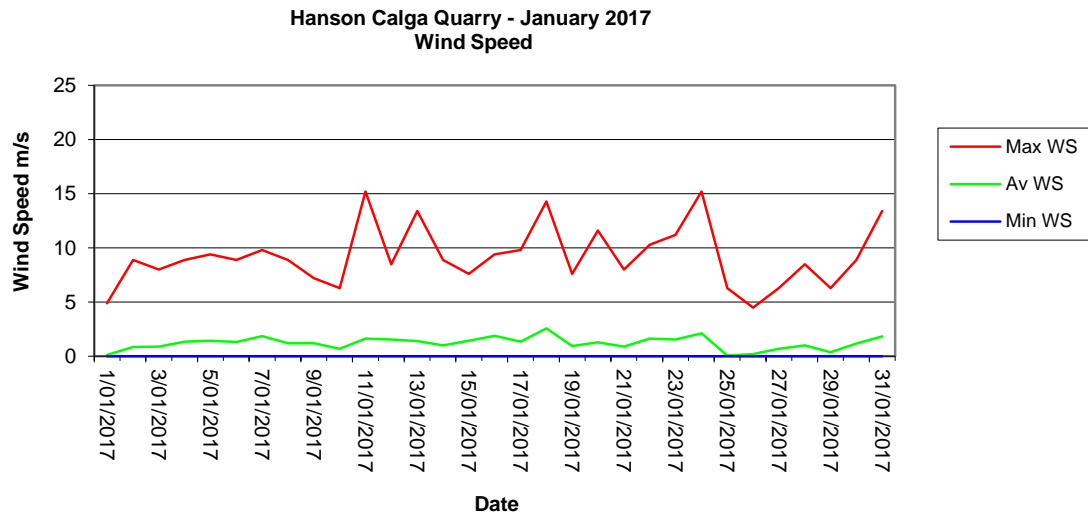




Hanson Calga Quarry - January 2017  
Rainfall

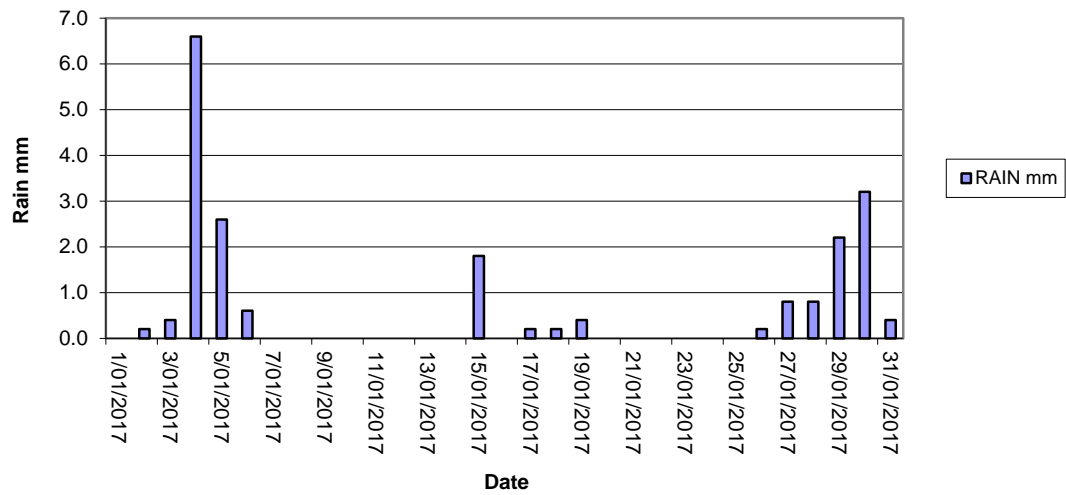


Hanson Calga Quarry - January 2017  
Data Reception

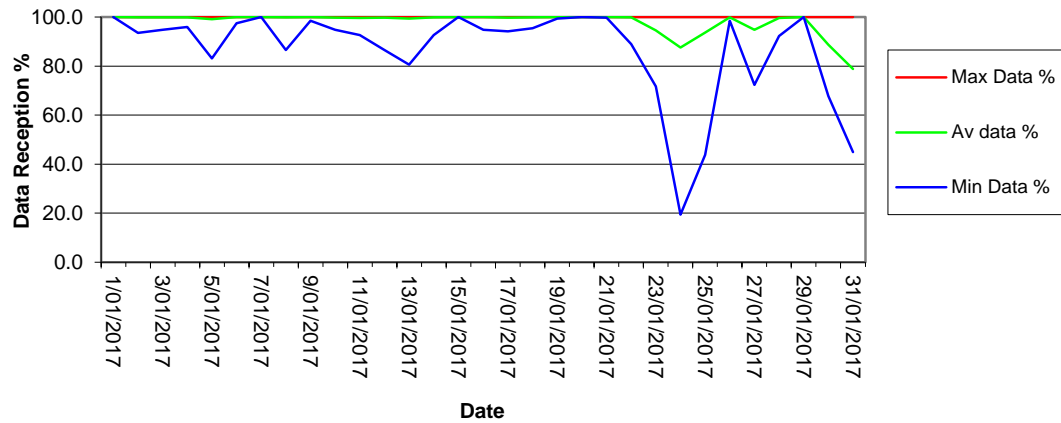

### 2.4.3 Monthly Windrose Plot

Frequency plot of the average wind speed and average direction over each 15-minute sampling period. Wind is considered to be calm when at less than a 15-minute average of 1m/s.

00:15, 1 January 2017 – 23:45, 31 January 2017

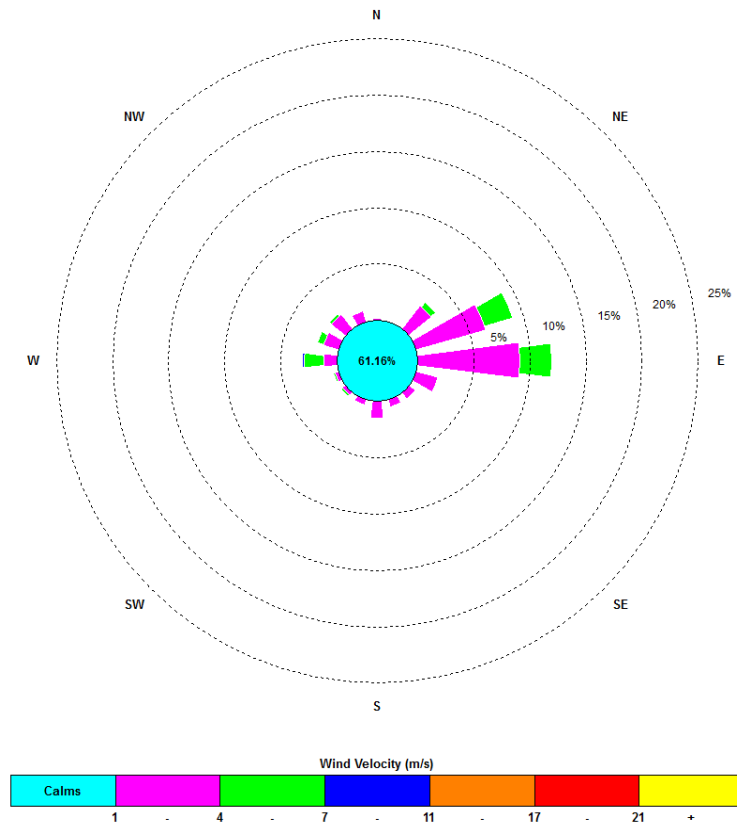

The predominant winds were from the E, with most frequent, strongest winds also from the E. The maximum wind speed was 15.2 m/s from the W and WSW.

## **Appendix 1**

Field Sheets

Chain of Custody

Laboratory Certificates



Sampled By: House 3 120  
Sampling ID: .....

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE)

Colour: C=Clear, O=Orange, Bn=Brown, Gn=Green, Gy = Grey (CIRCLE)


### Report broken funnels and replacement diameters

Signed:



[illegible]

Environmental Division  
Newcastle  
Work Order Reference  
**EN1700434**



Telephone : + 61 2 4014 2500

## CERTIFICATE OF ANALYSIS

**Work Order** : **EN1700434**  
**Client** : **CBASED ENVIRONMENTAL PTY LTD**  
**Contact** : All Deliverables  
**Address** : 47 BOOMERANG ST  
 CESSNOCK NSW, AUSTRALIA 2325  
**Telephone** : +61 02 6571 3334  
**Project** : Hanson Calga Dusts  
**Order number** : ---  
**C-O-C number** : ---  
**Sampler** : CARBON BASED ENVIRONMENTAL PTY LTD  
**Site** :  
**Quote number** : SYBQ/222/16  
**No. of samples received** : 6  
**No. of samples analysed** : 6

**Page** : 1 of 4  
**Laboratory** : Environmental Division Newcastle  
**Contact** :  
**Address** : 5/585 Maitland Road Mayfield West NSW Australia 2304  
**Telephone** : +61 2 4014 2500  
**Date Samples Received** : 02-Feb-2017 13:05  
**Date Analysis Commenced** : 06-Feb-2017  
**Issue Date** : 14-Feb-2017 17:13



Accreditation No. 825  
 Accredited for compliance with  
 ISO/IEC 17025 - Testing

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

**Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.**

### Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

*Signatories*

*Position*

*Accreditation Category*

Alison Graham

Supervisor - Inorganic

Newcastle - Inorganics, Mayfield West, NSW





## General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When no sampling time is provided, the sampling time will default 00:00 on the date of sampling. If no sampling date is provided, the sampling date will be assumed by the laboratory and displayed in brackets without a time component.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

Ø = ALS is not NATA accredited for these tests.

~ = Indicates an estimated value.

- Analysis as per AS3580.10.1-2003. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m<sup>2</sup>.mth as sampling data was provided by the client.



## Analytical Results

Sub-Matrix: **DEPOSITIONAL DUST**  
 (Matrix: **AIR**)

Client sample ID

Sub-Matrix: DEPOSITIONAL DUST (Matrix: AIR)				Client sample ID	CD1	CD2c	CD3	CD4	CD5
					03/01/17-02/02/17	03/01/17-02/02/17	03/01/17-02/02/17	03/01/17-02/02/17	03/01/17-02/02/17
Client sampling date / time					02-Feb-2017 00:00	02-Feb-2017 00:00	02-Feb-2017 00:00	02-Feb-2017 00:00	02-Feb-2017 00:00
Compound	CAS Number	LOR	Unit	EN1700434-001	EN1700434-002	EN1700434-003	EN1700434-004	EN1700434-005	
				Result	Result	Result	Result	Result	
EA120: Ash Content									
Ash Content	----	0.1	g/m².month	11.1	0.5	0.9	0.3	0.6	
Ash Content (mg)	----	1	mg	196	9	16	6	11	
EA125: Combustible Matter									
Combustible Matter	----	0.1	g/m².month	0.8	0.2	0.5	0.6	0.3	
Combustible Matter (mg)	----	1	mg	14	3	8	10	5	
EA141: Total Insoluble Matter									
Total Insoluble Matter	----	0.1	g/m².month	11.9	0.7	1.4	0.9	0.9	
Total Insoluble Matter (mg)	----	1	mg	210	12	24	16	16	



## Analytical Results

Sub-Matrix: <b>DEPOSITIONAL DUST</b> (Matrix: <b>AIR</b> )				Client sample ID	<b>CD6</b>	---	---	---	---
				Client sampling date / time	<b>03/01/17-02/02/17</b>	---	---	---	---
					02-Feb-2017 00:00	---	---	---	---
Compound	CAS Number	LOR	Unit	<b>EN1700434-006</b>	-----	-----	-----	-----	-----
				Result	---	---	---	---	---
<b>EA120: Ash Content</b>									
Ash Content	---	0.1	g/m <sup>2</sup> .month	<b>0.3</b>	---	---	---	---	---
Ash Content (mg)	---	1	mg	<b>6</b>	---	---	---	---	---
<b>EA125: Combustible Matter</b>									
Combustible Matter	---	0.1	g/m <sup>2</sup> .month	<b>0.4</b>	---	---	---	---	---
Combustible Matter (mg)	---	1	mg	<b>6</b>	---	---	---	---	---
<b>EA141: Total Insoluble Matter</b>									
Total Insoluble Matter	---	0.1	g/m <sup>2</sup> .month	<b>0.7</b>	---	---	---	---	---
Total Insoluble Matter (mg)	---	1	mg	<b>12</b>	---	---	---	---	---





Date: 2-2-17

Todays Collection	
Time Start:	8:25
Time Finish:	11:40

Client :  
Project :

Hanson Calga

## SURFACE WATERS

Site	Flow Rate	Odour	Sampling Time	Bottles	Water Turbidity	Water Colour	Comments
A	DAM	N	8:30	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
B			8:30	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	No Flow
C1	DAM	N	11:25	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
C2	TRUCK	N	11:30	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
D			9:20	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	DRY.
F	DAM	N	8:35	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
					CST	CLOOBG	
					CST	CLOOBG	
					CST	CLOOBG	
					CST	CLOOBG	
					CST	CLOOBG	

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE)

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

Signed:

Sampled by:

HANISH &amp; LAW

[illegible]

Work Order Reference  
**ES1702308**



Telephone : + 61-2-8784 8555



## CERTIFICATE OF ANALYSIS

Work Order	: <b>ES1702308</b>	Page	: 1 of 2
Client	: <b>CBASED ENVIRONMENTAL PTY LTD</b>	Laboratory	: Environmental Division Sydney
Contact	: All Deliverables	Contact	: Customer Services ES
Address	: 47 BOOMERANG ST CESSNOCK NSW, AUSTRALIA 2325	Address	: 277-289 Woodpark Road Smithfield NSW Australia 2164
Telephone	: +61 02 6571 3334	Telephone	: +61-2-8784 8555
Project	: HANSON QUARRY	Date Samples Received	: 02-Feb-2017 13:08
Order number	: ---	Date Analysis Commenced	: 02-Feb-2017
C-O-C number	: ---	Issue Date	: 09-Feb-2017 13:29
Sampler	: CARBON BASED ENVIRONMENTAL PTY LTD		
Site	:		
Quote number	: SYBQ/222/16		
No. of samples received	: 4		
No. of samples analysed	: 4		



Accreditation No. 825  
Accredited for compliance with  
ISO/IEC 17025 - Testing

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

**Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.**

### Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Dian Dao		Sydney Inorganics, Smithfield, NSW
Neil Martin	Team Leader - Chemistry	Chemistry, Newcastle West, NSW





## General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When no sampling time is provided, the sampling time will default 00:00 on the date of sampling. If no sampling date is provided, the sampling date will be assumed by the laboratory and displayed in brackets without a time component.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.  
 LOR = Limit of reporting  
 ^ = This result is computed from individual analyte detections at or above the level of reporting  
 Ø = ALS is not NATA accredited for these tests.  
 ~ = Indicates an estimated value.

## Analytical Results

Sub-Matrix: **WATER**  
 (Matrix: **WATER**)

Client sample ID

				A	C1	C2	F	---
Client sampling date / time				02-Feb-2017 08:50	02-Feb-2017 11:25	02-Feb-2017 11:30	02-Feb-2017 09:35	---
Compound	CAS Number	LOR	Unit	ES1702308-001	ES1702308-002	ES1702308-003	ES1702308-004	-----
				Result	Result	Result	Result	---
<b>EA005: pH</b>								
pH Value	---	0.01	pH Unit	6.42	6.84	6.53	6.05	---
<b>EA010P: Conductivity by PC Titrator</b>								
Electrical Conductivity @ 25°C	---	1	µS/cm	94	106	106	107	---
<b>EA015: Total Dissolved Solids dried at 180 ± 5 °C</b>								
Total Dissolved Solids @180°C	---	10	mg/L	72	68	68	76	---
<b>EA025: Total Suspended Solids dried at 104 ± 2°C</b>								
Suspended Solids (SS)	---	5	mg/L	<5	9	<5	16	---
<b>EP020: Oil and Grease (O&amp;G)</b>								
Oil & Grease	---	5	mg/L	<5	<5	<5	<5	---





Today's Collection	
Time Start:	8:45
Time Finish:	12:30

Date: 2.2.17

Client : Hanson Calga

Project :

## GROUNDWATERS

Site	DEPTH	Odour	Water Turbidity	Water Colour	1		2		Bottles (Apr/Oct)	Downloaded Logger? (Y/N)
					pH	EC	pH	EC		
CQ3	10.97	Y	CST	CLO O B G	6.54	154.7 uS	6.44	152.0 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ4	10.94	N	CST	CLO O B G	5.05	110.8 uS	5.05	109.5 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ5	8.11	N	CST	CLO O B G	4.24	164.4 uS	4.25	167.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CQ6			CST	CLO O B G	Covered over w/ Paddock.				1x 250ml GP, 1x 500mL GP, 1RP	
CQ7	7.07	N	CST	CLO O B G	4.42	100.1 uS	4.41	102.7 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ8	7.18	N	CST	CLO O B G	4.30	124.6 uS	4.28	125.2 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ9			CST	CLO O B G	STAND PIPE BENT / Broken				1x 250ml GP, 1x 500mL GP, 1RP	
CQ10	25.44	N	CST	CLO O B G	4.71	128.7 uS	4.67	130.2 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ11S	11.19	N	CST	CLO O B G	5.15	135.6 uS	5.07	134.8 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ11D	12.44	N	CST	CLO O B G	4.73	143.8 uS	4.71	142.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ12	5.45	N	CST	CLO O B G	4.25	120.3 uS	4.25	120.5 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
CQ13	14.73	N	CST	CLO O B G	4.29	177.8 uS	4.31	178.3 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CP3			CST	CLO O B G	GONE				1x 250ml GP, 1x 500mL GP, 1RP	
CP4	11.75		CST	CLO O B G	Pump Not Working				1x 250ml GP, 1x 500mL GP, 1RP	
CP5	9.77	N	CST	CLO O B G	4.32	180.0 uS	4.32	182.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP6	11.83	N	CST	CLO O B G	4.36	164.7 uS	4.31	165.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP7	5.29	N	CST	CLO O B G	4.74	103.5 uS	4.71	103.7 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP8	21.93	N	CST	CLO O B G	4.34	119.2 uS	4.27	121.6 uS	1x 250ml GP, 1x 500mL GP, 1RP	
MW7	16.67	N	CST	CLO O B G	4.49	102.3 uS	4.51	103.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	Y
MW8	8.05	N	CST	CLO O B G	4.91	80.4 uS	4.84	77.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
MW9	23.60	N	CST	CLO O B G	4.65	80.0 uS	4.60	81.3 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
MW10			CST	CLO O B G	NO Access - UNSAFE TRACKS.				1x 250ml GP, 1x 500mL GP, 1RP	
MW13			CST	CLO O B G	"		"		1x 250ml GP, 1x 500mL GP, 1RP	
MW16			CST	CLO O B G	"		"		1x 250ml GP, 1x 500mL GP, 1RP	
MW17			CST	CLO O B G	NO Access - TREES over 22m				1x 250ml GP, 1x 500mL GP, 1RP	

Turbidity: C=Clear, S=Slight, T=Turbid (CIRCLE)

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

pH/EC meter #: 12

Signed:

Sampled by:

HAMISH &amp; IAN