

Greencap - NAA Pty Ltd ABN: 76 006 318 010 Level 2 / 11 Khartoum Road

Level 2 / 11 Khartoum Road North Ryde NSW 2113 Australia P: (02) 9889 1800

www.greencap.com.au

F: (02) 9889 1811

Asbestos Fibre Air Monitoring Report

Our Ref: C107605:J141136.002-20151002
Client: Hanson Construction Materials Pty Ltd

Client Address: Locked Bag 5260

Parramatta NSW 2124

Attention: Pere Riini - Quarry Manager

Job Location: East Guyong Quarry, Mitchell Highway, East Guyong NSW

Report Date: Monday 12th October 2015
Test Date: Friday 2nd October 2015

Sampling Type: Control

Sampled By: Pumps On: Pere Riini (Hanson)

Pumps Off: Pere Riini (Hanson)

Method: Filters examined in accordance with Safe Work Australia's Guidance Note on the Membrane Filter Method for the Estimation of Airborne Asbestos Fibres, 2nd Edition, 2005 [NOHSC:3003: (2005)] – Refer Internal Laboratory Test Method NALAB 301.

Filter No.	Test Type Sample Location	Sample Period Start-Finish	Average Flow Rate (L/min)	Fibres/ Fields	Result(s) Fibres/mL			
Background asbestos air monitoring throughout various locations across the site								
G1049106	Field Blank	_	-	0.0/100	-			
G1049104	Location 1 – Near Southern Boundary of Site, Access Road to Residence (No.3472) off Mitchell Highway, approx. 120 metres North of South Site Boundary – On barbed wire fence	0742 – 1432	1.00	0.5/100	< 0.01			
G1049093	Location 3 – Near Southern Boundary (SE Corner) of Site, Adjacent to New Access Road Entry (No.3410) off Mitchell Highway, approx. 30 metres from South Site Boundary – On barbed wire fence	0748 – 1439	1.00	0.0/100	< 0.01			
G1049096	Location 4 – Near Eastern Boundary (near SE Corner) of Site, approx. 70 metres West of Shed, Access Road – On barbed wire fence	0754 – 1444	1.00	0.0/100	< 0.01			
G1049089	Location 5 – Near Eastern Boundary (near Centre) of Site, approx. 50 metres West of East Site Boundary – On fencing post	0759 – 1451	1.00	0.0/100	< 0.01			
G0490319	Location 6 – Western Boundary of Proposed Quarry Pit (near Western Site Boundary) – On barbed wire fence	0809 – 1458	1.00	0.5/100	< 0.01			

C107605:J141136.002-20151002 Page 1 of 3



Filter No.	Test Type Sample Location	Sample Period Start-Finish	Average Flow Rate (L/min)	Fibres/ Fields	Result(s) Fibres/mL
G04970591	Location 8 – Western Boundary (near NW Corner) of Site – On barbed wire fence	0814 – 1505	1.00	0.0/100	< 0.01
G1049088	Location 10 – Near Northern Boundary of Site (near NE Corner Site) – On fencing post	0819 – 1511	1.00	2.0/100	< 0.01

Note: Pere Riini of Hanson Construction Materials Pty Ltd has been formally trained as a third party for volume measurement. Greencap – NAA Pty Ltd assume responsibility for the data collected.



Approved Counter: Simon Day



Approved Signatory: Simon Day



This document shall not be reproduced, except in full.


Accredited for compliance with ISO/IEC 17025.

Corporate Site No. 5450, Site No. 3402 Sydney Laboratory.

The results of the tests, calibrations and/or measurements included in this document are traceable to Australian/national standards.



Figure 1 – Air Monitoring Location

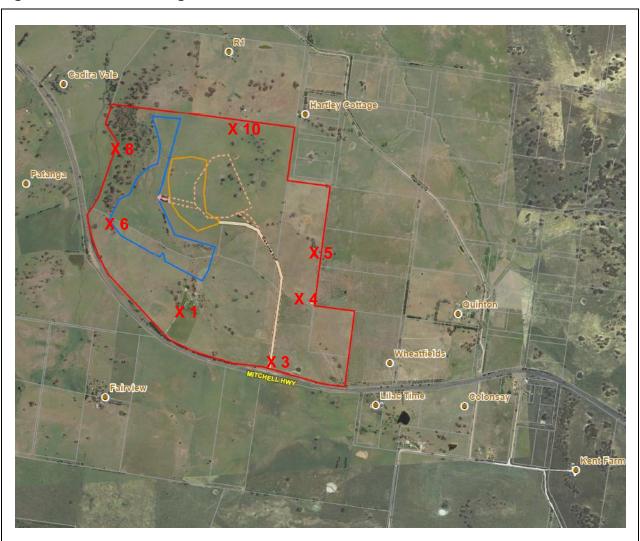

Air Monitoring Sampling Plan East Guyong Quarry Site

> Monitoring Date: Friday 2nd October 2015

Legend

X 1 Air monitoring locations

Project Boundary

Quarry Boundary

Infrastructure Area Boundary

Air Monitoring Location Coordinates

 Location 1:
 709,104mE; 6300,660mN
 Location 6:
 708,803mE; 6301,185mN

 Location 3:
 709,601mE; 6300,370mN
 Location 8:
 708,824mE; 6301,587mN

 Location 4:
 709,729mE; 6300,716mN
 Location 10:
 709,465mE; 6301,633mN

 Location 5:
 709,870mE; 6300,905mN

Weather Conditions

General Fine, Windy Wind Direction
Rainfall Wind Speed