

Carbon Based Environmental Pty Limited ABN 74 102 920 285

Rocla Quarry Products Calga Quarry

Environmental Monitoring

Dust Deposition Gauges, Surface and Ground Waters and Meteorological Station

August 2010

Colin Davies BSc MEIA CENVP **Environmental Scientist** 16 September 2010

© Carbon Based Environmental Pty Limited 2010. This document was prepared solely for the original recipient and no third party must rely or use any information without the consent of Carbon Based Environmental Pty Limited. Carbon Based Environmental Pty Limited and the author accept no responsibility to any third party who uses or relies upon the information contained in this report.

Executive Summary

Carbon Based Environmental is contracted by Rocla Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- Dust Deposition Gauges;
- Surface Waters:
- Groundwaters: and
- Meteorological Station.

This report was prepared by Carbon Based Environmental and includes the following;

- Dust Deposition results for August 2010;
- Surface Water quality results for August 2010;
- Groundwater depth and quality results for August 2010; and
- Meteorological report for August 2010.

The August 2010 dust deposition results were generally similar to July 2010. All sites, on a year to date average basis, are currently below the Air Quality Management Plan exceedence level of $3.7g/m^2$.month. Results were found to be representative of dust levels as determined by the Australian Standard.

Surface water samples were collected for the normal monthly sampling event on the 1 September 2010 at sites A, C and F. Site B and D were dry. At the time of sample collection, there was no water discharge observed from the site. Results show generally good quality water with most sites sampled maintaining low Electrical Conductivity, low Total Dissolved Solids, low Total Suspended Solids and no detectable Oil and Grease. pH levels remained stable and were within the slightly acidic range.

Groundwaters were sampled for normal monthly monitoring on 1 September 2010. Groundwater depths increased at the majority of monitoring bores this month, indicating water moving away from the surface. pH and EC levels remained relatively steady.

The meteorological station data recovery for the month was approximately 100%. The predominant winds were from the W - WSW, with strongest winds from the SSW and WSW. Recorded rainfall on site for August was 32.8mm, which was below that recorded at the BOM Peats Ridge Station and below the Peats Ridge long-term average for August. Results are detailed below:

Rocla Calga Quarry 32.8mm
BOM Peats Ridge* 44.4mm
BOM Gosford* 41.6mm
BOM Peats Ridge Long term mean for August* 79.8mm

Note: Differences in the daily rainfall readings between BOM and the Rocla station may occur due to BOM stations reporting rainfall at 9am and the Rocla station recording rainfall at midnight.

^{*}Data sourced from Bureau of Meteorology (BOM) website (<u>www.bom.gov.au</u>)

1.0 Sampling Program

Rocla Calga Quarry conducts environmental monitoring in accordance to Development Consent, DEC (EPA) licence and Environmental Management Plans. Carbon Based Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. Carbon Based Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 "Methods for Sampling and Analysis of Ambient Air Method 10.1 Determination of Particulates—Deposited Matter—Gravimetric Method". Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m².month.

Surface waters are sampled in accordance with Australian Standards AS5667.1 "Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples", AS5667.6 "Water Quality Sampling—Guidance on sampling of rivers and streams" and AS5667.4 "Water Quality Sampling—Guidance on sampling from lakes, natural and man-made". Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards AS5667.1 "Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples" and AS5667.11 "Water Quality Sampling—Guidance on sampling of ground waters". Groundwater monitoring sites are sampled at least bi-monthly for water quality and at least quarterly for water level. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real time display. Wind parameters are measured according to Australian Standard AS 2923 "Ambient Air— Guide for Measurement of Horizontal Wind for Air Quality Applications".

The weather stations have the following sensor configuration;

- Air temperature
- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

Carbon Based Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

2.0 Monthly Results

2.1 Dust Deposition Gauges

Table 1 displays the results for August 2010 and the project average. Results are in g/m².month.

Table 1: Dust Deposition results: 2-Aug-2010 to 2-Sep-2010

Site	Monthly Insoluble Solids g/m².month	Monthly Ash Residue g/m².month	Monthly Combustible Matter g/m².month	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids g/m².month
CD1	0.4	0.2	0.2	50	1.8
CD2c	0.3	0.2	0.1	67	1.3
CD3	0.1	0.1	< 0.1	100	1.0
CD4	0.1	0.1	< 0.1	100	1.1
CD5	0.1	0.1	< 0.1	100	1.0
CD6	0.2	0.1	0.1	50	1.3

Insoluble Solids marked with an * indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m².month, the Development Consent annual average amenity criteria at residential locations. The current rolling annual average is calculated from September 2009 to August 2010.

NA= Not Available.


CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 1** below. The laboratory analysis is provided in **Appendix 1**.


The predominant winds were from the W - WSW, with strongest winds from the SSW and WSW.

Figure 1: Dust Deposition Charts


Rocla Calga Quarry Dust Gauge CD1 - Insoluble Matter




Rocla Calga Quarry Dust Gauge CD2c - Insoluble Matter

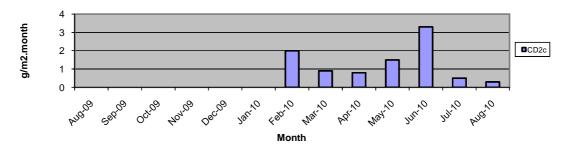


Rocla Calga Quarry Dust Gauge CD3 - Insoluble Matter




Rocla Calga Quarry Dust Gauge CD4 - Insoluble Matter



Rocla Calga Quarry Dust Gauge CD5 - Insoluble Matter

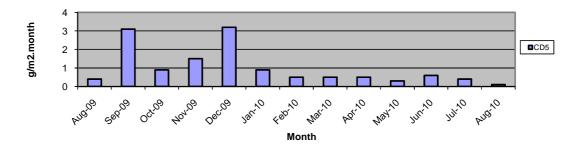

Rocla Calga Quarry Dust Gauge CD6 - Insoluble Matter



2.2 Water Monitoring

2.2.1 Surface Waters

Monthly surface water monitoring was conducted on the 1 September 2010 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

Table 2: Monthly surface water monitoring – August grab sample results

Site	Observed Flow Rate	Water Colour	Turbidity	pН	EC (μS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
A	Still	Clear	Clear	4.97	85	69	5	<5
В	Dry							
C	Still	Clear	Clear	5.43	115	87	4	<5
D	Dry							
F	Still	Clear	Clear	5.80	92	52	4	<5

At the time of sampling, there were no water discharges off site from any sampling location. Site B and D were dry at the time of sampling. The samples were collected and analysed for a monthly sampling event. Results show generally good water quality with pH within the slightly acidic range, low Electrical Conductivity, low Total Dissolved Solids, low Total Suspended Solids and no detectable Oil and Grease.

2.2.2 Ground Waters

Groundwaters were sampled on 1 September 2010. Water quality tests for pH and electrical conductivity were conducted by Carbon Based Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and Electrical Conductivity (+/- 5%) was obtained between samples. Data is displayed in **Table 3** and **Figures 2 to 5**.

Groundwater depths increased at the majority of monitoring bores this month, indicating water moving away from the surface. The CP series of bores generally show larger increases and decreases in depth to water due to pumping from the bores. Longer term monitoring is required to fully evaluate groundwater depth trends.

pH and EC remained relatively steady at all sites. Detailed biannual water quality monitoring was conducted during April 2010 and is next due in October 2010.

Table 3: Ground Water Quality Data

Reference	Bore	Type	Depth to water	Depth to water	pН	Electrical
			TOC (m)	TOC		Conductivity
			April 06	(m)		(uS/cm)
				This report	This report	This report
CQ1	Voutos	* Monitor	20.59	19.72	4.5	120
CQ3	Voutos	* Monitor	10.53	10.68	5.6	120
CQ4	Voutos	* Monitor	8.78	7.98	4.6	80
CQ5	Gazzana	DIP Only	8.69	6.29	4.1	150
CQ6	Gazzana	DIP Only	16.00	11.51	4.0	170
CQ7	Gazzana	* Monitor	6.89	6.67	4.3	90
CQ8	Gazzana	* Monitor	11.03	6.63	4.1	150
CQ9	Gazzana	DIP Only	10.10	9.26	4.2	110
CQ10	Voutos	* Monitor	NI	22.61	5.3	180
CQ11S	Gazzana	* Monitor	NI	9.47	4.3	150
CQ11D	Gazzana	* Monitor	NI	10.71	4.9	130
CQ12	Gazzana	* Monitor	NI	4.24	4.1	140
CQ13	Kashouli	* Monitor	NI	13.30	4.7	190
CP3	Gazzana	Domestic	10.40	8.30	4.4	140
CP4	Kashouli	Domestic	13.63	10.25	4.9	210
CP5	Kashouli	Domestic	16.61	7.90	4.5	240
CP6	Kashouli	Domestic	16.27	10.17	4.1	200
CP7	Kashouli	Production	8.56	3.16	4.3	170
CP8	Rozmanec	Domestic	22.17	NR	NR	NR
MW7	Rocla Bore	* Monitor	15.76	16.15	4.7	120
MW8	Rocla Bore	* Monitor	9.82	7.77	4.6	80
MW9	Rocla Bore	* Monitor	22.44	21.79	4.2	80
MW10	Rocla Bore	* Monitor	15.41	13.59	4.1	130
MW13	Rocla Bore	DIP Only	NI	7.84	4.7	100
MW16	Rocla Bore	DIP Only	NI	8.43	4.3	110

Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to access restrictions.

NR = Not Required by resident.

* = Logger Installed.


NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.


Shading is used to indicate the following trends in water depth (compared to the last reading):

I	Increase to ground water depth (water moved away from surface)
İ	Decrease to ground water depth (water moved towards surface)
İ	Stable water depth (+/- 0.01m)


Available groundwater loggers were downloaded and will be forwarded to the Rocla Calga Quarry groundwater consultant.

Figures 2 to 5: Groundwater Depth Charts.




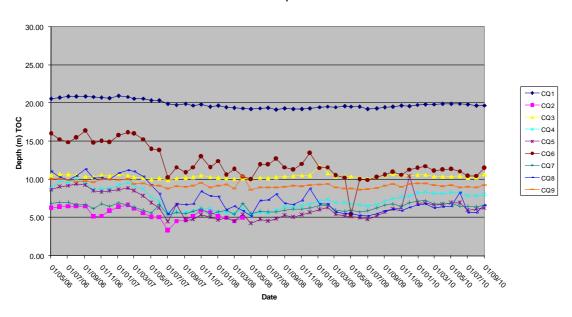


Rocla Calga Groundwaters - Quarry Bores CQ10 to CQ13 Water depth TOC

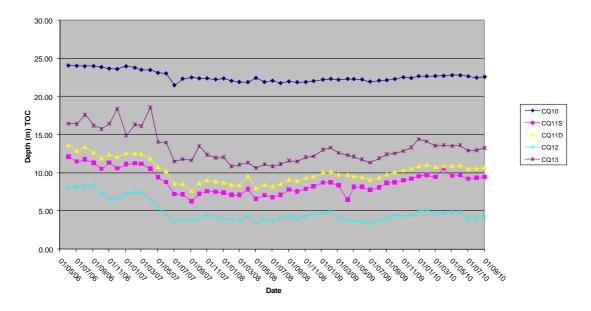

Rocla Calga Groundwaters - Quarry Bores CP3 to CP8 Water Depth TOC

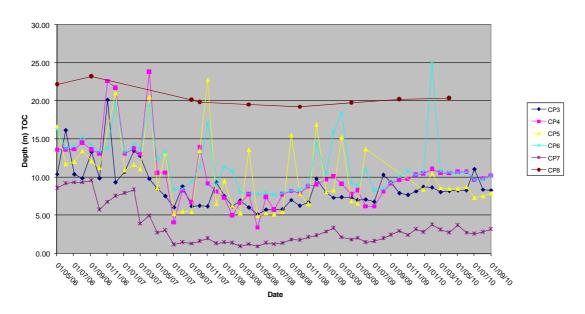

Rocia Calga Groundwaters - Quarry Bores MW7 to MW16 Water Depth TOC

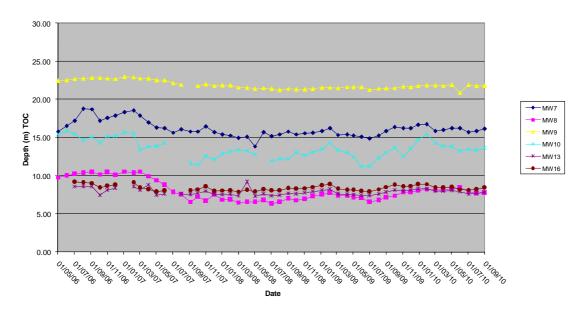

2.3 Meteorological Monitoring

The Rocla Calga Quarry weather station data recovery in August was approximately 100%. The weather station data follows and includes;

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

Monthly weather statistics from two nearby Bureau of Meteorology (BOM) stations, Peats Ridge and Gosford are included in **Appendix 2** for comparison purposes.

Data for August 2010 shows rainfall at the Rocla Calga Quarry below that which was recorded at nearby Peats Ridge BOM station and below that which was recorded at nearby Gosford BOM station. The rainfall comparison is provided below:

Rocla Calga Quarry	32.8mm
BOM Peats Ridge*	44.4mm
BOM Gosford*	41.6mm
BOM Peats Ridge Long term mean for August*	79.8mm


^{*}Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au)


Results are displayed in the following table and figures.

2.3.1 Monthly Meteorological Data Summary


Summary	Aug-10		Rocla - Cal	lga																		
Date	Min Temp	Av Temp	Max Temp	Min %RH	Av %RH	Max %RH	RAIN mm	ET mm	Min WS	Av WS	Max WS	Min wind chill	Max Heat index	Min Atm P	Av Atm P	Max Atm P	Min Solar Rad	Av Solar Rad	Max Solar Rad	Min Data %	Av data %	Max Data %
1/08/2010	7.4	11.7	17.4	41	62	79	0.4	3.0	1.8	5.2	17	4.9	16.0	1013.2	1017.1	1020.0	0	68.9	612	89.8	97.2	100
2/08/2010	6.9	9.4	13.1	47	65	90	6.8	2.8	3.6	5.9	17	3.1	12.0	1010.9	1013.4	1015.8	0	78.4	697	77.8	95.3	100
3/08/2010	8.6	11.3	15.0	63	81	95	12.0	1.6	0.9	4.7	17.9	5.4	14.3	1010.6	1015.4	1018.8	0	51.2	441	61.4	84.8	98.2
4/08/2010	5.9	10.9	17.8	42	71	93	0.0	1.7	0	1.9	8.5	5.1	16.4	1013.8	1016.5	1018.6	0	78.2	713	60.5	87.8	100
5/08/2010	6.1	9.9	14.8	41	62	79	0.0	2.1	0.9	2.8	8	3.6	13.4	1014.8	1016.7	1018.3	0	74.3	660	70.5	92.8	100
6/08/2010	4.6	8.9	15.0	42	66	80	0.0	2.0	0	1.8	9.4	2.8	13.5	1017.7	1019.6	1022.8	0	86.5	635	81	96.5	100
7/08/2010	5.2	8.8	14.1	32	69	91	0.0	1.9	0	2.1	8.9	3.2	13.0	1021.1	1022.8	1024.5	0	85.0	648	89.5	98.0	100
8/08/2010	4.0	9.1	16.0	47	79	94	0.0	1.5	0	0.9	5.4	4.0	14.8	1018.2	1020.5	1022.6	0	94.7	678	96.8	99.2	100
9/08/2010	4.2	10.2	17.5	49	81	97	0.2	1.5	0	0.5	4.9	4.3	16.6	1019.7	1021.0	1023.2	0	87.7	640	86.3	95.8	100
10/08/2010	8.3	12.2	14.6	84	96	99	10.4	0.4	0	1.5	8.5	7.9	14.7	1010.1	1015.2	1020.1	0	27.8	149	81.3	91.8	100
11/08/2010	10.3	12.3	14.7	46	67	99	0.0	3.1	1.3	5.8	15.6	7.4	13.6	1000.0	1005.9	1010.9	0	93.9	720	73.1	88.5	98.2
12/08/2010	10.3	11.9	15.0	45	61	72	0.4	3.7	2.7	6.3	15.2	7.0	13.7	997.8	1002.1	1007.8	0	94.9	731	78.7	90.9	99.1
13/08/2010	7.7	11.3	16.8	45	64	88	0.0	2.3	0	2.5	11.2	6.4	15.4	1007.8	1011.3	1015.0	0	83.9	822	87.4	97.2	100
14/08/2010	6.1	11.8	18.8	38	69	93	0.0	2.3	0	2.1	10.3	5.0	17.3	1008.0	1011.9	1015.6	0	100.4	680	93	98.8	100
15/08/2010	9.9	13.8	17.9	40	57	71	0.0	3.2	0.4	4.2	13.4	9.2	16.7	1003.7	1006.2	1009.1	0	80.6	677	92.4	99.4	100
16/08/2010	10.1	13.1	16.4	37	55	72	0.0	4.1	0.9	5.6	17	8.7	14.9	1008.8	1011.5	1017.3	0	113.5	688	85.1	97.5	100
17/08/2010	5.5	9.6	15.7	28	54	68	0.0	2.3	0	1.5	7.2	3.4	13.6	1017.4	1020.1	1021.9	0	114.3	704	89.2	98.6	100
18/08/2010	3.7	11.5	20.4	39	68	90	0.2	2.3	0	1.5	11.2	3.7	19.2	1008.6	1015.4	1021.2	0	103.9	720	93.6	98.4	100
19/08/2010	14.2	17.4	22.3	32	61	85	0.2	4.5	2.2	5.7	18.3	13.2	21.1	1004.3	1006.9	1009.4	0	108.0	710	93.9	99.7	100
20/08/2010	8.9	12.8	17.1	28	46	67	0.0	4.4	1.8	4.6	13.4	6.4	14.9	1008.6	1011.6	1016.0	0	137.8	712	97.1	99.7	100
21/08/2010	6.5	10.5	15.0	40	51	62	0.0	4.3	2.2	5.1	14.3	2.9	13.4	1015.0	1016.5	1019.3	0	138.4	708	98	99.5	100
22/08/2010	4.6	10.2	16.7	38	64	82	0.0	2.4	0	1.3	5.8	3.7	15.1	1019.1	1020.7	1023.3	0	136.5	719	92.7	99.5	100
23/08/2010	8.6	10.2	11.7	69	87	95	2.2	1.0	0	1.2	5.8	7.7	11.4	1009.4	1013.9	1018.9	0	47.3	271	96.8	99.5	100
24/08/2010	8.1	12.7	17.8	35	59	83	0.0	3.8	0.4	4.3	14.3	7.3	16.1	1006.9	1009.4	1012.5	0	145.0	754	88.9	98.4	100
25/08/2010	9.4	12.2	16.1	28	45	64	0.0	4.2	0.4	4.1	12.1	6.3	13.9	1004.1	1005.8	1007.4	0	151.3	770	87.7	98.5	100
26/08/2010	9.4	11.3	14.8	41	53	70	0.0	4.5	4.5	6.5	17	6.2	13.2	1000.7	1002.9	1004.5	0	125.1	936	92.7	98.6	100
27/08/2010	9.3	12.1	16.2	44	57	69	0.0	4.0	4	5.8	14.3	6.2	14.7	1004.2	1008.7	1015.8	0	114.2	645	90.6	97.1	100
28/08/2010	6.7	10.3	15.9	37	60	85	0.0	3.3	0	2.0	9.8	5.1	14.3	1015.9	1021.1	1026.4	0	179.0	756	91.8	98.1	100
29/08/2010	5.2	10.4	16.9	53	77	90	0.0	1.9	0	0.9	5.8	5.1	15.7	1024.6	1026.8	1028.9	0	122.7	794	91.8	99.4	100
30/08/2010	7.9	12.1	18.3	52	80	95	0.0	2.2	0	0.6	5.8	8.0	17.4	1022.9	1025.1	1026.8	0	149.5	893	92.1	99.3	100
31/08/2010	8.1	14.1	21.7	40	71	96	0.0	3.2	0	1.4	9.4	8.1	20.1	1017.9	1021.7	1025.4	0	183.2	742	90.9	99.4	100
Monthly	3.7	11.4	22.3	28	66	99	32.8	85.3	0	3.2	18.3	2.8	21.1	997.8	1014.6	1028.9	0	105.0	936	60.5	96.6	100

2.3.2 Monthly weather charts

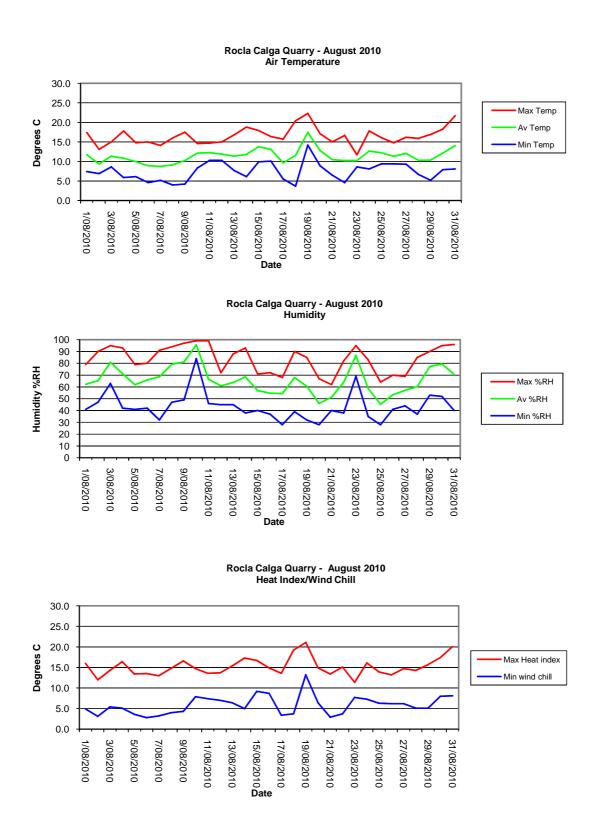


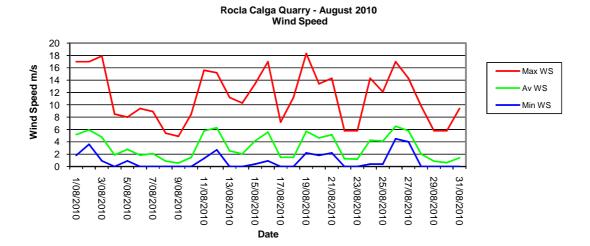


Rocla Calga Quarry - August 2010 Solar Radiation

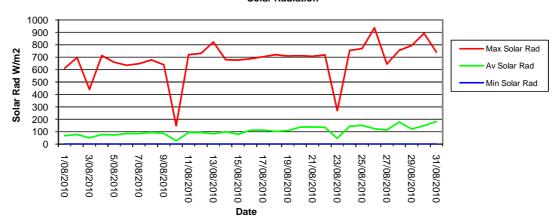


Rocla Calga Quarry - August 2010 Atmospheric Pressure

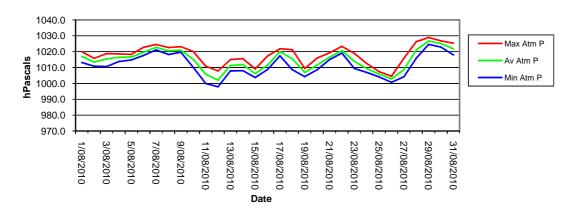




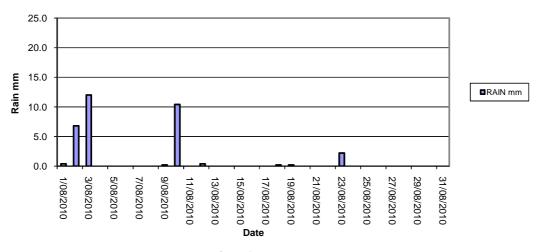

Rocla Calga Quarry - August 2010 Evapotranspiration

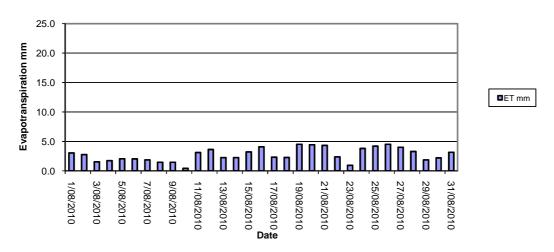


Rocla Calga Quarry - August 2010 Data Reception

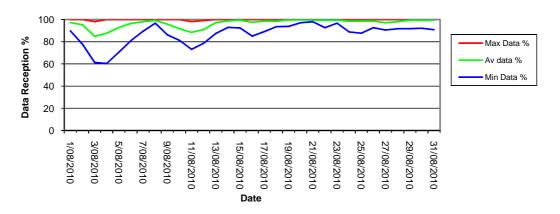

2.3.3 Windrose plot

Frequency plot of the average wind speed and average direction over each 15 minute sampling period. Wind is considered calm when less than a 15 minute average of 1m/s.

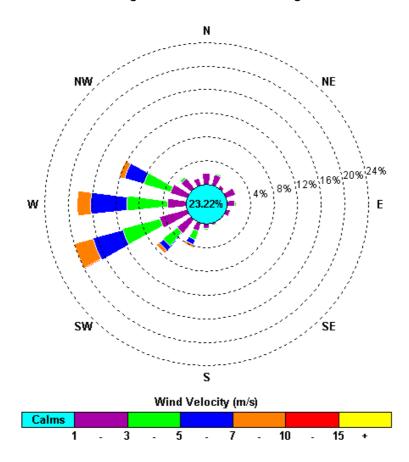

00:00, 1 August 2010 – 23:45, 31 August 2010

The predominant winds were from the W - WSW, with strongest winds from the SSW and WSW. The maximum wind speed was 18.3 m/s from the SW.

Carbon Based Environmental Pty Limited

Appendix 1 Laboratory Certificates

ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES



Environmental Division

CERTIFICATE OF ANALYSIS

Work Order : **EN1002095** Page : 1 of 4

Client : CARBON BASED ENVIRONMENTAL Laboratory : Environmental Division Newcastle

Contact : MS RENAE MIKKA Contact : Peter Keyte

Address : 47 BOOMERANG ST Address : 5 Rosegum Road Warabrook NSW Australia 2304

CESSNOCK NSW, AUSTRALIA 2325

 Telephone
 : +61 49904443
 Telephone
 : 61-2-4968-9433

 Facsimile
 : +61 02 49904442
 Facsimile
 : +61-2-4968 0349

Project : ROCLA CALGA DUSTS QC Level : NEPM 1999 Schedule B(3) and ALS QCS3 requirement

Order number : ----

 C-O-C number
 : -- Date Samples Received
 : 01-SEP-2010

 Sampler
 : -- Issue Date
 : 10-SEP-2010

Site : ----

Quote number : SY/269/10 No. of samples analysed : 6

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for release.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

This document is issued in accordance with NATA accreditation requirements.

Accredited for compliance with ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

: 6

Signatories Position Accreditation Category

No. of samples received

Peter Keyte Newcastle Manager Newcastle

Environmental Division Newcastle
Part of the ALS Laboratoru Group

5 Rosegum Road Warabrook NSW Australia 2304

Tel. +61-2-4968 9433 Fax. +61-2-4968 0349 www.alsglobal.com

A Campbell Brothers Limited Company

Page : 2 of 4
Work Order : EN1002095

Client : CARBON BASED ENVIRONMENTAL

Project : ROCLA CALGA DUSTS



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insuffient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for processing purposes. If the sampling time is displayed as 0:00 the information was not provided by client.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

Analysis as per AS3580.10.1-2003. Samples passed through a 1mm sieve prior to analysis. NATA accreditation is not held for results reported in g/m².mth. Period sampled: 02/08/2010 - 01/09/2010.

Page : 3 of 4
Work Order : EN1002095

Client : CARBON BASED ENVIRONMENTAL

Project : ROCLA CALGA DUSTS



Analytical Results

Sub-Matrix: DUST		Cli	ent sample ID	CD1	CD2C	CD3	CD4	CD5
	Ci	ient sampli	ing date / time	01-SEP-2010 15:00	01-SEP-2010 15:00	01-SEP-2010 15:00	01-SEP-2010 15:00	01-SEP-2010 15:00
Compound	CAS Number	LOR	Unit	EN1002095-001	EN1002095-002	EN1002095-003	EN1002095-004	EN1002095-005
EA120: Ash Content								
Ash Content		0.1	g/m².month	0.2	0.2	0.1	0.1	0.1
Ash Content (mg)		1	mg	3	4	1	2	1
EA125: Combustible Matter								
Combustible Matter		0.1	g/m².month	0.2	0.1	<0.1	<0.1	<0.1
Combustible Matter (mg)		1	mg	4	1	<1	<1	<1
EA141: Total Insoluble Matter								
Total Insoluble Matter	rer 0.1 g/m².m		g/m².month	0.4	0.3	0.1	0.1	0.1
Total Insoluble Matter (mg)		. 1 mg 7		5	1	2	1	

Page : 4 of 4 Work Order : EN1002095

Client : CARBON BASED ENVIRONMENTAL

Project : ROCLA CALGA DUSTS

ALS

Analytical Results

Sub-Matrix: DUST		Cli	ent sample ID	CD6	 	
	C	lient sampli	ing date / time	01-SEP-2010 15:00	 	
Compound	CAS Number	LOR	Unit	EN1002095-006	 	
EA120: Ash Content						
Ash Content		0.1	g/m².month	0.1	 	
Ash Content (mg)		1	mg	2	 	
EA125: Combustible Matter						
Combustible Matter		0.1	g/m².month	0.1	 	
Combustible Matter (mg)		1	mg	1	 	
EA141: Total Insoluble Matter						
Total Insoluble Matter		0.1	g/m².month	0.2	 	
Total Insoluble Matter (mg)		1	mg	3	 	

ALS Laboratory Group

ANALYTICAL CHEMISTRY & TESTING SERVICES



Environmental Division

CERTIFICATE OF ANALYSIS

Work Order : **ES1017539** Page : 1 of 3

Client : CARBON BASED ENVIRONMENTAL Laboratory : Environmental Division Sydney

Contact : MS RENAE MIKKA Contact : Charlie Pierce

Address : 47 BOOMERANG ST Address : 277-289 Woodpark Road Smithfield NSW Australia 2164

CESSNOCK NSW, AUSTRALIA 2325

 Telephone
 : +61 49904443
 Telephone
 : +61-2-8784 8555

 Facsimile
 : +61 02 49904442
 Facsimile
 : +61-2-8784 8500

Project : ROCLA QUARRY : NEPM 1999 Schedule B(3) and ALS QCS3 requirement

Order number : ----

C-O-C number : ---- Date Samples Received : 01-SEP-2010
Sampler : CBE Issue Date : 07-SEP-2010

No. of samples received : 3

Quote number : SY/269/10 No. of samples analysed : 3

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



Site

release.

NATA Accredited Laboratory 825

This document is issued in accordance with NATA accreditation requirements.

Accredited for compliance with ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category	
Ankit Joshi	Inorganic Chemist	Inorganics	
Hoa Nguyen	Inorganic Chemist	Inorganics	
Peter Keyte	Newcastle Manager	Newcastle	

Environmental Division Sydney
Part of the ALS Laboratory Group

277-289 Woodpark Road Smithfield NSW Australia 2164

Tel. +61-2-8784 8555 Fax. +61-2-8784 8500 www.alsglobal.com

A Campbell Brothers Limited Company

Page : 2 of 3
Work Order : ES1017539

Client : CARBON BASED ENVIRONMENTAL

Project : ROCLA QUARRY



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insuffient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When date(s) and/or time(s) are shown bracketed, these have been assumed by the laboratory for processing purposes. If the sampling time is displayed as 0:00 the information was not provided by client.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

Page : 3 of 3 Work Order : ES1017539

Client : CARBON BASED ENVIRONMENTAL

Project : ROCLA QUARRY

ALS

Analytical Results

Cula Matrice MATER		Cli	ent sample ID	Α	С		
Sub-Matrix: WATER		Cit	ent sample 1D	Α	C	r	
	Ci	lient sampli	ng date / time	[01-SEP-2010]	[01-SEP-2010]	[01-SEP-2010]	
Compound	CAS Number	LOR	Unit	ES1017539-001	ES1017539-002	ES1017539-003	
EA005: pH							
pH Value		0.01	pH Unit	4.97	5.43	5.80	
EA010P: Conductivity by PC Titrator							
Electrical Conductivity @ 25°C		1	μS/cm	85	115	92	
EA015: Total Dissolved Solids							
^ Total Dissolved Solids @180°C	GIS-210-010	1	mg/L	69	87	52	
EA025: Suspended Solids							
^ Suspended Solids (SS)		1	mg/L	5	4	4	
EP020: Oil and Grease (O&G)							
^ Oil & Grease		5	mg/L	<5	<5	<5	

Appendix 2

Additional Bureau of Meteorology Data from Peats Ridge and Gosford Monitoring Stations

Peats Ridge, New South Wales August 2010 Daily Weather Observations



		Tem	ıps	ъ.	-	•	Max	wind g	ust			9a	m					3р	m		
Date	Day	Min	Max	Rain	Evap	Sun	Dirn	Spd	Time	Temp	RH	Cld	Dim	Spd	MSLP	Temp	RH	Cld	Dirn	Spd	MSLP
		*C	*C	mm	mm	hours		km/h	local	*C	96	eighths		km/h	hPa	·c	%	eighths		km/h	hPa
1	Su	6.7	18.0	0	3.2					12.1	69	0	SW	9		17.2	51	0	NE	4	
2	Mo	5.7	13.0	1.8	2.4					9.6	59	2	NW	9		12.7	53	0	S	6	
3	Tu	7.4	14.8	21.0	3.0					10.6	95	8	SW	6		14.7	67	2	S	4	
4	We	5.2	17.7	2.4	2.4					10.2	86	0	N	4		17.0	48	0	NW	4	
5	Th	3.8	15.4	0	2.8					9.1	69	4	NW	9		13.0	55	4	S	4	
6	Fr	3.8	14.1	0	2.2					9.0	69	0	NW	9		13.6	42	1	S	9	
7	Sa	4.4	14.0	0	1.2					9.6	62	0	SW	4		13.5	36	0	N	4	
8	Su	3.2	16.6	0	2.0					9.6	79	5	SW	- 4		15.1	60	2	ESE	9	
9	Mo	3.6	18.7	0	0.8					10.1	86	0	N	4		16.4	54	0	NW	4	
10	Tu	5.2	16.5	2.2	1.4					13.6	81	8	NW	4		14.1	97	8	NW	4	
11	We	7.6	15.0	7.8	0.4					10.6	69	8	SW	19		13.4	54	4	NW	4	
12	Th	9.6	15.5	0	2.8					12.0	59	2	SSW	19		13.5	57	8	W	4	
13	Fr	6.7	16.8	0.4	2.4					12.1	56	1	WSW	28		15.4	50	0	N	4	
14	Sa	6.1	19.5	0	1.8					11.4	70	0	NW	4		17.4	41	0	NE	4	
15	Su	11.0	18.1	0	1.6					14.2	58	0	SW	4		17.0	45	0	SW	4	
16	Mo	9.8	16.8	4.4	3.6					13.0	61		W	28		15.9	43 35	0	NW	4	
17	Tu	4.2	16.0	0	3.8					7.0	62	1	NW	4		15.6	30	U	E	4	
18	We Th	4.5	20.1	0	2.2					11.9	66 72	2	NE NE	4		22.2	20		100		
19	Fr	11.2	17.7	1.0	2.4 3.8					17.8	72 55	1		9		22.2 17.0	38 38	2	W	4	
20		6.0	17.7	0						13.2	- 1	0	NW	4				0	NW	4	
21	Sa Su	4.0	16.9	0 2.6	2.6					12.5 10.8	49 61	0	W WSW	4		14.5 15.7	44 46	7	ESE	4	
22	Mo	4.6 8.1	16.3	2.0	3.4 2.6					8.9	95	8	NW	4		11.2	87	8	WNW	4	
24	Tu	6.3	18.8	0.8	0.6					12.0	65	0	w	9		18.0	37	4	W	4	
25	We	8.7	17.0	0.0	3.2					13.6	52	1	NW	4		15.5	32	0	SW	4	
26	Th	7.7	15.3	0	4.0					11.6	56	2	SSW	-		14.0	45	5	SVV N	19	
27	Fr	8.2	16.6	0	3.0					10.9	65	6	NW	9		14.0	40	9	IN	18	
28	Sa	4.9	16.4	Ö	2.8					12.0	56	0	NW	4		14.6	47	0	s	4	
29	Su	4.2	18.0	0	3.0					12.6	73	3	WNW	4		16.0	62	1	SE		
30	Mo	7.2	18.7	0	2.0					12.7	81	0	NW	- 4		14.7	71	4	E	4	
31	Tu	6.8	21.2	0						13.0	80	1	NE	4		19.7	48	0	E	4	
	s for Au											.,	- 7-								\vdash
	Mean	6.3	17.0		2.4					11.5	68	2		7		15.5	51	2		5	\Box
	Lowest	3.2	13.0		0.4					7.0	49	0	#	4		11.2	32	0	#	4	
	Highest	11.2	23.1	21.0	4.0					17.8	95	8	#	28		22.2	97	8	N	19	
	Total			44.4	75.8																

Gosford, New South Wales August 2010 Daily Weather Observations



D-4-	D	Ten	•	Rain	Evap	Sun		x wind g		_			ım		****	_	5 11		om .		****
Date	Day	Min 'c	Max 'c	mm	mm	hours	Dim	Spd km/h	Time	Temp 'C	RH %	Cld eighths	Dim	Spd km/h	MSLP	Temp 'c	RH %	Cld eighths	Dim	Spd km/h	MSLP
1	Su	4.8	19.7		mm	nours	WNW	37	19:14	13.0	72	eignuis	NE	2	nra	19.5	45	eignus	NNW	13	nra
2	Mo	3.7	15.3	0.8			WNW	37	22:28	11.1	56		N	11		15.0	43		WNW	13	
3	Tu	9.4	17.6	19.0			WSW	44	02:28	12.3	88		N	9		16.2	59		S	11	
4	We	4.0	18.9	4.4			NNW	22	10:20	13.1	70		N	2		18.4	43		NW	9	
5	Th	2.2	16.8	0.2			SSW	24	11:08	9.4	83		NE	2		15.1	50			Calm	
6	Fr	2.9	16.5	0			w	24	10:11	11.5	54		NW	9		16.0	37		SSE	7	
7	Sa	4.4	16.1	0			NW	24	03:05	11.7	52		ESE	7		15.1	50		SSE	9	
8	Su	2.6	17.0	0			ESE	17	14:34	10.2	82			Calm		16.4	50		ENE	6	
9	Mo	1.8	19.3	0			SE	19	14:54	9.9	90			Calm		18.1	48		ENE	9	
10	Tu	5.9	15.6	4.8			N	20	18:02		99			Calm		15.5	94		N	9	
11	We	8.4	17.5	5.6			N	46	10:48		96			Calm		16.7	44		NNW	15	
12	Th	8.4	18.2	0			WNW	33	12:56	14.6	49		NW	9		16.2	45		NW	11	
13		7.4	18.1	0.6			NNW	28	09:36	13.8	51		WNW	13		16.2	52		SE	11	
14		3.4	20.9	0			N	28	11:48		74		N	11		20.2	34		N	7	
15	Su	5.9	20.0	0.2			NNW	35	12:19		96		ENE	2		19.3	37		NNW	13	
16		8.3	18.3	0.8			N	35	09:27	15.0	52		NNW	11		17.6	36		NW	13	
17	Tu	1.8	17.5	0			SE	20	11:43		51		ENE	2		16.6	27		SW	6	
18 19	We Th	1.4	20.9	0			ENE W	22 48	15:05 12:13	12.8	73 60		NNE	7 7		19.9	49		E NW		
20	Fr	11.0 5.3	24.9 19.4	1.2			N	30	10:34	20.2 15.2	44		NNE	7		24.1 18.9	31 28		WNW	11	
21	Sa	2.1	17.0	0			NW	35	14:10		46		NNE	11		16.3	34		WNW	11	
22	Su	1.9	18.3	0			SE	20	14:29	13.2	52		NE	6		16.1	50		SE	9	
23	Mo	8.1	14.7	2.8			WNW	22	20:53	9.9	96		INE	Calm		12.4	82		N N	4	
24	Tu	5.3	19.8	1.2			NW	28	11:51	14.6	59		NNW	7		18.6	33		NW	7	
25	We	4.5	18.5	0			N	30	14:44	15.3	48		NNE	7		17.7	29		NW	11	
26	Th	3.1	17.5	0			N	50	13:34	14.1	47		NNW	15		16.3	37		NW	15	
27	Fr	7.7	18.5	0			NNW	44	08:53	14.2	51		NNW	20		17.8	39		NW	11	
28	Sa	2.7	16.7	0						13.7	46		NNW	9		15.4	42		SSE	9	
29	Su		18.7				ESE	20	10:46												
30	Мо	6.6	18.7	0			ENE	54	15:20	14.9	71		NNE	6		17.4	58		ESE	7	
31	Tu	6.2	20.8	0			N	24	09:44	15.0	73		NE	6		19.4	55		ENE	11	
Statistic	cs for Au																				
	Mean	5.0	18.3							12.9	66			6		17.3	45			9	
	Lowest	1.4	14.7	40.						9.4	44			Calm		12.4	27			Calm	
	Highest	11.0	24.9	19.0			ENE	54		20.2	99		NNW	20		24.1	94		#	15	
	Total			41.6																	