

### Carbon Based Environmental Pty Limited ABN 74 102 920 285

### **Rocla Quarry Products Calga Quarry**

**Environmental Monitoring** 

**Dust Deposition Gauges, Surface and Ground** Waters and Meteorological Station

January 2013

Colin Davies BSc MEIA CENVP **Environmental Scientist** 

20 March 2013

© Carbon Based Environmental Pty Limited 2013. This document was prepared solely for the original recipient and no third party must rely on or use any information without the consent of Carbon Based Environmental Pty Limited. Carbon Based Environmental Pty Limited and the author accept no responsibility to any third party who uses or relies upon the information contained in this report.

### **Executive Summary**

Carbon Based Environmental is contracted by Rocla Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- Dust Deposition Gauges;
- Surface Waters:
- Groundwaters; and
- Meteorological Station.

This report was prepared by Carbon Based Environmental and includes the following;

- Dust Deposition results for January 2013;
- Surface Water quality results for January 2013;
- Groundwater depth and quality results for January 2013; and
- Meteorological report for January 2013.

The January 2013 dust deposition results for insoluble solids were generally similar when compared to those of December 2012. All sites, on a rolling annual average basis, are currently below the Air Quality Management Plan exceedance level of  $3.7g/m^2$ .month. Results were found to be representative of dust levels as determined by the Australian Standard.

Surface water samples were collected for the normal monthly sampling event on the 1 February 2013 at sites A, B, D and F. Site C was inaccessible and unable to be sampled. At the time of sample collection, there was no water discharge observed from the site. Results show generally good water quality with all sites sampled maintaining steady pH within the slightly acidic range, and low Electrical Conductivity, Total Dissolved Solids and Total Suspended Solids. Oil and Grease was not detected at any site. An additional high rainfall surface water sampling event was undertaken on 28 January 2013 at sites A, D and F.

Groundwaters were sampled for normal monthly monitoring on 1 February 2013. Groundwater depth generally varied across the sampled groundwater bores when compared to last month. Groundwater pH increased and EC levels remained relatively stable.

The meteorological station data recovery for the month was approximately 100%, however the rain gauge became blocked towards the end of the month with recorded rainfall from the 27-29 March significantly lower than those recorded at the Gosford BOM station. Recorded rainfall on site for January was 29.8 mm, which was lower than the Peats Ridge long-term average for January. A comparison is shown below:

Rocla Calga Quarry

BOM Peats Ridge\*

BOM Gosford\*

BOM Peats Ridge Long term mean for January\*

29.8 mm\*\*

Not Available
312.0 mm

117.0 mm

**Note**: Differences in the daily rainfall readings between BOM and the Rocla station may occur due to BOM stations reporting rainfall at 9am and the Rocla station recording rainfall at midnight.

<sup>\*</sup>Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).

<sup>\*\*</sup> Inaccurate rainfall readings during high rainfall event 27-29 January 2013.

### 1.0 Sampling Program

Rocla Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. Carbon Based Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. Carbon Based Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 "Methods for Sampling and Analysis of Ambient Air Method 10.1 Determination of Particulates—Deposited Matter—Gravimetric Method". Sampling is undertaken every 30 + /- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as  $g/m^2$ .month.

Surface waters are sampled in accordance with Australian Standards AS5667.1 "Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples", AS5667.6 "Water Quality Sampling—Guidance on sampling of rivers and streams" and AS5667.4 "Water Quality Sampling—Guidance on sampling from lakes, natural and man-made". Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards AS5667.1 "Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples" and AS5667.11 "Water Quality Sampling—Guidance on sampling of ground waters". Groundwater monitoring sites are sampled at least bi-monthly for water quality and at least quarterly for water level. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real time display. Wind parameters are measured according to Australian Standard AS 2923 "Ambient Air— Guide for Measurement of Horizontal Wind for Air Quality Applications".

The weather stations have the following sensor configuration; Air temperature

- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

Carbon Based Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

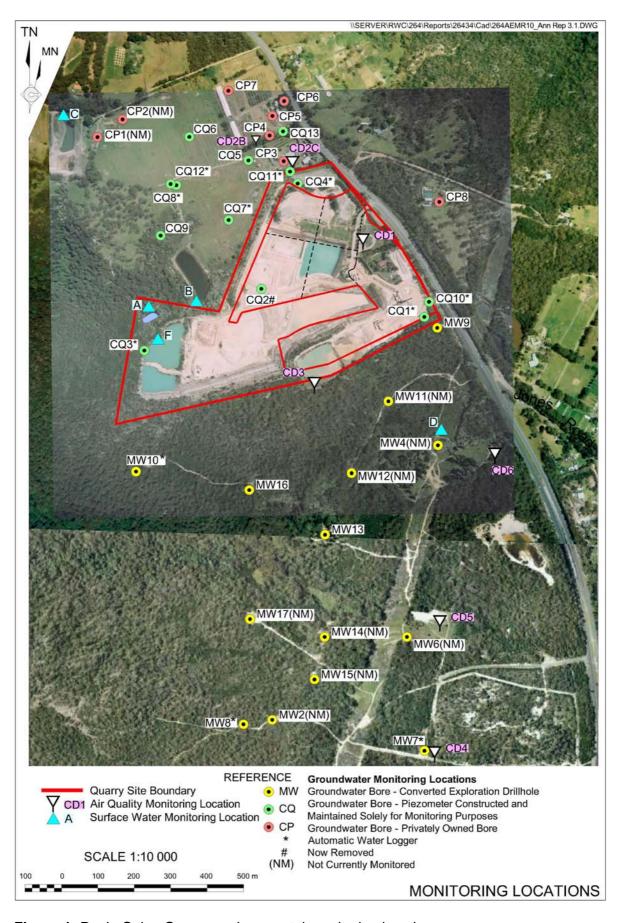


Figure 1: Rocla Calga Quarry environmental monitoring locations

### 2.0 Monthly Results

### 2.1 Dust Deposition Gauges

**Table 1** displays the results for January 2013 and the project 12 month rolling average. Results are in g/m<sup>2</sup>.month.

Table 1: Dust Deposition results: 2 January 2013 – 1 February 2013 (30 days)

Site	Monthly Insoluble Solids g/m².month	Monthly Ash Residue g/m².month	Monthly Combustible Matter g/m².month	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids g/m².month
CD1	1.5	1.0	0.5	67	1.7
CD2c	0.9	0.6	0.3	67	1.2
CD3	1.1	0.8	0.3	73	1.3
CD4	0.6	0.3	0.3	50	0.6
CD5	0.4	0.3	0.1	75	0.4
CD6	0.5	0.4	0.1	80	0.5


Insoluble Solids marked with an \* indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m².month; the Development Consent's annual average amenity criteria at residential locations. The current rolling annual average is calculated from February 2012 to January 2013.

NA= Not Available.

CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The laboratory analysis is provided in **Appendix 1**.

**Figure 2: Dust Deposition Charts** 

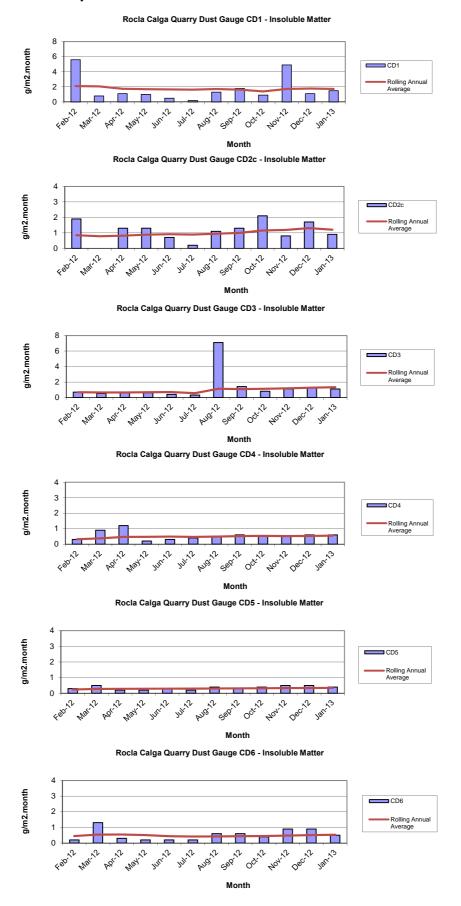

### 2.2 Surface Water Monitoring

Monthly surface water monitoring was conducted on the 1 February 2013 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

Table 2: Monthly surface water monitoring - January grab sample results

Site	Observed Flow Rate	Water Colour	Turbidity	рН	EC (μS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
Α	Dam	Clear	Clear	6.26	64	47	9	<5
В	Dam	Clear	Clear	6.76	82	84	109	<5
С				No Acc	ess			
D	Slow	Clear	Clear	5.51	117	98	<5	<5
F	Dam	Clear	Clear	5.93	62	70	<5	<5

At the time of sampling, there were no water discharges off site from any sampling location observed. Samples were collected at sites A, B, D and F. Site C was inaccessible and unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic to neutral range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any site.

An additional high rainfall surface water sampling event was undertaken on 28 January 2013 at sites A, D and F. Results are provided in **Appendix 1**.

### 2.3 Groundwater Monitoring

Groundwaters were sampled on 1 February 2013. Water quality tests for pH and electrical conductivity were conducted by Carbon Based Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and Electrical Conductivity (+/- 5%) was obtained between samples. Data is displayed in **Table 3** and **Figures 3 to 6**.

Groundwater depth generally varied across the sampled groundwater bores when compared to last month. A substantial decrease in water depth was recorded at CQ1 indicating water moving towards the surface.

pH levels generally increased when compared to last month. pH at all sites is in the acidic range except for CQ1 which was in the alkaline range. EC levels remained low and relatively stable compared to the results obtained in December 2012.

**Table 3: Groundwater Quality Data** 

Reference	Bore	Туре	Depth to water TOC (m) April 06	Depth to water TOC (m) This report	pH This report	Electrical Conductivity (µS/cm) This report
CQ1	Voutos	* Monitor	20.59	0.67	10.2	218
CQ3	Voutos	* Monitor	10.53	10.24	6.4	129
CQ4	Voutos	* Monitor	8.78	10.89	5.2	105
CQ5	Gazzana	DIP Only	8.69	8.08	4.6	204
CQ6	Gazzana	DIP Only	16.00	11.11	4.8	237
CQ7	Gazzana	* Monitor	6.89	6.80	5.0	114
CQ8	Gazzana	* Monitor	11.03	6.24	4.8	168
CQ9	Gazzana	DIP Only	10.10	8.89	5.0	124
CQ10	Voutos	* Monitor	NI	22.40	5.2	192
CQ11S	Gazzana	* Monitor	NI	11.16	4.9	183
CQ11D	Gazzana	* Monitor	NI	12.30	5.1	174
CQ12	Gazzana	* Monitor	NI	5.18	4.8	133
CQ13	Kashouli	* Monitor	NI	14.31	5.1	243
CP3	Gazzana	Domestic	10.40	9.97	5.1	169
CP4	Kashouli	Domestic	13.63	11.43	5.2	228
CP5	Kashouli	Domestic	16.61	9.17	5.1	268
CP6	Kashouli	Domestic	16.27	11.09	4.9	224
CP7	Kashouli	Production	8.56	2.44	5.5	181
CP8	Rozmanec	Domestic	22.17	NR	NR	NR
MW7	Rocla Bore	* Monitor	15.76	16.73	4.9	128
MW8	Rocla Bore	* Monitor	9.82	8.20	5.2	103
MW9	Rocla Bore	* Monitor	22.44	21.86	5.0	103
MW10	Rocla Bore	* Monitor	15.41	12.96	4.7	146
MW13	Rocla Bore	DIP Only	NI	8.10	5.1	117
MW16	Rocla Bore	DIP Only	NI	8.71	5.0	129

### Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to access restrictions.

NR = Not Required by resident.

NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.


Shading is used to indicate the following trends in water depth (compared to the last reading):


Increase to ground water depth (water moved away from surface)
Decrease to ground water depth (water moved towards surface)
Stable water depth (+/- 0.01m)

Available groundwater loggers were downloaded and will be forwarded to the Rocla Calga Quarry groundwater consultant.


<sup>\* =</sup> Logger Installed.

Figures 3 to 6: Groundwater Depth Charts.




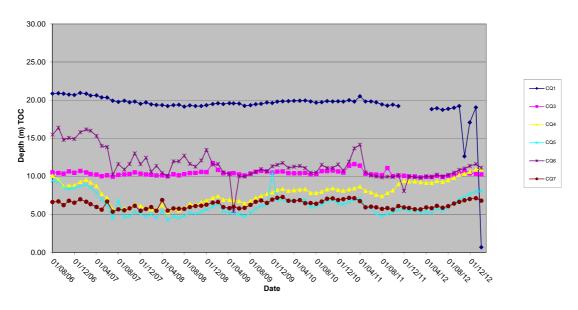


### Rocla Calga Groundwaters - Quarry Bores CQ10 to CQ13 Water depth TOC

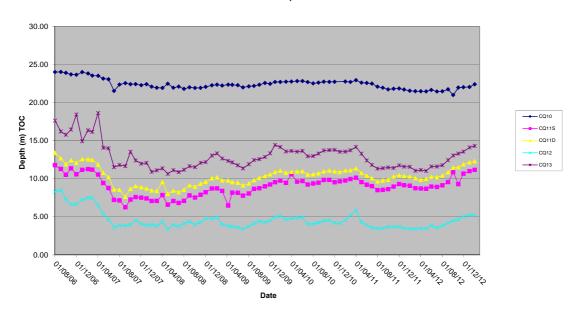

### Rocla Calga Groundwaters - Quarry Bores CP3 to CP8 Water Depth TOC

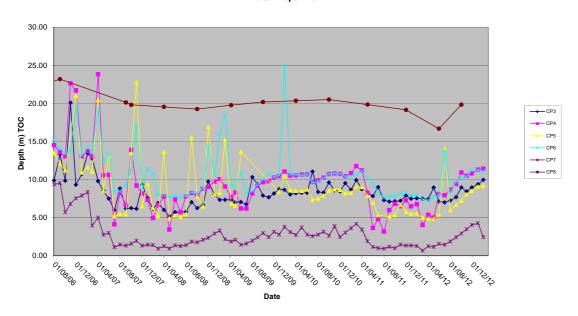

Rocla Calga Groundwaters - Quarry Bores MW7 to MW16 Water Depth TOC

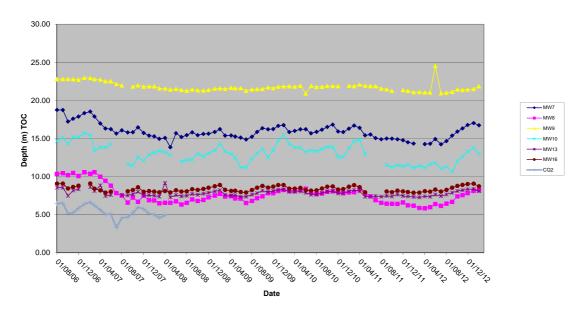

### 2.4 Meteorological Monitoring

The Rocla Calga Quarry weather station data recovery in January was approximately 100%. The weather station data follows and includes:

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

Monthly weather statistics from the nearby Bureau of Meteorology (BOM) Gosford station is included in **Appendix 2** for comparison purposes. Data from the Peats Ridge BOM station for January 2013 was unavailable.

Data for January 2013 shows that rainfall recorded at the Rocla Calga Quarry was significantly lower than the Gosford BOM station recorded rainfall. This is due to the rain gauge on the Rocla Calga station becoming blocked towards the end of the month meaning only a small proportion of the actual rainfall was captured during a high rainfall event between the 27-29 March. The blockage was cleared on the 29 March. Recorded rainfall at Rocla Calga Quarry was lower than the Peats Ridge long term mean rainfall for January. The rainfall comparison is provided below:

Rocla Calga Quarry

BOM Peats Ridge\*

BOM Gosford\*

BOM Peats Ridge Long term mean for January\*

29.8 mm\*\*

Not Available
312.0 mm

117.0 mm

Results are displayed in the following table and figures.


<sup>\*</sup>Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).


### 2.4.1 Monthly Meteorological Data Summary

Summary	Jan-13	Rocla - Calga
---------	--------	---------------


100   100					_																		
201/2013   16.2   20.0   24.3   64   81   92   0.0   3.1   0.4   3.0   11.6   16.3   24.7   1006.3   1012.6   1017.9   0   138.4   1236   99.7   100.0   301/2013   16.1   22.8   31.6   38   71   39   0.0   6.6   0   2.2   9.4   16.2   32.8   1011.6   1013.7   1016.0   0   346.4   1033   99.7   100.0		- 1			Min %RH	Av %RH	Max %RH	RAIN mm	ET mm	Min WS	AvWS	Max WS		Max Heat index				Min Solar Rad	Av Solar Rad	Max Solar Rad	Min Data %	Av data %	Max Data %
16.9   20.8   27.2   52   72   86   0.0   4.0   0   1.6   7.6   16.9   27.2   10144   1016.3   1018.0   0   203.3   904   100   100.0   100.0   101.0   100.0   101.0   101.0   100.0   101.0   101.0   100.0   101.0   101.0   101.0   100.0   101.	1/01/2013	20.7	27.3	37.6	21	60	93	0.0	7.4	0	2.5	13.9	20.8	41.4	1005.4	1007.7	1010.7	0	329.7	1079	99.7	100.0	100
401/2013	2/01/2013	16.2	20.0	24.3	64	81	92	0.0	3.1	0.4	3.0	11.6	16.3	24.7	1006.3	1012.6	1017.9	0	138.4	1236	99.7	100.0	100
Solition	3/01/2013	16.9	20.8	27.2	52	72	86	0.0	4.0	0	1.6	7.6	16.9	27.2	1014.4	1016.3	1018.0	0	203.3	904	100	100.0	100
601/2018   18.0   23.9   32.0   41   73   86   0.0   6.2   0   16.8   8   18.0   32.9   1015.3   1018.3   1021.4   0   32.0   1028   99.7   100.0	4/01/2013	16.1	22.8	31.6	38	71	93	0.0	6.6	0	2.2	9.4	16.2	32.8	1011.6	1013.7	1016.0	0	346.4	1033	99.7	100.0	100
701/2013	5/01/2013	16.9	25.0	36.8	36	70	95	0.0	6.9	0	1.9	8	16.9	39.4	1012.0	1013.4	1015.5	0	350.6	1044	93.9	99.9	100
801/2013 20.1 31.2 41.3 15 41 83 0.0 10.2 0.4 5.1 14.3 20.1 40.3 992.7 1001.8 1012.1 0 304.0 1051 99.4 100.0 1001/2013 18.6 22.5 31.9 24 60 79 0.0 5.2 0.4 4.3 15.2 18.6 30.2 990.8 998.5 1006.4 0 142.8 857 99.4 100.0 1101/2013 18.8 20.8 24.5 61 71 85 0.0 2.3 0 1.9 10.3 18.6 24.8 1005.7 1008.2 1010.3 0 95.6 474 98.5 100.0 1101/2013 18.8 20.8 24.5 61 71 85 0.0 2.3 0 1.9 10.3 18.6 24.8 1005.7 1008.2 1010.3 0 95.6 474 98.5 100.0 1101/2013 18.8 20.8 24.5 61 71 85 0.0 2.3 0 1.9 10.3 18.8 41.5 1002.7 1006.5 1010.2 0 32.0 1032 99.4 100.0 1101/2013 18.8 26.7 37.6 37.6 37.6 58 84 0.0 5.8 0 34.1 11.2 20.2 44.8 1002.7 1005.7 1011.7 0 184.0 982 99.9 130/12013 18.1 20.6 25.1 71 86 96 8.8 16.0 1.9 10.3 18.1 20.1 100.5 100.9 1011.7 0 184.0 982 99.9 130/12013 15.5 18.1 21.7 54 78 96 4.0 4.6 0.4 3.3 12.5 15.5 20.8 1009.6 1015.1 1020.2 0 263.7 1113 98.4 150/12013 15.5 18.1 21.7 54 78 96 4.0 4.6 0.4 5.3 12.5 15.5 20.8 1009.6 1015.1 1020.2 0 263.7 1113 98.4 150/12013 15.7 23.2 32.6 44 71 95 0.0 5.9 0 1.7 8.5 15.7 34.7 1009.4 1012.0 1014.5 0 307.5 1027 99.1 100.0 170.1 100.1	6/01/2013	18.0	23.9	32.0	41	73	96	0.0	6.2	0	1.6	8	18.0	32.9	1015.3	1018.3	1021.4	0	320.9	1028	99.7	100.0	100
901/2013 18.6 22.5 31.9 24 60 79 0.0 5.2 0.4 4.3 15.2 18.6 30.2 990.8 998.5 1006.4 0 142.8 857 99.4 100.0 1001/2013 18.6 20.8 24.5 61 71 85 0.0 2.3 0 1.9 10.3 18.6 24.8 1005.7 1008.2 1010.3 0 95.6 474 98.5 100.0 110/1/2013 18.8 26.7 37.6 37 65 87 0.0 6.9 0 1.9 9.8 18.8 141.5 1002.7 1006.5 1010.2 0 32.2 102.9 99.4 100.0 120/1/2013 20.2 28.2 43.0 12 58 84 0.0 5.8 0 3.4 11.2 20.2 44.8 1002.3 1005.7 1011.7 0 184.0 982 94.2 99.9 130/1/2013 18.1 20.6 25.1 71 86 96 8.8 11.6 0 1.9 10.3 18.1 26.1 1005.5 1009.2 1012.1 0 77.5 405 81.3 98.4 140/1/2013 15.5 18.1 21.7 54 78 96 4.0 4.6 0.4 3.3 12.5 15.5 20.8 1009.6 1015.1 1020.2 0 283.7 1113 78.7 96.6 150/1/2013 15.7 23.2 32.6 44 71 95 0.0 5.9 0 1.7 8.5 15.7 34.7 1009.4 1012.0 104.5 100.5 1012.5 0 307.5 1027 93.6 99.9 170/1/2013 19.8 24.9 32.6 54 4 71 95 0.0 5.9 0 1.7 8.5 15.7 34.7 1009.4 1012.5 102.5 102.5 102.7 93.6 99.9 180/1/2013 17.3 20.1 28.8 24.5 15.5 6 93 0.4 8.3 0 3.7 15.6 21.2 44.9 996.0 1001.3 1008.5 1012.5 0 290.7 993 94.2 99.9 190/1/2013 17.3 20.1 23.0 61 80 95 6.4 2.0 0 2.1 9.8 17.3 23.3 1006.6 1011.4 1015.6 0 77.9 460 91.8 99.9 190/1/2013 17.4 18.6 20.6 86 95 97 3.8 0.9 0.4 16.7 2.7 17.5 21.5 21.5 1013.9 1015.5 1012.5 0 290.7 993 94.2 99.9 190/1/2013 17.4 25.0 23.6 44.5 15 88 39 97 0.4 3.0 0.1 2.8 81.8 2.8 17.3 23.3 1006.6 1011.4 1015.6 0 77.9 460 91.8 99.9 190/1/2013 18.4 22.3 28.4 58 83 97 0.4 3.0 0.1 2.8 81.8 18.8 29.8 1010.4 1013.0 1015.0 0 164.8 694 93.3 99.9 190/1/2013 18.4 22.5 24.4 9.4 49.9 96.0 1001.3 1006.7 0 285.3 90.9 93.3 99.9 190/1/2013 18.4 22.5 24.4 9.4 40 81 97 0.2 3.6 0.1 5.7 8.9 18.8 36.4 100.4 1013.0 1015.0 0 164.8 694 93.3 99.9 190/1/2013 18.4 22.5 28.4 59.8 39 97 0.4 3.0 0 1.2 8 81.8 18.8 29.8 1010.4 1013.0 1015.0 0 164.8 694 93.3 99.9 190/1/2013 18.4 22.5 28.4 59.8 39 97 0.4 3.0 0 1.5 7.6 18.5 37.9 100.8 1012.7 1016.5 0 2.22.0 1133 39.9 99.9 190/1/2013 18.4 22.6 29.3 59.8 29.4 0.0 4.2 0 1.9 8.5 18.8 18.8 29.8 1010.4 1013.0 1015.0 0 164.8 694 93.3 99.9 120/1/2013 18.4 22.6 29.3 59.8 29.4 0.0 4.2 0 1.9 8.5 18.8 18.8 29.8 1010.4 1013.0 1015.	7/01/2013	20.4	24.2	30.5	53	75	93	0.0	4.9	0.4	1.9	8.5	20.5	32.8	1012.2	1018.0	1021.4	0	254.7	979	93.6	99.9	100
1001/2013 18.6 20.8 24.5 61 71 85 0.0 2.3 0 1.9 10.3 18.6 24.8 1005.7 1008.2 1010.3 0 95.6 474 98.5 100.0 11/01/2013 18.8 26.7 37.6 37 65 87 0.0 6.9 0 1.9 9.8 18.8 41.5 1002.7 1006.5 1010.2 0 322.0 1032 99.4 100.0 12/01/2013 20.2 28.2 43.0 12 58 84 0.0 5.8 0 3.4 11.2 20.2 44.8 1002.3 1005.7 1011.7 0 184.0 98.2 94.2 99.9 13/01/2013 18.1 20.6 25.1 71 86 96 8.8 1.6 0 1.9 10.3 18.1 26.1 1005.5 1008.2 1012.1 0 77.5 405 81.3 98.4 14/01/2013 15.5 18.1 21.7 54 78 96 4.0 4.6 0.4 3.3 12.5 15.5 20.8 1006.6 1015.1 1002.2 0 263.7 1113 78.7 96.6 15/01/2013 15.0 20.1 26.8 51 73 91 0.0 4.0 0 1.8 9.4 15.0 26.8 1013.9 1016.9 1020.1 0 197.5 1012 99.1 100.0 15/01/2013 15.7 23.2 32.6 44 71 95 0.0 5.9 0 1.7 8.5 15.7 34.7 1008.4 1012.0 1014.5 0 307.5 1027 93.6 99.9 17/01/2013 19.8 24.9 32.6 52 77 95 0.0 5.6 0 1.7 8.9 19.8 36.4 1004.5 1008.5 1012.5 0 290.7 993 94.2 99.9 18/01/2013 17.3 20.1 23.0 61 80 95 6.4 2.0 0 2.1 9.8 17.5 6 21.2 44.9 99.0 1001.3 1006.7 0 285.3 980.9 93.3 99.9 19/01/2013 17.4 18.6 20.6 86 95 97 3.8 0.9 0.4 1.6 7.2 17.5 21.5 1013.9 1016.6 1006.7 0 285.3 980.9 93.3 99.9 19/01/2013 17.4 18.6 20.6 86 95 97 3.8 0.9 0.4 1.6 7.2 17.5 21.5 1013.9 1015.5 0 290.7 99.3 99.9 19/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.5 18.5 27.5 101.4 1013.0 1015.0 0 164.8 694 93.3 99.8 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1005.7 1011.2 0 194.2 1029 92.1 99.9 22/01/2013 18	8/01/2013	20.1	31.2	41.3	15	41	83	0.0	10.2	0.4	5.1	14.3	20.1	40.3	992.7	1001.8	1012.1	0	304.0	1051	99.4	100.0	100
11/01/2013	9/01/2013	18.6	22.5	31.9	24	60	79	0.0	5.2	0.4	4.3	15.2	18.6	30.2	990.8	998.5	1006.4	0	142.8	857	99.4	100.0	100
12/01/2013	10/01/2013	18.6	20.8	24.5	61	71	85	0.0	2.3	0	1.9	10.3	18.6	24.8	1005.7	1008.2	1010.3	0	95.6	474	98.5	100.0	100
13/01/2013	11/01/2013	18.8	26.7	37.6	37	65	87	0.0	6.9	0	1.9	9.8	18.8	41.5	1002.7	1006.5	1010.2	0	322.0	1032	99.4	100.0	100
14/01/2013 15.5 18.1 21.7 54 78 96 4.0 4.6 0.4 3.3 12.5 15.5 20.8 1009.6 1015.1 1020.2 0 263.7 1113 78.7 96.6 15/01/2013 15.0 20.1 26.8 51 73 91 0.0 4.0 0 1.8 9.4 15.0 26.8 1013.9 1016.9 1020.1 0 197.5 1012 99.1 100.0 15/01/2013 15.7 23.2 32.6 44 71 95 0.0 5.9 0 1.7 8.5 15.7 34.7 1009.4 1012.0 1014.5 0 307.5 1027 93.6 99.9 17/01/2013 18.8 24.9 32.6 52 77 95 0.0 5.6 0 1.7 8.9 19.8 36.4 1004.5 1006.5 1012.5 0 290.7 993 94.2 99.9 18/01/2013 21.1 30.5 44.5 15 56 93 0.4 8.3 0 3.7 15.6 21.2 44.9 96.0 1001.3 1006.5 1012.5 0 290.7 993 94.2 99.9 19/01/2013 17.3 20.1 23.0 61 80 95 6.4 2.0 0 2.1 9.8 17.3 23.3 1006.6 1011.4 1015.6 0 77.9 460 91.8 99.9 20/01/2013 17.4 18.6 20.6 86 95 97 3.8 0.9 0.4 1.6 7.2 17.5 21.5 1013.9 1015.2 1016.5 0 60.2 323 73.4 96.5 21/01/2013 18.8 22.3 28.4 58 83 97 0.4 3.0 0 1.2 8 18.8 29.9 100.4 1013.0 1015.0 0 61.4 6694 93.3 99.8 22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1008.7 1011.2 0 194.2 1029 92.1 99.9 23/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1008.7 1011.2 0 194.2 1029 92.1 99.9 23/01/2013 18.4 23.6 29.3 59 82 94 0.0 4.2 0 1.9 8.5 18.4 31.4 1012.3 1014.9 1016.7 0 78.3 318 91.8 99.9 25/01/2013 18.2 22.6 29.3 59 82 94 0.0 4.2 0 1.9 8.5 18.4 31.4 1012.3 1014.9 1016.7 0 78.3 318 91.8 99.9 25/01/2013 19.2 24.7 32.8 52 80 97 0.0 5.0 0 1.8 9.8 19.2 36.5 1008.2 1010.6 1013.2 0 250.7 1074 96.2 99.9 25/01/2013 19.2 24.7 32.8 52 80 97 0.0 5.0 0 1.8 9.8 19.2 36.5 1008.2 1010.6 1013.2 0 250.7 1074 96.2 99.9 25/01/2013 19.3 21.1 23.5 86 94 97 0.2 0.9 0 1.5 9.4 19.3 24.9 1006.6 1007.8 1009.1 10.5 50.5 252 100 100.0 27/01/2013 18.0 21.4 26.6 65 85 99.0 0.2 1.9 1.1 12.1 18.6 28.5 99.1 1000.0 1014.5 0 148.8 725 86.3 99.9 99.7 1000.0 1	12/01/2013	20.2	28.2	43.0	12	58	84	0.0	5.8	0	3.4	11.2	20.2	44.8	1002.3	1005.7	1011.7	0	184.0	982	94.2	99.9	100
15/01/2013	13/01/2013	18.1	20.6	25.1	71	86	96	8.8	1.6	0	1.9	10.3	18.1	26.1	1005.5	1009.2	1012.1	0	77.5	405	81.3	98.4	100
16/01/2013	14/01/2013	15.5	18.1	21.7	54	78	96	4.0	4.6	0.4	3.3	12.5	15.5	20.8	1009.6	1015.1	1020.2	0	263.7	1113	78.7	96.6	100
17/01/2013	15/01/2013	15.0	20.1	26.8	51	73	91	0.0	4.0	0	1.8	9.4	15.0	26.8	1013.9	1016.9	1020.1	0	197.5	1012	99.1	100.0	100
18/01/2013	16/01/2013	15.7	23.2	32.6	44	71	95	0.0	5.9	0	1.7	8.5	15.7	34.7	1009.4	1012.0	1014.5	0	307.5	1027	93.6	99.9	100
19/01/2013	17/01/2013	19.8	24.9	32.6	52	77	95	0.0	5.6	0	1.7	8.9	19.8	36.4	1004.5	1008.5	1012.5	0	290.7	993	94.2	99.9	100
20/01/2013	18/01/2013	21.1	30.5	44.5	15	56	93	0.4	8.3	0	3.7	15.6	21.2	44.9	996.0	1001.3	1006.7	0	285.3	980	93.3	99.9	100
21/01/2013 18.8 22.3 28.4 58 83 97 0.4 3.0 0 1.2 8 18.8 29.8 1010.4 1013.0 1015.0 0 164.8 694 93.3 99.8 20/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1008.7 1011.2 0 194.2 1029 92.1 99.9 24/01/2013 18.4 22.6 29.3 59 82 94 0.0 4.2 0 1.9 8.5 18.4 31.4 1012.3 1014.9 1016.7 0 78.3 318 91.8 99.9 25/01/2013 19.2 24.7 32.8 52 80 97 0.0 5.0 0 1.8 9.8 19.2 36.5 1008.2 1010.6 1013.2 0 259.7 1074 96.2 99.9 26/01/2013 19.2 24.7 32.8 52 80 97 0.0 4.5 0 2.8 5.8 21.7 30.9 1007.5 1009.3 1011.0 0 212.0 925 100 100.0 27/01/2013 19.3 21.1 23.5 86 94 97 0.2 0.9 0 1.5 9.4 19.3 24.9 106.6 1007.8 1009.3 1011.0 0 212.0 925 100 100.0 28/01/2013 19.1 20.4 21.1 95 97 98 0.2 0.4 0.4 3.3 14.8 18.9 22.6 1002.9 1006.6 1008.4 0 21.6 81 97.4 99.9 29/01/2013 18.6 21.5 26.7 73 91 98 52 2.9 0 1.9 11.2 18.6 28.5 99.1 1003.0 1009.6 0 178.1 1038 85.7 98.8 30/01/2013 18.0 21.4 26.6 65 85 95 0.0 2.5 0 1.3 7.2 18.1 27.7 1010.0 1002.7 1014.5 0 148.8 725 86.3 99.1 1/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	19/01/2013	17.3	20.1	23.0	61	80	95	6.4	2.0	0	2.1	9.8	17.3	23.3	1006.6	1011.4	1015.6	0	77.9	460	91.8	99.9	100
22/01/2013 18.4 23.6 34.9 40 81 97 0.2 3.6 0 1.5 7.6 18.5 37.9 1005.8 1008.7 1011.2 0 194.2 1029 92.1 99.9 23/01/2013 19.6 20.8 22.4 77 84 92 0.2 1.9 1.3 2.6 9.4 19.6 23.2 1009.9 1013.7 1016.7 0 78.3 318 91.8 99.9 24/01/2013 18.4 22.6 29.3 59 82 94 0.0 4.2 0 1.9 8.5 18.4 31.4 1012.3 1014.9 1016.7 0 222.0 1133 93 99.9 25/01/2013 19.2 24.7 32.8 52 80 97 0.0 5.0 0 1.8 9.8 19.2 36.5 1008.2 1010.6 1013.2 0 259.7 1074 96.2 99.9 26/01/2013 21.7 25.4 31.1 59 79 94 0.0 4.5 0 2.8 5.8 21.7 30.9 1007.5 1008.3 1011.0 0 212.0 92.5 100 100.0 27/01/2013 19.3 21.1 23.5 86 94 97 0.2 0.9 0 1.5 9.4 19.3 24.9 1006.6 1007.8 1009.1 0 50.5 252 100 100.0 27/01/2013 19.1 20.4 21.1 95 97 98 0.2 0.4 0.4 0.4 3.3 14.8 18.9 22.6 1002.9 1006.6 1008.4 0 21.6 81 97.4 99.9 29/01/2013 18.6 21.5 26.7 73 91 98 5.2 2.9 0 1.9 11.2 18.6 28.5 99.1 1003.0 1009.6 0 178.1 1038 85.7 98.8 30/01/2013 18.0 21.4 26.6 65 85 95 0.0 2.5 0 1.3 7.2 18.1 27.7 1010.0 1012.7 1014.5 0 148.8 725 86.3 99.1 31/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	20/01/2013	17.4	18.6	20.6	86	95	97	3.8	0.9	0.4	1.6	7.2	17.5	21.5	1013.9	1015.2	1016.5	0	60.2	323	73.4	96.5	100
23/01/2013	21/01/2013	18.8	22.3	28.4	58	83	97	0.4	3.0	0	1.2	8	18.8	29.8	1010.4	1013.0	1015.0	0	164.8	694	93.3	99.8	100
24/01/2013	22/01/2013	18.4	23.6	34.9	40	81	97	0.2	3.6	0	1.5	7.6	18.5	37.9	1005.8	1008.7	1011.2	0	194.2	1029	92.1	99.9	100
25/01/2013	23/01/2013	19.6	20.8	22.4	77	84	92	0.2	1.9	1.3	2.6	9.4	19.6	23.2	1009.9	1013.7	1016.7	0	78.3	318	91.8	99.9	100
26/01/2013 21.7 25.4 31.1 59 79 94 0.0 4.5 0 2.8 5.8 21.7 30.9 1007.5 1009.3 1011.0 0 212.0 925 100 100.0 27/01/2013 19.3 21.1 23.5 86 94 97 0.2 0.9 0 1.5 9.4 19.3 24.9 1006.6 1007.8 1009.1 0 50.5 252 100 100.0 27/01/2013 19.1 20.4 21.1 95 97 98 0.2 0.4 0.4 3.3 14.8 18.9 22.6 1002.9 1006.6 1008.4 0 21.6 81 97.4 99.9 29/01/2013 18.6 21.5 26.7 73 91 98 5.2 2.9 0 1.9 11.2 18.6 28.5 999.1 1003.0 1009.6 0 178.1 1038 85.7 98.8 30/01/2013 18.0 21.4 26.6 65 85 95 0.0 2.5 0 1.3 7.2 18.1 27.7 1010.0 1012.7 1014.5 0 148.8 725 86.3 99.1 31/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	24/01/2013	18.4	22.6	29.3	59	82	94	0.0	4.2	0	1.9	8.5	18.4	31.4	1012.3	1014.9	1016.7	0	222.0	1133	93	99.9	100
27/01/2013	25/01/2013	19.2	24.7	32.8	52	80	97	0.0	5.0	0	1.8	9.8	19.2	36.5	1008.2	1010.6	1013.2	0	259.7	1074	96.2	99.9	100
28/01/2013	26/01/2013	21.7	25.4	31.1	59	79	94	0.0	4.5	0	2.8	5.8	21.7	30.9	1007.5	1009.3	1011.0	0	212.0	925	100	100.0	100
29/01/2013 18.6 21.5 26.7 73 91 98 5.2 2.9 0 1.9 11.2 18.6 28.5 999.1 1003.0 1009.6 0 178.1 1038 85.7 98.8 30/01/2013 18.0 21.4 26.6 65 85 95 0.0 2.5 0 1.3 7.2 18.1 27.7 1010.0 1012.7 1014.5 0 148.8 725 86.3 99.1 31/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	27/01/2013	19.3	21.1	23.5	86	94	97	0.2	0.9	0	1.5	9.4	19.3	24.9	1006.6	1007.8	1009.1	0	50.5	252	100	100.0	100
30/01/2013 18.0 21.4 26.6 65 85 95 0.0 2.5 0 1.3 7.2 18.1 27.7 1010.0 1012.7 1014.5 0 148.8 725 86.3 99.1 31/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	28/01/2013	19.1	20.4	21.1	95	97	98	0.2	0.4	0.4	3.3	14.8	18.9	22.6	1002.9	1006.6	1008.4	0	21.6	81	97.4	99.9	100
31/01/2013 19.0 24.7 33.6 48 80 97 0.0 5.1 0 2.1 9.4 19.0 39.0 1004.0 1009.3 1014.0 0 275.9 1083 90.9 99.7	29/01/2013	18.6	21.5	26.7	73	91	98	5.2	2.9	0	1.9	11.2	18.6	28.5	999.1	1003.0	1009.6	0	178.1	1038	85.7	98.8	100
	30/01/2013	18.0	21.4	26.6	65	85	95	0.0	2.5	0	1.3	7.2	18.1	27.7	1010.0	1012.7	1014.5	0	148.8	725	86.3	99.1	100
	31/01/2013	19.0	24.7	33.6	48	80	97	0.0	5.1	0	2.1	9.4	19.0	39.0	1004.0	1009.3	1014.0	0	275.9	1083	90.9	99.7	100
Monthly   15 23.2 44.5   12 76 98   29.8   136.4   0 2.3 15.6   15.0 44.9   990.8 1010.3 1021.4   0 205.1 1236   73.4 99.6	Monthly	15	23.2	44.5	12	76	98	29.8	136.4	0	23	15.6	15.0	44 9	990.8	1010.3	1021 4	0	205 1	1236	73.4	99.6	100

### 2.4.2 Monthly Weather Charts




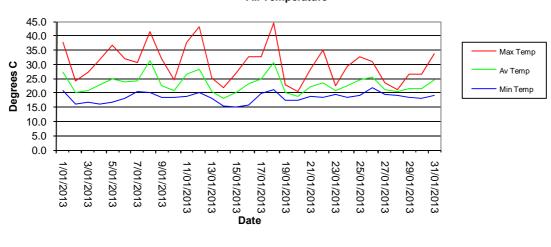


### Rocla Calga Quarry - January 2013 Humidity

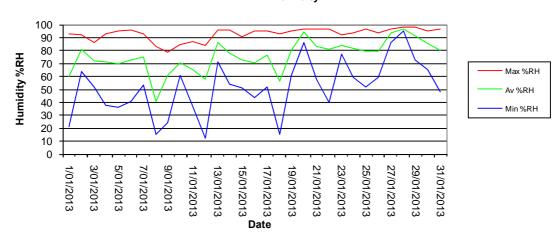


### Rocla Calga Quarry - January 2013 Heat Index/Wind Chill

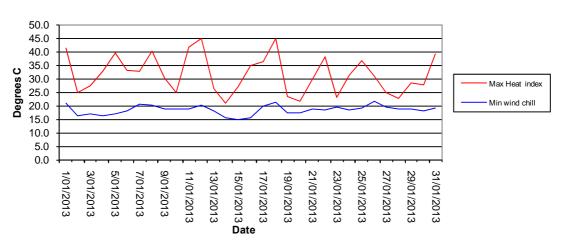


### Rocla Calga Quarry - January 2013 Wind Speed

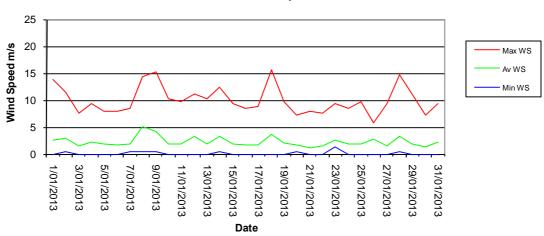


### Rocla Calga Quarry - January 2013 Solar Radiation

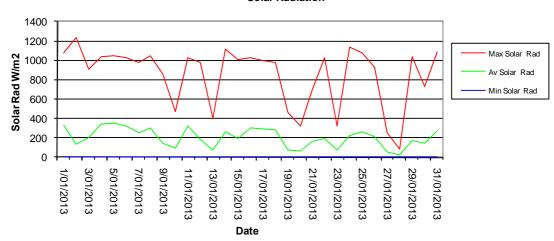


### Rocla Calga Quarry -January 2013 Atmospheric Pressure

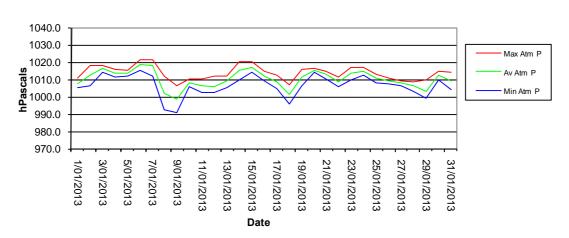


### Rocla Calga Quarry - January 2013 Rainfall

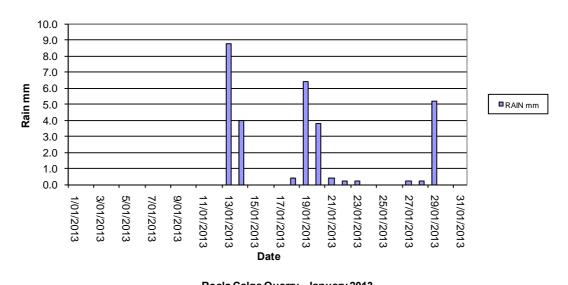

### Rocla Calga Quarry - January 2013 Evapotranspiration

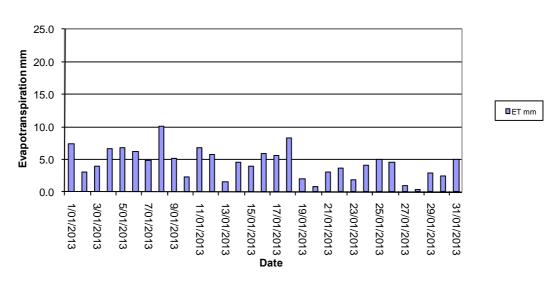


### Rocla Calga Quarry - January 2013 Data Reception

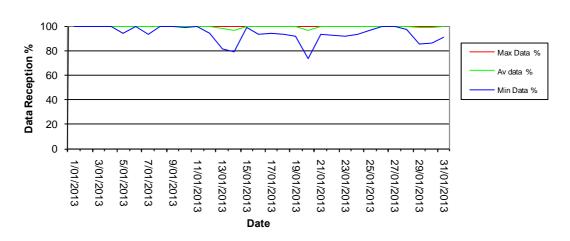

### 2.4.3 Monthly Windrose Plot

Frequency plot of the average wind speed and average direction over each 15 minute sampling period. Wind is considered to be calm when less than a 15 minute average of 1m/s.

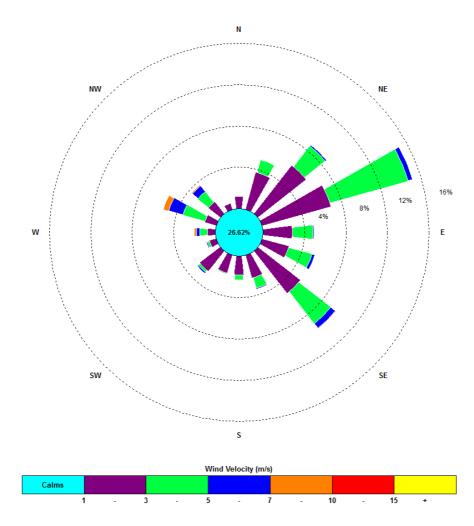

00:15, 01 January 2012 - 23:45, 31 January 2012

The predominant winds were from the ENE, with strongest winds from the WNW. The maximum wind speed was 15.6 m/s from the SSW.

### Appendix 1 Laboratory Certificates





## **Environmental Division**

	CERTIFICATE	RTIFICATE OF ANALYSIS	
Work Order	: EN1300416	Page	:10f4
	: CARBON BASED ENVIRONMENTAL : MR COLIN DAVIES : 47 BOOMERANG ST CESSNOCK NSW, AUSTRALIA 2325	Laboratory Contact Address	: Environmental Division Newcastle : Peter Keyte : 5 Rosegum Road Warabrook NSW Australia 2304
E-mail Telephone Facsimile Project Order number	: cbased@bigpond.com : +61 49904443 : +61 02 49904442 : Rocla Calgo Dusts	E-mail Telephone Facsimile QC Level	: peter.keyte@als.com.au : 61-2-4968-9433 : +61-2-4968 0349 : NEPM 1999 Schedule B(3) and ALS QCS3 requirement
C-O-C number Sampler Site		Date Samples Received Issue Date	: 01-FEB-2013 : 13-FEB-2013
Quote number	:	No. of samples received No. of samples analysed	9
port supersedes	This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for	sample(s) as submitted.	All pages of this report have been checked and app

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



ISO/IEC 17025.

NATA Accredited Laboratory 825 Accredited for compliance with

Signatories
This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11. Position Signatories

Laboratory Coordinator (2IC) Dianne Blane

Accreditation Category

Newcastle

WORLD RECOGNISED
ACCREDITATION

didress 5 Rosegum Road Warabrook NSW Australia 2304 | PHONE +61-2-4968 9433 | Facsimile +61-2-4968 0349 Environmental Division Newcastle ARN 84 009 936 029 Part of the ALS Group An ALS Limited Company



Page : 2 of 4

Work Order : EN1300416

Client : CARBON BASED ENVIRONMENTAL

Project : Rocla Calgo Dusts

### General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

Key:

This result is computed from individual analyte detections at or above the level of reporting

 Analysis as per AS3580.10.1-2003. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m².mth as sampling data was provided by the client.



Analytical Results

Project Client

: 3 of 4 : EN1300416 : CARBON BASED ENVIRONMENTAL : Rocla Calgo Dusts

Page Work Order

Sub-Matrix: DUST (Matrix: AIR)		C	Client sample ID	CD1 2/1/2013 - 1/2/2013	DC2c 2/1/2013 - 1/2/2013	CD3	CD4	CD5
	Ö	ient sampl.	Client sampling date / time	01-FEB-2013 15:00	01-FEB-2013 15:00	01-FFR-2013 15:00	2/1/2013 - 1/2/2013	2/1/2013 - 1/2/2013
Compound	CAS Mimber	IOR	Unit	EN1300416-001	EN1300416-002	EN1300446 000	UI-FEB-ZU13 15:00	01-FEB-2013 15:00
EA120: Ash Content	inguinal ovo				7000	EN 13004 10-003	EN1300416-004	EN1300416-005
Ash Content		0.1	g/m².month	1.0	9.0	0.8	00	
Ash Content (mg)		-	200	0			6.0	0.3
9		-	Ď.	8	10	14	9	ď
EA125: Combustible Matter								>
Combustible Matter		7	alma month					
Company Marie			g/m².monm	0.5	0.3	0.3	0.3	0.1
Combustible Matter (mg)		_	mg	8	9	9	Ľ	
EA141: Total Insoluble Matter							>	-
Total Insoluble Matter	-	0.1	g/m².month	1.5	6.0			
Total Insoluble Matter (mg)		-	mg	26	16	6	0.0	0.4
					2	07		7



: 4 of 4 : EN1300416 : CARBON BASED ENVIRONMENTAL : Rocla Calgo Dusts Analytical Results Project

Page Work Order

Client

Sub-Matrix: DUST (Matrix: AIR)		Ö	Client sample ID	9CD			T II II II	
				2/1/2013 - 1/2/2013				
	Ö	ent sampli	Client sampling date / time	01-FEB-2013 15:00				
Compound	CAS Number LOR	LOR	Unit	EN1300416-006		*****	1	
EA120: Ash Content								
Ash Content		0.1	g/m².month	0.4	-			
Ash Content (mg)		-	ma	7			*******	
			9			******	1	
EA125: Combustible Matter								
Combustible Matter		0.1	g/m².month	0.1				
Combustible Matter (mg)		-	mg					
EA141: Total Insoluble Matter								
Total Insoluble Matter		0.1	g/m².month	0.5				
Total Insoluble Matter (mg)	-	-	mg	œ		*****		





# **Environmental Division**

	CERTIFICATE OF ANALYSIS	OF ANAI YSIS	
Work Order	: ES1302142	Page	:10f3
Client	: CARBON BASED ENVIRONMENTAL	Laboratory	Environmental Division Sydney
Contact	: MR COLIN DAVIES	Contact	Client Services
Address	: 47 BOOMERANG ST	Address	: 277-289 Woodbark Road Smithfield NSW Australia 2164
	CESSNOCK NSW, AUSTRALIA 2325		לפון אופון אופן אופן אופן אופן אופן אופן
E-mail	: cbased@bigpond.com	E-mail	. sydral or lead lead lead lead lead lead lead lead
Telephone	: +61 49904443	Telephone	. +61-2-8784 8555
Facsimile	: +61 02 49904442	Facsimile	+61-2-8784 8500
Project	: ROCIA QUARRY	QC Level	NEDM 1000 Schooling B/2/ A 1 0 0000
Order number			inclimited Schedule b(3) and ALS QCS3 requirement
C-O-C number		Date Samples Received	. 04 EEB 2042
Sampler	CBE	Issue Date	. 08-FEB-2013
Site			
		No. of samples received	4:
Guore number	: SY/428/12	No. of samples analysed	: 4
This report strongs	The state of the s		

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

	NATA Accredited Laboratory 825
NATA	Accredited for compliance with ISO/IEC 17025.

WORLD RECOGNISED
ACCREDITATION

# Accredited Laboratory 825

Signatories
This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Ankit Joshi Dianne Blane Hoa Nauven	Inorganic Chemist Laboratory Coordinator (2IC)	Sydney Inorganics Newcastle
	Sellior Illorgariic Chemist	Sydney Inorganics

NE +61-2-8784 8555 Facsimile +61-2-8784 8500 f the ALS Group An ALS Limited Company Bry 277-289 Woodpark Road Smithfield NSW Australia 2164 | Pr Environmental Division Sydney ABN 84 009 936 029 Parl



 Page
 : 2 of 3

 Work Order
 : ES1302142

 Client
 : CARBON BASED ENVIRONMENTAL

 Project
 : ROCIA QUARRY

### General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society. LOR = Limit of reporting Key:

A = This result is computed from individual analyte detections at or above the level of reporting

EA015 TDS may bias high for sample various samples due to the presence of fine particulate matter, which may pass through the prescribed GF/C paper.



Analytical Results

Project Client

: 3 of 3 : ES1302142 : CARBON BASED ENVIRONMENTAL : ROCIA QUARRY

Page Work Order

Sub-Matrix:

Sub-Matrix: WATER (Matrix: WATER)		Clie	Client sample ID	∢	8	Q	L	-	
	Cii	ent samplir	Client sampling date / time	[01-FEB-2013]	[01-FFB-2013]	[04 EEB 2042]			
			-			[01-r EB-2013]	[01-FEB-2013]		
Compound	CAS Number	LOR	Unit	ES1302142-001	ES1302142-002	ES1302142-003	ES1302142-004		T
EA005: pH									
nH Value		2000	271118						
Aging Colonia		10.0	pH UNIT	6.26	6.76	5.51	5.93		T
EA010P: Conductivity by PC Titrator									T
Electrical Conductivity @ 25°C		1	us/cm	73					-
			500	40	82	117	62		T
EA015: Total Dissolved Solids									T
Total Dissolved Solids @180°C		10	ma/L		70				-
					t	88	70		
lotal Dissolved Solids @180°C		10	mg/L	47		-			T
EA025: Suspended Solids									Ħ
Suspended Solids (SS)		2	ma/l	σ	400				
Superior of the superior of th		ı			60-	\$\$			
Suspended Solids (SS)	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	2	mg/L	-			<. 55		T
EP020: Oil and Grease (O&G)							>		T
Oil & Grease		5	l/bm	٨/					
		,	1	?	C <sub>2</sub>	<5	<5	1	I





# **Environmental Division**

Work Order			
	ES1301940	Page	:10f3
Client	CARBON BASED ENVIRONMENTAL	Laboratory	: Environmental Division Sydney
Contact	: MR COLIN DAVIES	Contact	Client Services
Address	: 47 BOOMERANG ST	Address	. 2772.289 Woodpark Bood Smith and Month and Control of the Contro
	CESSNOCK NSW, AUSTRALIA 2325		
E-mail	: cbased@bigpond.com	E-mail	
Telephone	: +61 49904443	Telenhone	Sydiey@aisglobal.com
Facsimile	: +61 02 49904442	Facsimile	1401-2-8/84 8555
Project	: RAIN EVENT 28 01 13	OC Leviel	. +61-2-8/84 85UU
Order number	1.		: NEPW 1999 Schedule B(3) and ALS QCS3 requirement
C-O-C number			
Sampler		Date Samples Received	: 30-JAN-2013
Site		issue Date	: 06-FEB-2013
		No. of samples received	4.
Cuote number	: SY/428/12	No. of samples analysed	7
This report supersedes	This report supersedes any previous report(s) with this reference. Results apply to the si	ample(s) as submitted	Results apply to the sample(s) as submitted All pages of this round hour hour hours.
release.			Tage of the leave been checked and approved for

This Certificate of Analysis contains the following information:

- General Comments
  - Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with carried out in compliance with pre ISO/IEC 17025.

Ashesh Patel

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been Accreditation Category carried out in compliance with procedures specified in 21 CFR Part 11. Inorganic Chemist Position Signatories Ankit Joshi

Sydney Inorganics Sydney Inorganics

Inorganic Chemist

WORLD RECOGNISED
ACCREDITATION

Address 277-289 Woodpark Road Smithfield NSW Australia 2164 PHONE +61-2-8784 8555 Facsimile +61-2-8784 8500 Environmental Division Sydney ABN 84 009 936 029 Part of the ALS Group An ALS Limited Company



 Page
 : 2 of 3

 Work Order
 : ES1301940

 Client
 : CARBON BASED ENVIRONMENTAL

 Project
 : RAIN EVENT 28 01 13

### General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society. LOR = Limit of reporting

A = This result is computed from individual analyte detections at or above the level of reporting

EA015 TDS, result has been confirmed for sample #1 by re-analysis.



Client : CA Project : RA

Page Work Order

: 3 of 3 : ES1301940 : CARBON BASED ENVIRONMENTAL : RAIN EVENT 28 01 13

Analytical Results

Sub-Matrix: WATER (Matrix: WATER)

Cab-matild. WAIER (Matild: WAIER)		5	Client sample ID	⋖	۵	ш
	Ö	ient sampli	Client sampling date / time	28-IAN-2013 11-00	OC. P. CLOC IANI SC	
	AND THE RESIDENCE OF THE PERSON OF THE PERSO			00:11:0102-11:00 02	20-3414-2013 11:00	28-JAN-2013 11:00
Compound	CAS Number LOR	LOR	Unit	ES1301940-001	ES1301940-002	ES1301940-003
EA005P: pH by PC Titrator						
pH Value	1	0.01	pH Unit	6.47	6.41	507
EA010P: Conductivity by PC Titrator						000
Electrical Conductivity @ 25°C	1	-	µS/cm	62	29	8
EA015: Total Dissolved Solids						3
Total Dissolved Solids @180°C		10	mg/L	75	43	42
EA025: Suspended Solids						74
Suspended Solids (SS)	1	2	mg/L	14	9	99
EP020: Oil and Grease (O&G)						3
Oil & Grease	-	2	mg/L	<5	.€	Ŕ
						,

### Appendix 2

Additional Bureau of Meteorology Data from Peats Ridge and Gosford Monitoring Stations

### Gosford, New South Wales January 2013 Daily Weather Observations



Temps p. p.					Man	wind g	ust			9a	m			3pm							
Date	Day	Min	Max	Rain	Evap	Sun	Dirn	Spd	Time	Temp	RH	Cld	Dirn	Spd	MSLP	Temp	RH	Cld	Dim	Spd	MSLP
	1	*C	*C	mm	mm	hours		km/h	local	,c	%	eighths		km/h	hPa	,c	%	eighths		km/h	hPa
1	Tu	17.2	30.4	0			SE	22	09:39	25.2			ESE	6		28.5			ENE	9	
2	We	17.8	24.1	0			SSE	35	01:38	22.4			SE	13		21.6			ESE	13	
3	Th	17.8	25.4	0			s	24	12:07	20.8			ESE	7		24.5			ENE	9	
4	Fr	13.8	27.3	0			NE	28	16:29	22.8			NNW	11		26.4			ENE	11	
5	Sa	14.6	31.2	0			NE	26	14:31	23.6			N	7		29.7			ENE	9	
6	Su	16.2	28.8	0			NE	28	15:32	24.8			NNE	9		27.7			ENE	9	
7	Mo	18.6		0			ESE	24	13:42	23.5			SE	7		27.6			SE	7	
8	Tu	15.8	41.5				NNW	43	10:31							40.0	13		NW	17	
9	We	21.3	22.3	0.4			SSE	37	05:22	21.4	88		SE	15		21.0	60		SSE	13	
10	Th	18.0	25.5	0			NE	26	14:38	22.3	70		ESE	4		23.4	62		E	11	
11	Fr	16.9	31.9	0			NNE	26	15:14	24.8	68		NNE	7		31.0	53		ENE	11	
12	Sa	17.9	42.3	0			NNW	35	12:49	30.6	56		SE	4		32.0	46		SE	11	
13	Su	18.6	24.4	0			SSE	35	22:37	22.3			SE	7		22.5	98		SE	9	
14	Mo	16.5	21.9	15.4			SSE	44	09:38	18.5			SE	13		21.4	49		SE	20	
15	Tu	15.1	25.1	0			E	28	16:54	20.3			SSW	4		24.4	48		ENE	13	
16	We	13.4	30.0	0			SE	24	11:17	23.4	80		SE	4		28.7	50		E	11	
17	Th	19.7	30.2	0	l .		N	31	16:41	24.2	98		SSE	6		28.7	57		ENE	11	
18	Fr	18.7	44.8	0			N	43	10:14	29.3			SSE	2		43.9	15		NW	11	
19	Sa	21.3	24.2	0.4			SW	33	23:45	21.9	83		SE	7		21.2	79		SE	11	
20	Su	17.8	23.8	7.2			NNW	22	20:57					Calm		21.6	98		SE	7	
21	Mo	18.8	26.7	2.6			NE	22	18:10	23.6			NNE	4		25.7	62		E	9	
22	Tu	16.5	32.4	0			SE	26	11:45	25.0			ENE	7		28.6	64		ENE	7	
23	We	19.3	23.2	0.6			SSE	33	15:36	21.2			SSE	7		22.2	92		SE	11	
24	Th	19.4	27.7	0	l .		SE	26	13:24	21.6				Calm		26.4	69		SSE	13	
25	Fr	19.2	31.1	0			NE	31	18:32	24.9			N	6		29.5	59		NE	13	
26	Sa	21.2	30.6	0			NE	48	13:42	26.3	90		NE	9		27.5	78		ENE	13	
27	Su	20.3	22.3	31.8			N	19	23:10					Calm						Calm	
28	Мо	20.4	22.6	51.2			NE	43	21:26					Calm					ENE	11	
29	Tu	19.9	28.1	197.2			SE	39	12:17	22.4			N	4		21.1	99		SE	13	
30	We	18.7	25.8	5.2			SE	19	15:06	20.9			SE	6		24.5	68		SSE	9	
31	Th	18.1	29.2	0			ENE	35	13:15	24.4	98		NNE	4		27.7	73		NE	11	
Statistic	s for Ja									20.4	0.0					20.0	0.01				
	Mean	18.0 13.4	28.5 21.9							23.4 18.5				6 Calm		26.9 21.0	63 13			10 Calm	
	Lowest Highest	21.3	44.8	197.2			NE	48		30.6	99		SE	Caim 15		43.9	99		SE	Caim 20	
	Total	21.3	77.0	312.0			INE	70		30.0	99		3E	10		40.8	99		35	20	
Observatio		un trom Co	orford /Nor		h Ctation)	AVAIR (clatic	n 0510071								ID/	CJDW2048.2	01201 D	opared at t	2:00 LITC o	n 7 Enh 00	112

Observations were drawn from Gosford (Narara Research Station) AWS (station 061087)

The closest station with pressure observations is at Norah Head about 27 km to the northeast. The closest station with cloud and evaporation data is at Peats Ridge about 15 km to the northwest. The closest station with sunshine observations is at Sydney Airport about 59 km to the south.

IDCJDW2048.201301 Prepared at 13:00 UTC on 7 Feb 2013 Copyright © 2013 Bureau of Meteorology

Users of this product are deemed to have read the information and accepted the conditions described in the notes at http://www.bom.gov.au/climate/dwo/iDCJDW0000.pdf