



Carbon Based Environmental
Pty Limited
ABN 74 102 920 285

**Rocla Quarry Products
Calga Quarry**

Environmental Monitoring

**Dust Deposition Gauges, Surface and Ground
Waters and Meteorological Station**

September 2014

A handwritten signature in black ink, appearing to read 'Colin Davies'.

Colin Davies BSc MEIA CENVP
Environmental Scientist
Date: 20 October 2014

Executive Summary

Carbon Based Environmental is contracted by Rocla Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- Dust Deposition Gauges;
- Surface Waters;
- Groundwaters; and
- Meteorological Station.

This report was prepared by Carbon Based Environmental and includes the following;

- Dust Deposition results for September 2014;
- Surface Water quality results for September 2014;
- Groundwater depth and quality results for September 2014; and
- Meteorological report for September 2014.

The September 2014 dust deposition results for insoluble solids were generally low and free of major contamination this month. All sites, on a rolling annual average basis, are currently below the Air Quality Management Plan exceedance level of 3.7g/m².month. Results were found to be representative of dust levels as determined by the Australian Standard.

Surface water samples were collected on 2 October 2014 at sites A and B. There was no flow at Site B, Site C was inaccessible and Site D had insufficient water and was unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic to neutral range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any site in September 2014.

Groundwaters were sampled for normal monthly monitoring on 2 October 2014. Groundwater depth generally increased across the sampled groundwater bores when compared to last month. Groundwater pH increased slightly and EC remained steady across all bores this month.

Data for September 2014 shows that rainfall recorded at the Rocla Calga Quarry was higher than the Gosford BOM and lower than the Peats Ridge long term mean rainfall for September. The rainfall comparison is provided below:

Rocla Calga Quarry	70.0 mm
BOM Peats Ridge*	NA
BOM Gosford*	50.0 mm
BOM Peats Ridge Long term mean for September*	73.6 mm

NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au). No data was available from the BOM Peats Ridge station for September 2014

Note: Differences in the daily rainfall readings between BOM and the Rocla station may occur due to BOM stations reporting rainfall at 9am and the Rocla station recording rainfall at midnight.

Sampling Program

Rocla Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. Carbon Based Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. Carbon Based Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 “Methods for Sampling and Analysis of Ambient Air Method 10.1 Determination of Particulates—Deposited Matter—Gravimetric Method”. Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m².month.

Surface waters are sampled in accordance with Australian Standards AS5667.1 “Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples”, AS5667.6 “Water Quality Sampling—Guidance on sampling of rivers and streams” and AS5667.4 “Water Quality Sampling—Guidance on sampling from lakes, natural and man-made”. Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards AS5667.1 “Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples” and AS5667.11 “Water Quality Sampling—Guidance on sampling of ground waters”. Groundwater monitoring sites are sampled at least bi-monthly for water quality and at least quarterly for water level. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real time display. Wind parameters are measured according to Australian Standard AS 2923 “Ambient Air— Guide for Measurement of Horizontal Wind for Air Quality Applications”.

The weather stations have the following sensor configuration;

Air temperature

- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

Carbon Based Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

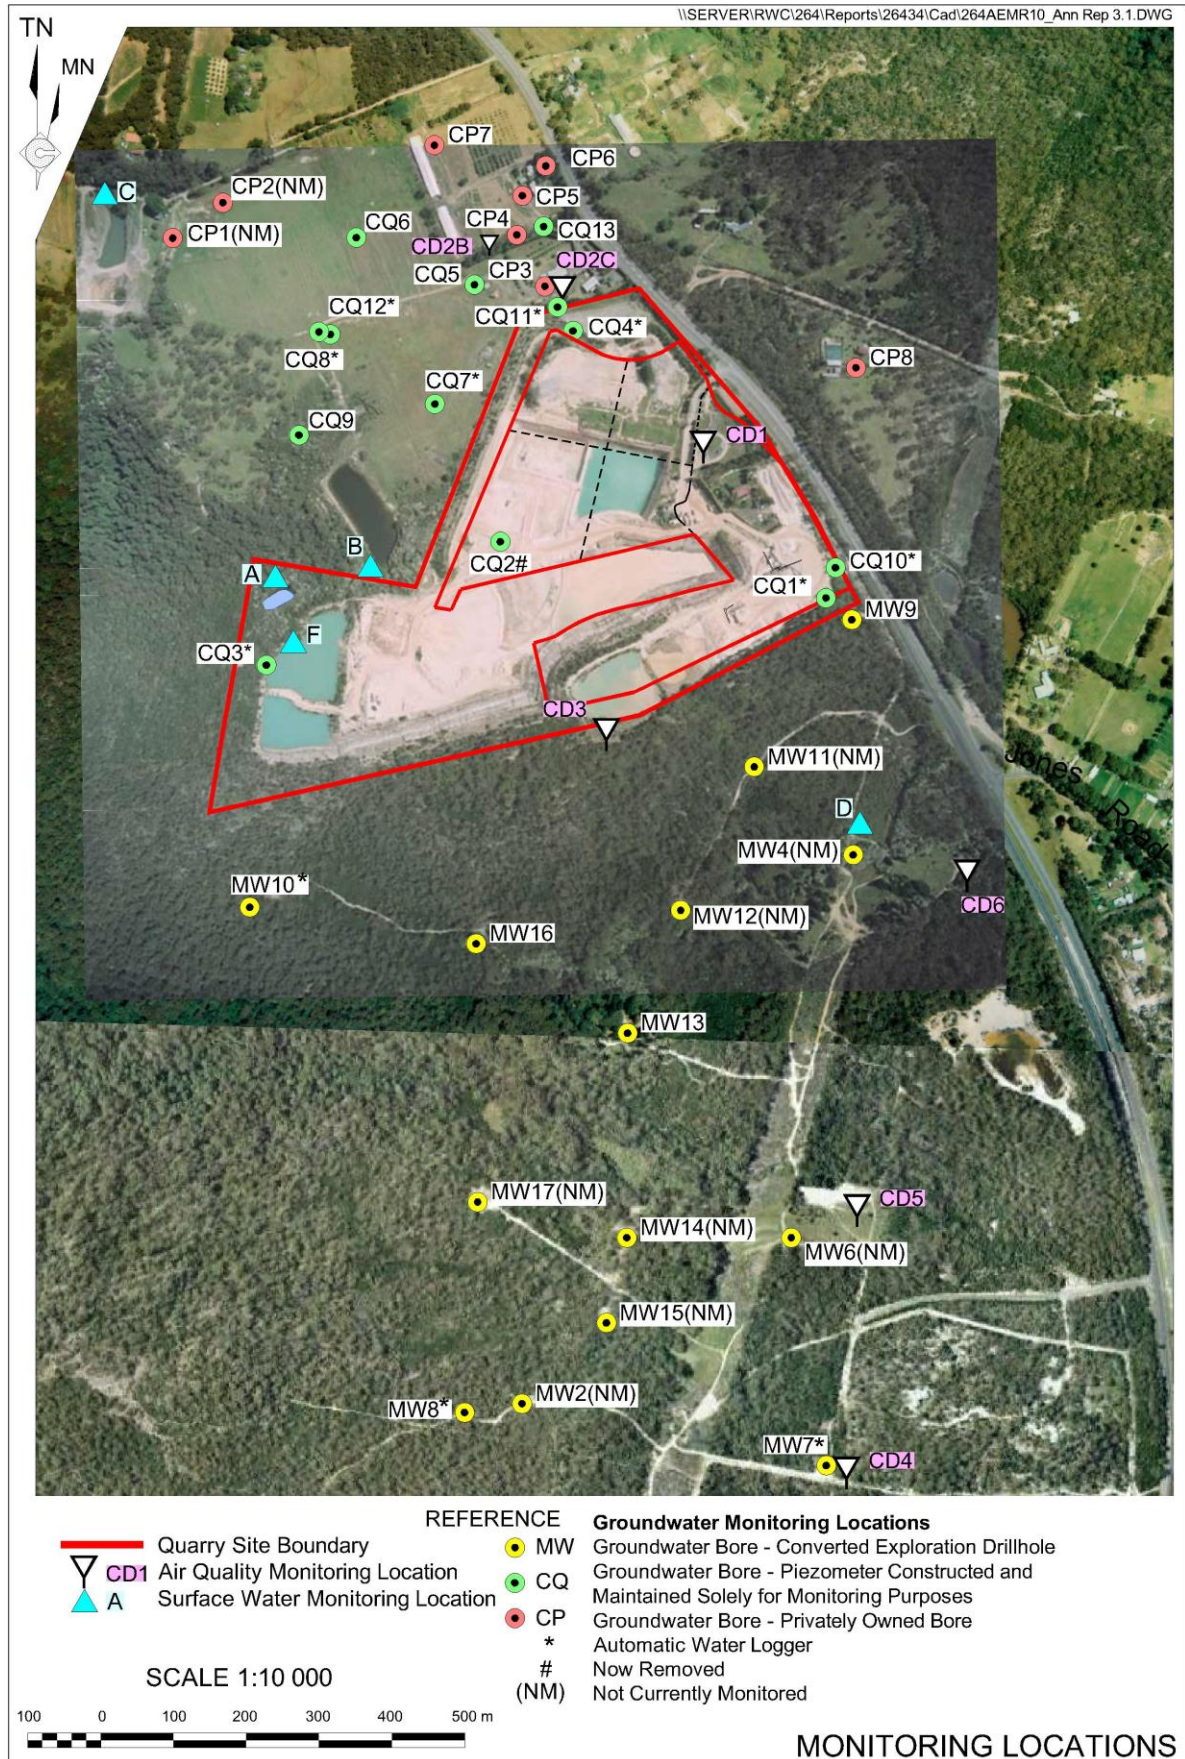


Figure 1: Rocla Calga Quarry environmental monitoring locations

2.0 Monthly Results

2.1 Dust Deposition Gauges

Table 1 displays the results for September 2014 and the project 12 month rolling average. Results are in g/m².month.

Table 1: Dust Deposition results: 4 September 2014 – 2 October 2014 (28 days)

Site	Monthly Insoluble Solids g/m ² .month	Monthly Ash Residue g/m ² .month	Monthly Combustible Matter g/m ² .month	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids g/m ² .month
CD1	0.5	0.4	0.1	80	1.3
CD2c	0.4	0.3	0.1	75	1.1
CD3	0.4	0.4	<0.1	100	2.5
CD4	0.4	0.2	0.2	50	0.7
CD5	0.2	0.1	0.1	50	0.5
CD6	0.4	0.2	0.2	50	0.9


Insoluble Solids marked with an * indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m².month; the Development Consent's annual average amenity criteria at residential locations. The current rolling annual average is calculated from August 2013 to July 2014.

NA= Not Available.

CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The laboratory analysis is provided in **Appendix 1**.

Figure 2: Dust Deposition Charts

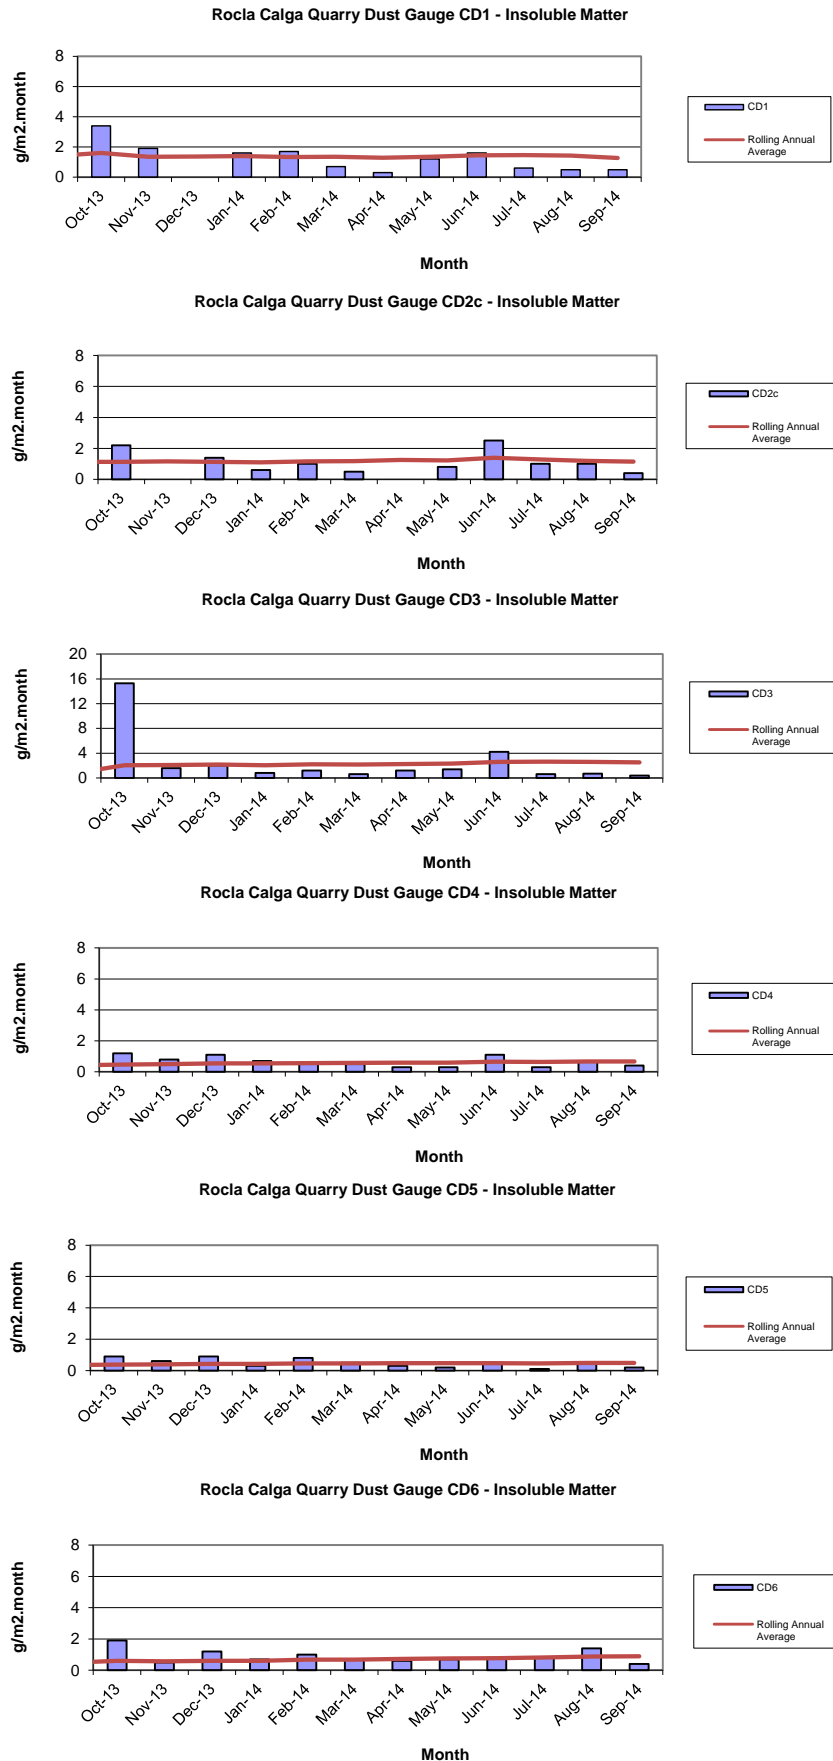

2.2 Surface Water Monitoring

Monthly surface water monitoring was conducted on the 2 October 2014 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

Table 2: Monthly surface water monitoring – September grab sample results

Site	Observed Flow Rate	Water Colour	Turbidity	pH	EC (µS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
A	Dam	Clear	Clear	6.0	72	44	<5	<5
B	No flow							
C	No access							
D	Too low to sample							
F	Dam	Clear	Clear	5.7	78	50	9	<5

Samples were collected at sites A and B. There was no flow at Site B, Site C was inaccessible and Site D had insufficient water and was unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic to neutral range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any site in September 2014.

2.3 Groundwater Monitoring

Groundwaters were sampled on 2 October 2014. Water quality tests for pH and electrical conductivity were conducted by Carbon Based Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and Electrical Conductivity (+/- 5%) was obtained between samples. Data is displayed in **Table 3** and **Figures 3 to 6**.

Groundwater depth generally increased compared to last month, indicating water generally moving away from the surface. The exceptions were CQ4, CQ5, CQ11S, CQ12, CP3, CP8, MW7, MW8 and MW10 which showed a slight decrease in depth.

pH at all sites is in the acidic to neutral range. pH levels increased slightly across a majority of sampled sites. EC levels remained similar when compared to the results obtained in August 2014.

Table 3: Groundwater Quality Data

Reference	Bore	Type	Depth to water TOC (m) April 06	Depth to water TOC (m) This report	pH This report	Electrical Conductivity (μ S/cm) This report
CQ1	Voutos	* Monitor	20.59	Removed		
CQ3	Voutos	* Monitor	10.53	10.46	6.3	170
CQ4	Voutos	* Monitor	8.78	10.91	4.3	145
CQ5	Gazzana	DIP Only	8.69	7.10	4.3	190
CQ6	Gazzana	DIP Only	16.00	10.60	4.1	213
CQ7	Gazzana	* Monitor	6.89	6.29	4.3	128
CQ8	Gazzana	* Monitor	11.03	5.76	4.3	158
CQ9	Gazzana	DIP Only	10.10	8.95	4.1	139
CQ10	Voutos	* Monitor	NI	24.37	4.1	182
CQ11S	Gazzana	* Monitor	NI	11.31	4.5	173
CQ11D	Gazzana	* Monitor	NI	12.46	4.7	184
CQ12	Gazzana	* Monitor	NI	4.05	4.0	163
CQ13	Kashouli	* Monitor	NI	15.03	4.1	248
CP3	Gazzana	Domestic	10.40	9.46	4.5	163
CP4	Kashouli	Domestic	13.63	10.99	NM	NM
CP5	Kashouli	Domestic	16.61	10.13	3.8	252
CP6	Kashouli	Domestic	16.27	11.84	3.3	213
CP7	Kashouli	Production	8.56	3.39	4.3	132
CP8	Rozmanec	Domestic	22.17	20.3	3.4	166
MW7	Rocla Bore	* Monitor	15.76	15.44	3.9	135
MW8	Rocla Bore	* Monitor	9.82	7.44	4.1	99
MW9	Rocla Bore	* Monitor	22.44	23.02	4.6	98
MW10	Rocla Bore	* Monitor	15.41	11.45	4.0	145
MW13	Rocla Bore	DIP Only	NI	7.73	4.1	120
MW16	Rocla Bore	DIP Only	NI	8.3	4.3	127
MW17	Rocla Bore	DIP Only		10.03	4.9	139

Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to non-operational pump.

NR = Not Required by resident.

* = Logger Installed.


NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.

Shading is used to indicate the following trends in water depth (compared to the last reading):


	Increase to ground water depth (water moved away from surface)
	Decrease to ground water depth (water moved towards surface)
	Stable water depth (+/- 0.01m)

Available groundwater loggers were downloaded and will be forwarded to the Rocla Calga Quarry groundwater consultant.


Figures 3 to 6: Groundwater Depth Charts.

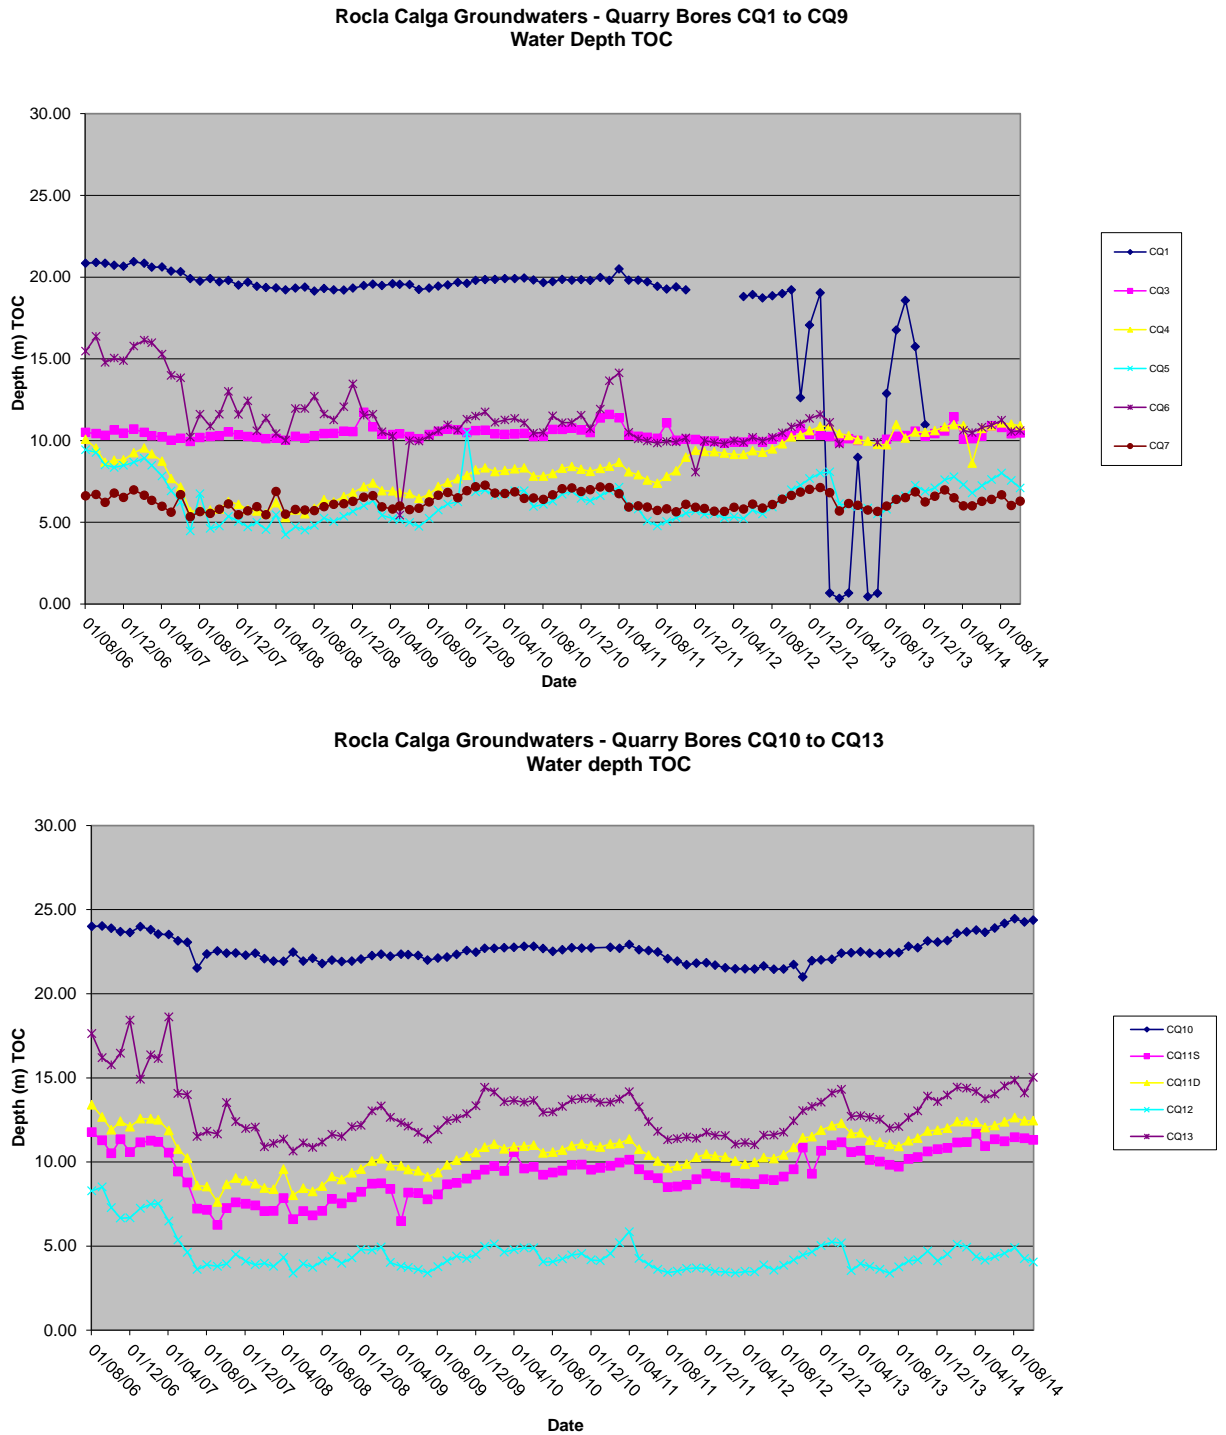

Rocla Calga Groundwaters - Quarry Bores CP3 to CP8
Water Depth TOC

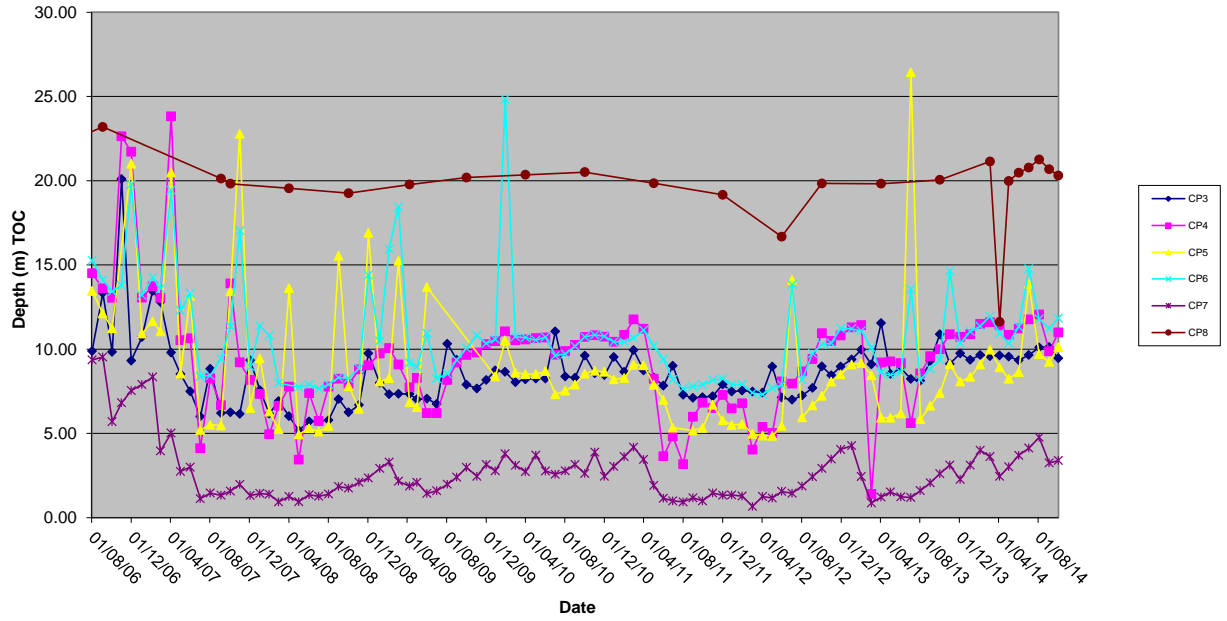

Rocla Calga Groundwaters - Quarry Bores MW7 to MW17
Water Depth TOC

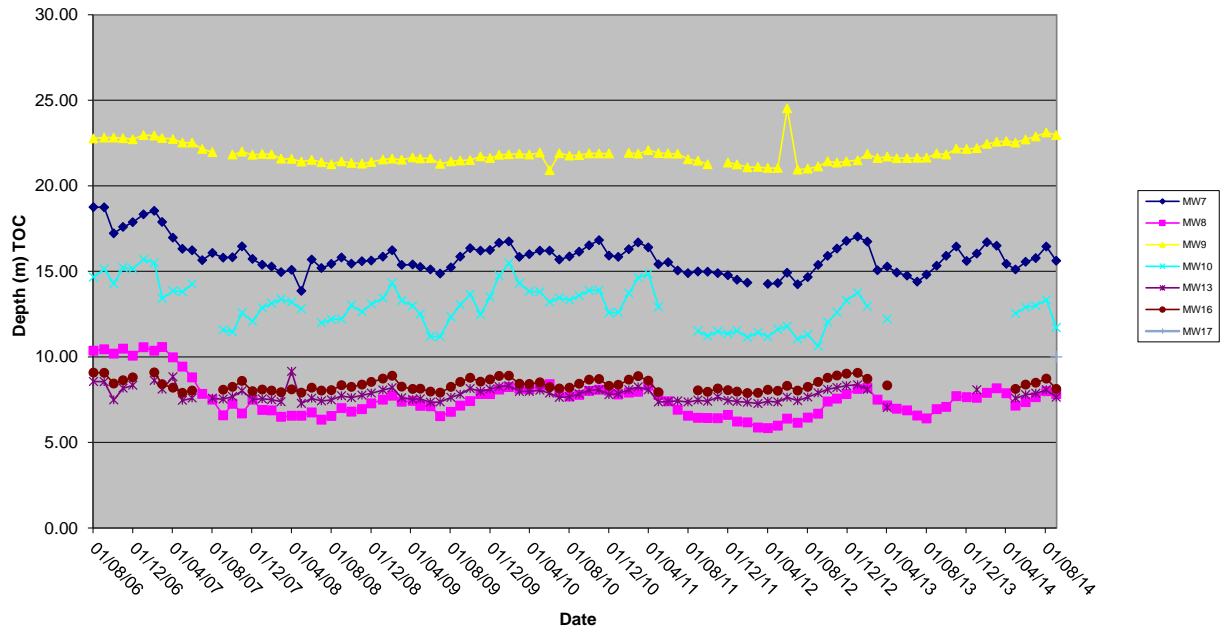

2.4 Meteorological Monitoring

The Rocla Calga Quarry weather station data recovery in September 2014 was approximately 100%.

The weather station data follows and includes;

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

Monthly weather statistics from the nearby Bureau of Meteorology (BOM) at Peats Ridge station are no longer available. However, the long term rainfall mean is available via a link on the Gosford BOM Daily Weather Observation page.

Data for September 2014 shows that rainfall recorded at the Rocla Calga Quarry was higher than the Gosford BOM and lower than the Peats Ridge long term mean rainfall for August.

The rainfall comparison is provided below:

Rocla Calga Quarry	70.0 mm
BOM Peats Ridge*	NA
BOM Gosford*	50.0 mm
BOM Peats Ridge Long term mean for September*	73.6 mm

NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).




Results are displayed in the following table and figures.




2.4.1 Monthly Meteorological Data Summary




Summary Sep-14 Rocla - Calga

Date	Min Temp	Av Temp	Max Temp	Min %RH	Av %RH	Max %RH	RAIN mm	ET mm	Min WS	Av WS	Max WS	Min wind chill	Max Heat index	Min Atm P	Av Atm P	Max Atm P	Min Solar Rad	Av Solar Rad	Max Solar Rad	Min Data %	Av data %	Max Data %
1/09/2014	7.3	15.5	24.1	39	69	99	0.0	2.8	0	1.6	9.4	7.4	23.5	1009.1	1013.0	1016.6	0	132.0	784	92.1	97.3	98
2/09/2014	6.8	13.0	17.3	52	68	92	3.6	1.9	0	3.0	16.1	3.1	16.5	1005.5	1008.0	1010.9	0	60.4	506	90.6	95.7	98
3/09/2014	6.8	10.9	14.5	49	61	91	0.8	3.2	1.3	5.3	15.2	3.1	13.3	1008.9	1011.9	1014.2	0	108.0	704	88	93.8	97.1
4/09/2014	8.2	11.0	14.9	55	66	90	1.5	2.3	0.9	3.0	12.1	5.9	13.7	1012.7	1014.8	1017.7	0	88.7	621	87.1	93.5	98
5/09/2014	8.1	11.0	15.8	59	82	96	5.3	1.9	0.4	2.1	11.6	6.6	14.9	1017.6	1020.7	1024.5	0	115.5	759	88.3	95.3	98
6/09/2014	8.1	10.8	15.0	90	97	98	44.4	0.9	0	1.2	7.2	7.7	14.8	1024.4	1027.6	1029.8	0	75.8	673	74.6	91.5	98
7/09/2014	10.0	12.0	17.8	73	94	99	6.1	1.3	0	1.1	5.8	9.3	17.6	1026.5	1029.0	1031.1	0	97.5	641	73.4	96.2	98
8/09/2014	7.3	12.9	21.3	56	86	99	0.5	2.1	0	0.9	7.6	7.4	20.6	1021.0	1025.2	1028.6	0	133.4	890	89.2	96.3	98
9/09/2014	9.7	16.6	24.2	47	74	97	0.0	2.5	0	1.8	9.4	9.4	23.7	1007.6	1014.5	1020.8	0	122.8	768	86.3	96.4	98
10/09/2014	12.1	16.6	22.4	38	66	96	6.1	3.8	0	3.7	13	11.2	21.4	1004.5	1008.6	1014.3	0	130.1	891	89.8	95.4	98
11/09/2014	9.0	16.5	25.7	36	58	83	0.0	3.1	0	1.4	8	8.4	24.9	1012.3	1015.1	1019.7	0	142.3	762	87.7	94.8	98
12/09/2014	11.8	13.6	17.7	63	81	94	0.0	1.4	0	1.1	6.7	11.9	16.9	1019.6	1023.0	1024.9	0	84.9	637	89.2	95.5	98
13/09/2014	10.9	13.5	18.9	74	91	98	1.3	1.2	0	1.1	6.3	10.9	18.6	1021.4	1023.3	1025.8	0	80.2	449	96.5	97.8	98
14/09/2014	8.3	15.6	26.0	38	82	99	0.0	2.3	0	1.0	7.2	8.4	25.4	1013.9	1017.7	1021.4	0	128.3	765	96.2	97.7	98
15/09/2014	10.8	15.2	23.0	41	82	98	0.0	2.3	0	1.4	7.6	10.9	22.9	1013.4	1015.5	1017.9	0	127.7	766	88.6	97.1	98
16/09/2014	12.9	17.3	25.0	34	69	95	0.3	3.0	0.4	3.0	12.1	12.3	24.6	1004.0	1008.5	1013.8	0	108.0	741	91.5	96.9	98
17/09/2014	11.1	15.3	21.7	33	52	71	0.0	4.6	0	4.5	13.9	10.0	19.8	1008.4	1010.8	1014.3	0	139.3	811	90.9	97.1	98
18/09/2014	7.6	12.3	20.4	26	57	75	0.0	3.1	0	1.3	8.9	7.6	18.2	1014.2	1017.1	1020.7	0	156.4	819	88	97.2	98
19/09/2014	5.1	11.9	21.0	30	63	91	0.0	2.6	0	0.5	4.9	5.1	18.9	1017.4	1019.8	1021.4	0	151.1	742	89.2	97.5	98
20/09/2014	5.9	11.4	18.6	52	76	94	0.0	2.0	0	1.0	8.5	5.9	17.4	1019.7	1023.2	1027.1	0	117.8	630	93.3	97.4	98
21/09/2014	8.2	12.6	20.2	52	81	94	0.0	2.1	0	0.9	6.3	8.0	19.6	1025.8	1027.9	1029.9	0	138.4	757	88.9	97.3	98
22/09/2014	9.2	13.8	21.9	47	77	96	0.0	2.6	0	0.8	5.8	9.2	21.0	1027.1	1029.0	1031.2	0	158.6	838	91.8	97.3	98
23/09/2014	8.2	14.6	23.9	41	79	98	0.0	2.9	0	1.2	7.6	8.2	23.6	1023.9	1026.7	1029.5	0	169.2	832	89.5	97.2	98
24/09/2014	8.6	16.9	28.6	30	73	98	0.0	2.8	0	1.2	7.2	8.6	27.7	1012.0	1018.5	1023.8	0	148.6	821	88	96.6	98
25/09/2014	13.9	16.7	22.8	60	77	88	0.3	1.8	0	1.8	10.7	13.3	22.6	1007.9	1010.8	1014.3	0	75.7	570	89.2	97.0	98
26/09/2014	12.3	15.0	20.7	55	76	89	0.0	2.2	0	1.5	3.1	12.3	20.4	1013.9	1015.5	1017.6	0	111.5	789	86.5	97.3	98
27/09/2014	10.4	14.2	20.4	56	78	95	0.0	2.3	0	1.1	7.6	10.5	19.8	1017.1	1019.1	1021.8	0	140.5	802	90.1	97.8	98
28/09/2014	9.0	16.4	26.3	34	71	98	0.0	3.1	0	1.2	9.8	9.1	25.4	1014.5	1018.0	1021.4	0	165.3	842	90.9	97.7	98
29/09/2014	14.4	22.6	31.8	22	42	74	0.0	4.8	0	2.5	9.8	13.9	30.2	1010.3	1012.9	1015.1	0	164.7	823	96.5	97.7	98
30/09/2014	19.7	25.0	32.9	20	36	46	0.0	6.3	0	3.8	16.5	19.8	31.2	1006.2	1009.5	1013.0	0	141.4	869	88.6	97.7	98
Monthly	5.1	14.7	32.9	20	72	99	70.0	79.0	0	1.9	16.5	3.1	31.2	1004	1017.8	1031.2	0	123.8	891	73.4	96.5	98

2.4.2 Monthly Weather Charts

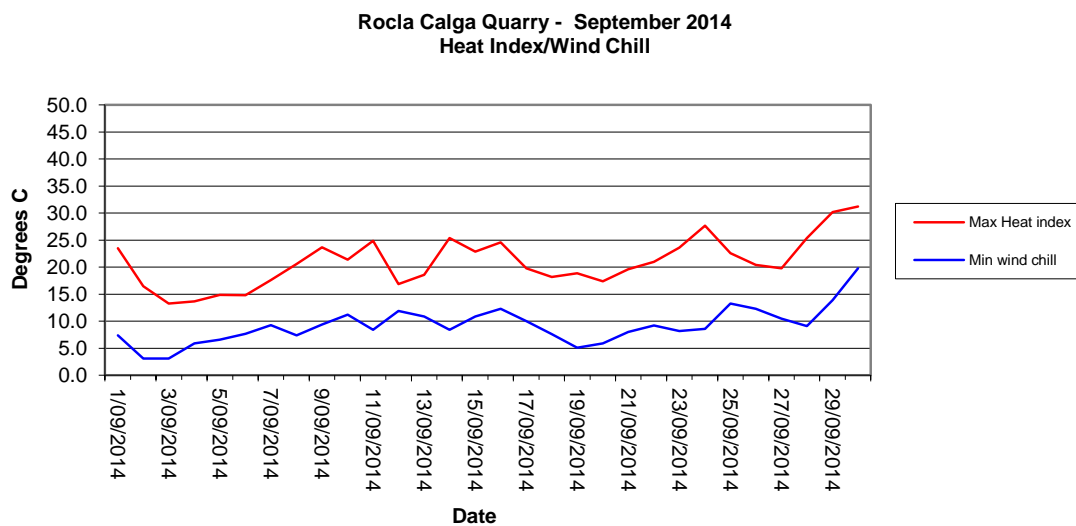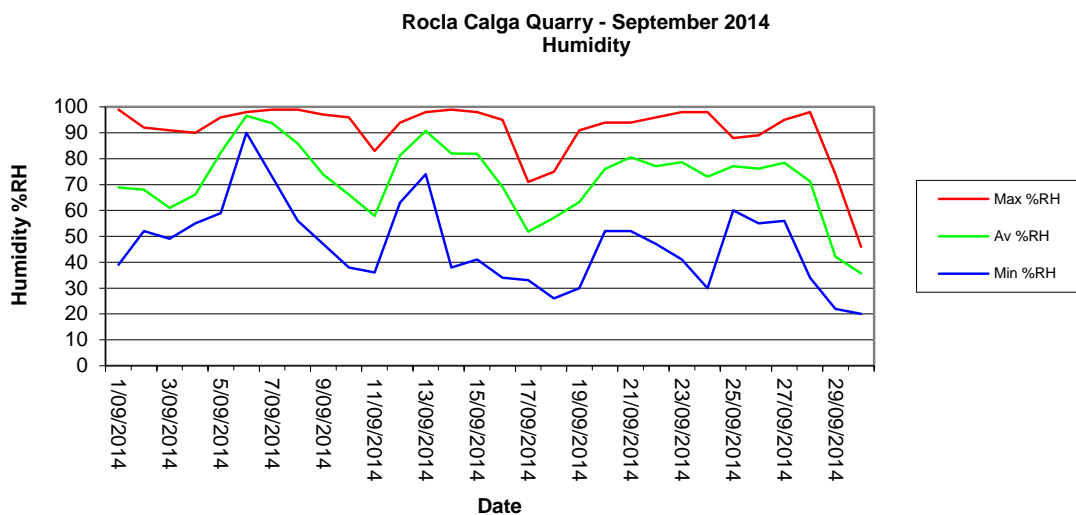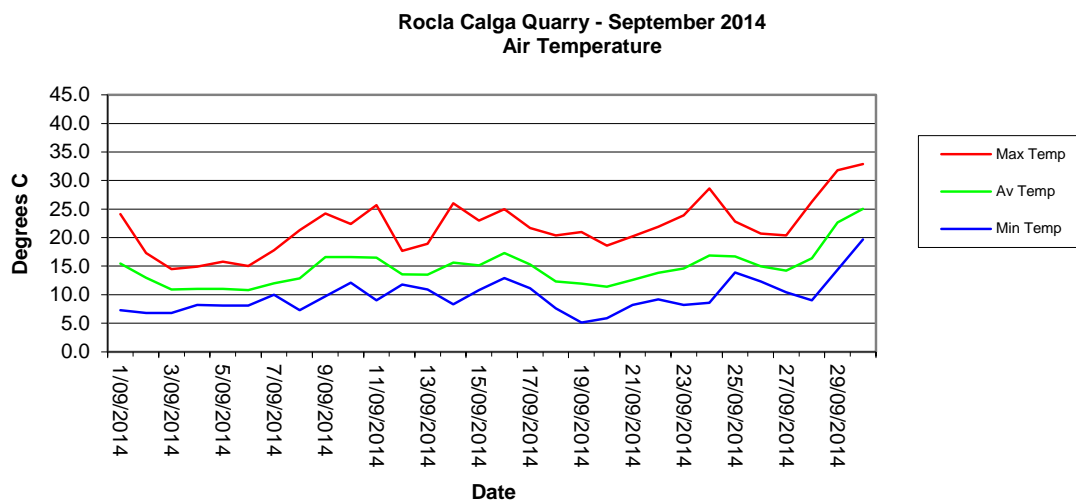

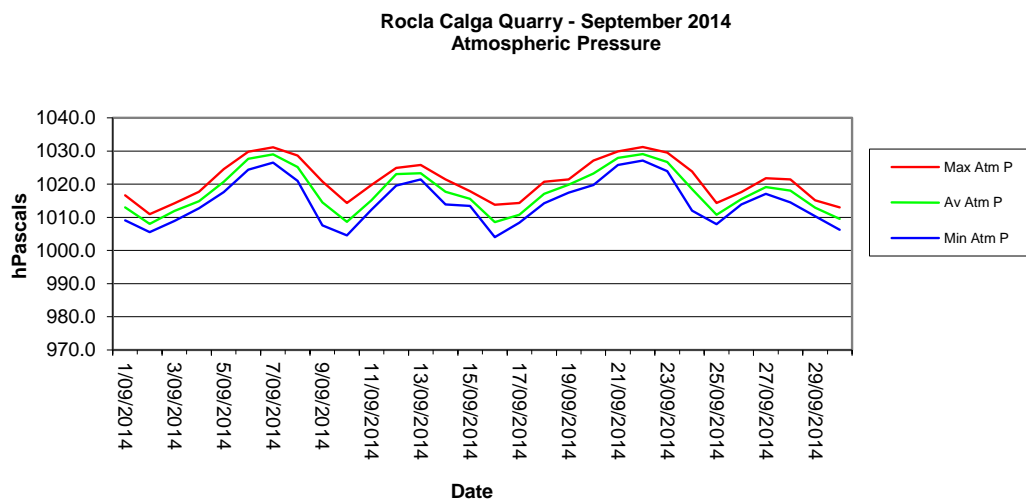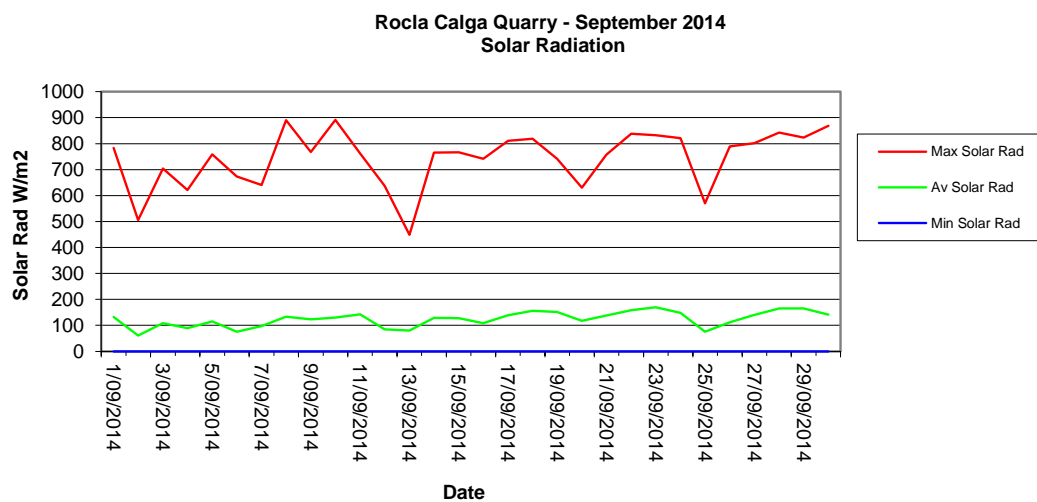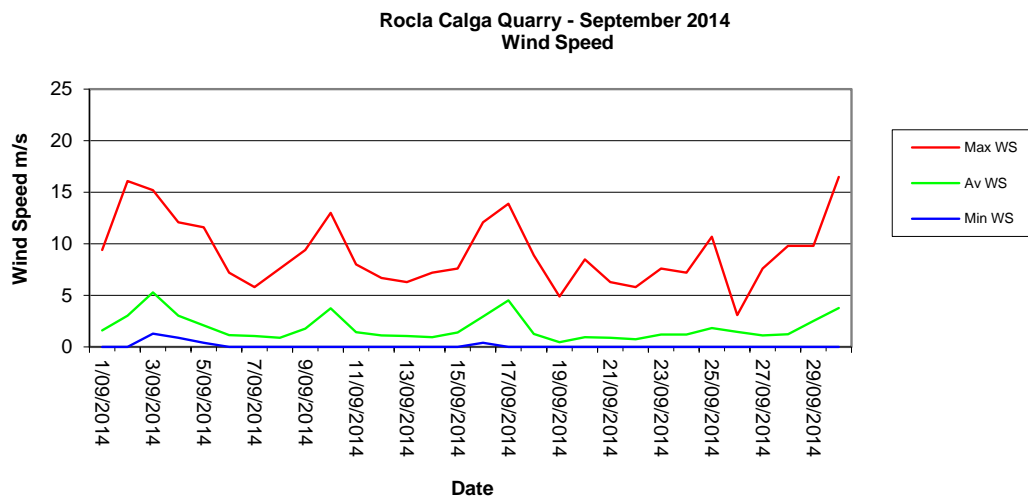


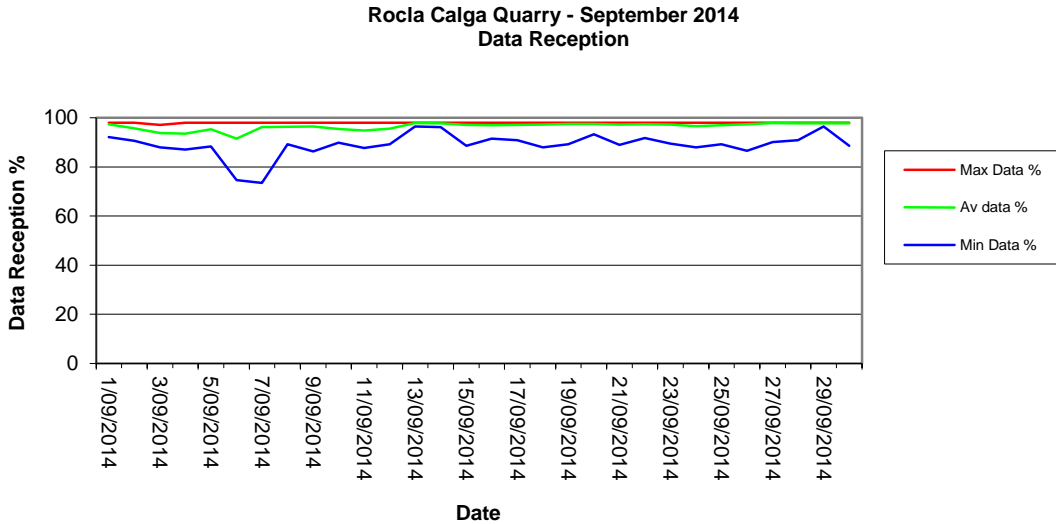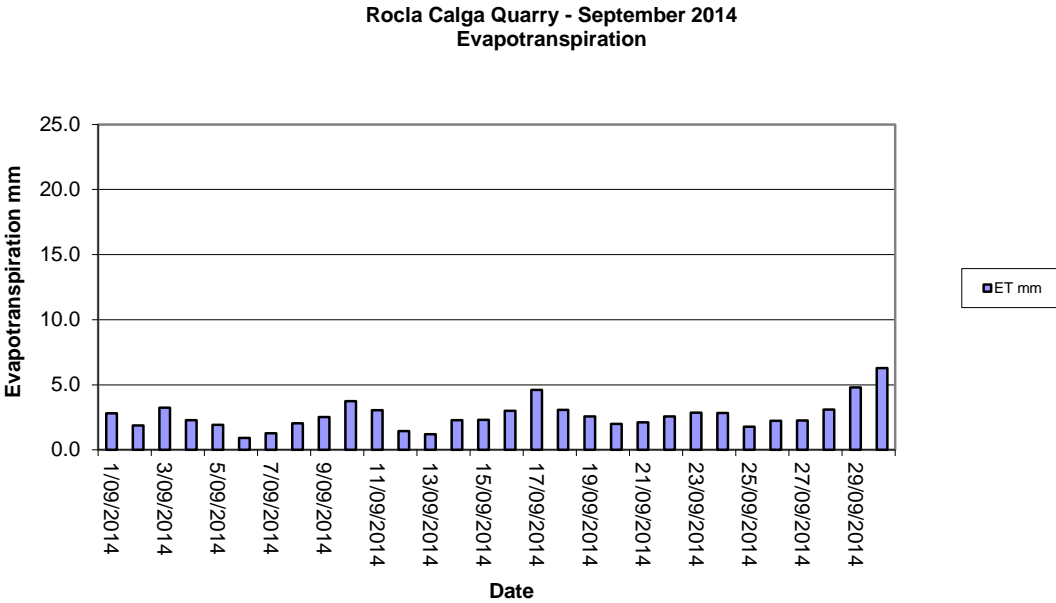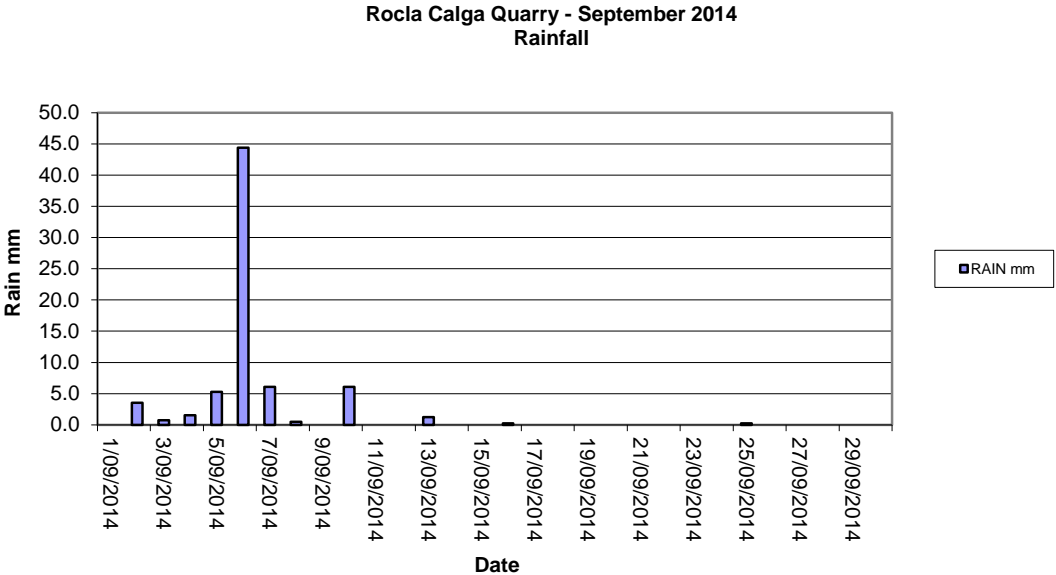

2.4.3 Monthly Windrose Plot

Frequency plot of the average wind speed and average direction over each 15 minute sampling period. Wind is considered to be calm when less than a 15 minute average of 1m/s.

00:00, 1 September 2014 – 23:45, 30 September 2014

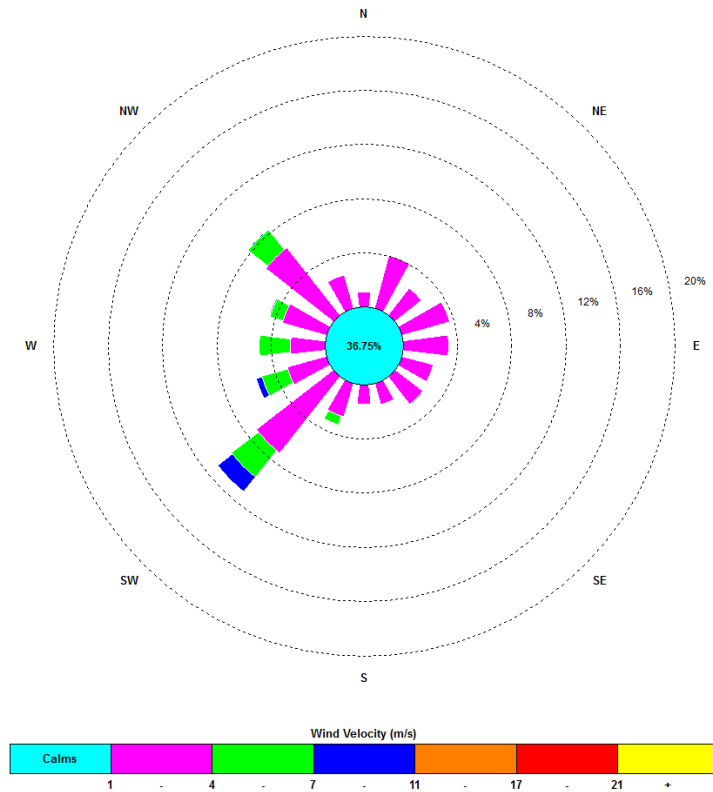

The predominant winds were from the SW, with most frequent, strongest winds from the SW. The maximum wind speed was 16.5 m/s from the NW.

Appendix 1

Laboratory Certificates

CERTIFICATE OF ANALYSIS

Work Order	: EN1410079	Page	: 1 of 4
Client	: CARBON BASED ENVIRONMENTAL	Laboratory	: Environmental Division Newcastle
Contact	: MR COLIN DAVIES (cbased)	Contact	: Peter Keyte
Address	: 47 BOOMERANG ST CESSNOCK NSW, AUSTRALIA 2325	Address	: 5/585 Maitland Road Mayfield West NSW Australia 2304
E-mail	: cbased@bigpond.com	E-mail	: peter.keyte@alsglobal.com
Telephone	: +61 49904443	Telephone	: +61 2 4014 2500
Facsimile	: +61 02 49904442	Facsimile	: +61 2 4968 0349
Project	: Rocla Calga Dusts	QC Level	: NEPM 2013 Schedule B(3) and ALS QCS3 requirement
Order number	: ----	Date Samples Received	: 02-Oct-2014 14:00
C-O-C number	: ----	Date Analysis Commenced	: 09-Oct-2014
Sampler	: ----	Issue Date	: 14-Oct-2014 22:01
Site	: ----		
Quote number	: ----	No. of samples received	: 6
		No. of samples analysed	: 6

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

<i>Signatories</i>	<i>Position</i>	<i>Accreditation Category</i>
Dianne Blane	Laboratory Coordinator (2IC)	Newcastle - Inorganics



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

ø = ALS is not NATA accredited for these tests.

- Analysis as per AS3580.10.1-2003. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m².mth as sampling data was provided by the client.



Analytical Results

Sub-Matrix: DUST
 (Matrix: AIR)

Client sample ID

				CD1 04/09/14 - 02/10/14	CD2c 04/09/14 - 02/10/14	CD3 04/09/14 - 02/10/14	CD4 04/09/14 - 02/10/14	CD5 04/09/14 - 02/10/14
Client sampling date / time				[02-Oct-2014]	[02-Oct-2014]	[02-Oct-2014]	[02-Oct-2014]	[02-Oct-2014]
Compound	CAS Number	LOR	Unit	EN1410079-001	EN1410079-002	EN1410079-003	EN1410079-004	EN1410079-005
				Result	Result	Result	Result	Result
EA120: Ash Content								
Ash Content	----	0.1	g/m ² .month	0.4	0.3	0.4	0.2	0.1
Ash Content (mg)	----	1	mg	6	5	7	4	2
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m ² .month	0.1	0.1	<0.1	0.2	0.1
Combustible Matter (mg)	----	1	mg	2	2	<1	2	1
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m ² .month	0.5	0.4	0.4	0.4	0.2
Total Insoluble Matter (mg)	----	1	mg	8	7	7	6	3



Analytical Results

Sub-Matrix: DUST
 (Matrix: AIR)

Client sample ID

				CD6	----	----	----	----
				04/09/14 - 02/10/14	----	----	----	----
				[02-Oct-2014]	----	----	----	----
				EN1410079-006	-----	-----	-----	-----
				Result	Result	Result	Result	Result
EA120: Ash Content								
Ash Content	----	0.1	g/m ² .month	0.2	----	----	----	----
Ash Content (mg)	----	1	mg	3	----	----	----	----
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m ² .month	0.2	----	----	----	----
Combustible Matter (mg)	----	1	mg	3	----	----	----	----
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m ² .month	0.4	----	----	----	----
Total Insoluble Matter (mg)	----	1	mg	6	----	----	----	----



Environmental

CERTIFICATE OF ANALYSIS

Work Order : **ES1440122**
Client : **CARBON BASED ENVIRONMENTAL**
Contact : **MR COLIN DAVIES (cbased)**
Address : **47 BOOMERANG ST**
CESSNOCK NSW, AUSTRALIA 2325
E-mail : **cbased@bigpond.com**
Telephone : **+61 49904443**
Facsimile : **+61 02 49904442**
Project : **ROCLA QUARRY**
Order number : **----**
C-O-C number : **----**
Sampler : **----**
Site : **----**
Quote number : **----**

Page : **1 of 2**
Laboratory : **Environmental Division Sydney**
Contact : **----**
Address : **277-289 Woodpark Road Smithfield NSW Australia 2164**
E-mail : **----**
Telephone : **+61-2-8784 8555**
Facsimile : **+61-2-8784 8500**
QC Level : **NEPM 2013 Schedule B(3) and ALS QCS3 requirement**
Date Samples Received : **02-Oct-2014 19:30**
Date Analysis Commenced : **02-Oct-2014**
Issue Date : **14-Oct-2014 22:29**
No. of samples received : **2**
No. of samples analysed : **2**

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Ankit Joshi	Inorganic Chemist	Sydney Inorganics
Ashesh Patel	Inorganic Chemist	Sydney Inorganics
Merrin Avery	Supervisor - Inorganic	Newcastle - Inorganics



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

ø = ALS is not NATA accredited for these tests.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Client sample ID

				A	F	----	----	----
Client sampling date / time				[02-Oct-2014]	[02-Oct-2014]	----	----	----
Compound	CAS Number	LOR	Unit	ES1440122-001	ES1440122-002	-----	-----	-----
				Result	Result	Result	Result	Result
EA005: pH								
pH Value	----	0.01	pH Unit	6.02	5.65	----	----	----
EA010P: Conductivity by PC Titrator								
Electrical Conductivity @ 25°C	----	1	µS/cm	72	78	----	----	----
EA015: Total Dissolved Solids								
Total Dissolved Solids @180°C	----	10	mg/L	44	50	----	----	----
EA025: Suspended Solids								
[^] Suspended Solids (SS)	----	5	mg/L	<5	9	----	----	----
EP020: Oil and Grease (O&G)								
Oil & Grease	----	5	mg/L	<5	<5	----	----	----



Today's Collection	
Time Start:	8:15
Time Finish:	12:55

Date: 2.10.14

Client : Rocla Calga
Project :

GROUNDWATERS

Site	DEPTH	Odour	Water Turbidity	Water Colour	1		2		Bottles (Apr/Oct)	Downloaded Logger? (Y/N)
					pH	EC	pH	EC		
CQ3	10.46	yes	CST	CLO O B G	6.39	172.5 uS	6.29	170.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ4	10.91	N	CST	CLO O B G	4.20	147.3 uS	4.30	144.5 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ5	7.10	N	CST	CLO O B G	4.32	196.7 uS	4.33	189.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CQ6	10.60	N	CST	CLO O B G	4.07	210.8 uS	4.05	213.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CQ7	6.29	N	CST	CLO O B G	4.20	129.1 uS	4.27	127.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
CQ8	5.76	N	CST	CLO O B G	4.31	157.9 uS	4.29	158.0 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
CQ9	8.95	N	CST	CLO O B G	4.12	138.9 uS	4.10	139.0 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CQ10	24.37	Nil	CST	CLO O B G	4.20	177.9 uS	4.10	181.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
CQ11S	11.31	Nil	CST	CLO O B G	4.47	172.9 uS	4.48	173.3 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ11D	12.46	yes	CST	CLO O B G	4.47	188.6 uS	4.69	184.3 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
CQ12	4.05	N	CST	CLO O B G	3.88	162.0 uS	3.98	162.5 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CQ13	15.03	N	CST	CLO O B G	4.15	247.8 uS	4.12	247.7 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
CP3	9.46	N	CST	CLO O B G	4.34	166.2 uS	4.45	162.8 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP4	10.99		CST	CLO O B G					1x 250ml GP, 1x 500mL GP, 1RP	Pump Not Working
CP5	10.13	N	CST	CLO O B G	3.77	250.6 uS	3.82	252.4 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP6	11.84	N	CST	CLO O B G	3.44	207.6 uS	3.27	212.6 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP7	3.39	N	CST	CLO O B G	4.27	132.3 uS	4.30	131.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	
CP8	20.30	N	CST	CLO O B G	3.88	169.2 uS	3.36	165.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	
MW7	15.44	N	CST	CLO O B G	3.77	138.9 uS	3.91	134.9 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
MW8	7.44	N	CST	CLO O B G	3.98	100.2 uS	4.12	98.8 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
MW9	23.02	N	CST	CLO O B G	4.39	102.8 uS	4.56	98.1 uS	1x 250ml GP, 1x 500mL GP, 1RP	N
MW10	11.45	N	CST	CLO O B G	3.99	144.5 uS	4.00	145.2 uS	1x 250ml GP, 1x 500mL GP, 1RP	No Logger
MW13	7.73	N	CST	CLO O B G	4.08	120.1 uS	4.09	120.2 uS	1x 250ml GP, 1x 500mL GP, 1RP	
MW16	8.30	N	CST	CLO O B G	4.09	130.9 uS	4.27	126.6 uS	1x 250ml GP, 1x 500mL GP, 1RP	
MW17	10.03	N	CST	CLO O B G	4.91	137.9 uS	4.94	138.6 uS	1x 250ml GP, 1x 500mL GP, 1RP	

Turbidity: C=Clear, S=Slight, T=Turbid (CIRCLE)

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

pH/EC meter #: 12

Signed:

Sampled by: HAMISH & JILL

pH4 = 4.21 → 4.00 ✓
pH10 = 9.97 ✓
EC143 = 1412 ✓
EC2.76 = 2.69 ✓