



21 September 2016

Level 5, 21 Bolton Street
Newcastle NSW 2300
PO Box 506
Newcastle, NSW, 2300

Pere Riini
Quarry Manager
Hanson Construction Materials Pty Ltd
Level 5, 75 George Street
Parramatta, NSW 2150

T +61 (0)2 4927 0506
F +61 (0)2 4926 1312
E info@emmconsulting.com.au
www.emmconsulting.com.au

Re: Quarter 3 - 2016: East Guyong Quarry noise and blast monitoring

1 Introduction

EMM Consulting Pty Ltd (EMM) has been commissioned by Hanson Construction Materials Pty Ltd (NSW) (Hanson) to complete quarterly noise monitoring for the East Guyong Quarry, as required by the R. W. Corkery & Co Pty Limited, *Noise Management Plan for the East Guyong Quarry* 2013. The quarry is located approximately 22 km southeast of Orange, NSW.

The following material was referenced as part of this assessment:

- Environment Protection Authority (EPA), *Industrial Noise Policy* (INP) 2000;
- R. W. Corkery & Co Pty Limited (RWC), *Noise Management Plan for the East Guyong Quarry* (NMP) 2013;
- Department of Planning and Infrastructure (DP&I), *East Guyong Quarry Project Modification (06_0193 MOD 1)* approval (PA) 2012; and
- Australian and New Zealand Environment Council (ANZEC) 1990, *Technical basis for guidelines to minimise annoyance due to blasting overpressure and ground vibration*.


Analysis of data from two blast events that occurred on 2 August and 1 September 2016 has also been included in this report.

1.1 Technical terms

Several technical terms are discussed in this report. These are explained in Appendix A. It is also useful to have an appreciation of decibels, the unit of noise measurement. Table 1 provides an indication as to what an average person perceives about changes in noise levels. Examples of common noise levels are provided in Figure 1.

Table 1 Perceived change in noise

Change in level (dB)	Perceived change in noise
3	just perceptible
5	noticeable difference
10	twice (or half) as loud
15	large change
20	four times (or quarter) as loud

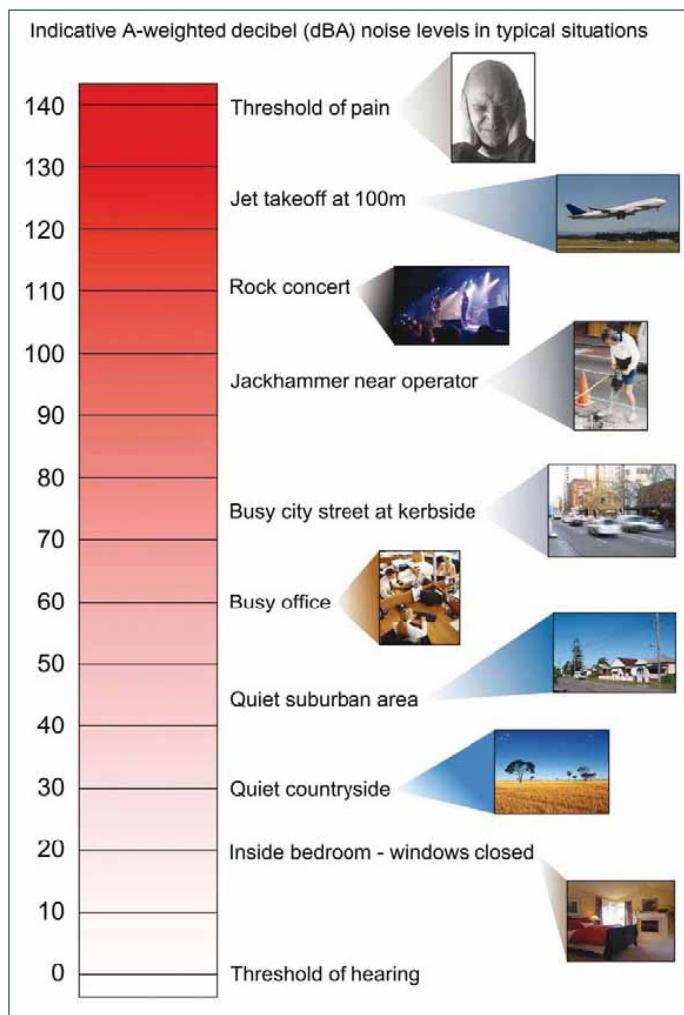

Source: NSW Road Noise Policy (DECCW, 2011).

Figure 1 Common noise levels

2 Methodology

2.1 Site operations

At the time of the attended noise monitoring on 6 September 2016, the quarry's activities comprised of the following:

- extraction of basalt using standard drill, load and haul techniques;
- processing of extracted basalt and stockpiling of material; and
- transportation of quarry products.

Material crushing and screening currently occurs on site from Monday to Thursday. This is an operational decision by the quarry and aids in the planning for maintenance and repairs. The quarry's approved hours of operation are:

- Monday to Friday (non-daylight savings) from 6 am to 6 pm;
- Monday to Friday (daylight savings) from 6 am to 8 pm; and
- Saturdays from 7 am to 1 pm.

2.2 Noise monitoring

Operator-attended 15-minute noise measurements were conducted when the quarry was in full operation at each location shown in Figure 2. The operator quantified the contribution of each significant quarry noise source where possible. Noise monitoring was conducted in accordance with the INP and Australian Standard AS 1055.1-1997 *Acoustics - Description and Measurement of Environmental Noise - General Procedures*.

A Brüel & Kjær 2250 Type 1 sound analyser (s/n 2759405) was used for the noise monitoring. The sound analyser was calibrated before and after the completion of the surveys using a Brüel & Kjær Type 4230 calibrator (s/n 1276091). The instruments were within a current NATA calibration period at the time of the noise monitoring and relevant certificates are provided in Appendix B.

2.3 Assessment locations

The noise monitoring included five 15 minute operator-attended noise measurements during the daytime period on 6 September 2016 to quantify noise emissions from the quarry at on-site locations N1 and N2, and at an additional location south of the quarry (refer to Figure 2). Noise monitoring was not conducted prior to 7 am as the quarry was not in operation.

Locations N1 and N2 are located near the south-east and north-east boundaries of the site respectively. Location N1 is approximately 500 m from "Wheatfields", the closest residence situated south-east of the quarry. Location N2 is approximately 150 m from "Hartley Cottage" situated north-east of the quarry. These monitoring locations were selected so as to not inconvenience residents and are consistent with the Noise Management Plan for the East Guyong Quarry (RWC, 2013). Monitoring at these locations, rather than at the residences, also provides a better opportunity to quantify site related noise since they are closer to the operations.

Noise monitoring was completed at an additional location south of the quarry (refer to Figure 2), This location represents the potentially worst affected residence to the South and was selected due to the northerly source to receiver winds present at the time of the measurements.

3 Criteria

3.1 Operational noise

Condition 3(5) of PA 06_0193 states that the noise assessment criteria are 35 dB $L_{Aeq(15-min)}$, at any residence for all assessment periods. The exception is the "Fairview" residence which has an 36 dB $L_{Aeq(15-min)}$, daytime criterion. In accordance with the PA 06_0193, "*Noise generated by the project is to be measured in accordance with the relevant requirements, and exemptions (including certain meteorological conditions), of the NSW Industrial Noise Policy.*"

As per Condition 3(5) of PA_0193, to demonstrate compliance at residential locations, the noise monitoring results are to be assessed against the following (intermediate) noise criteria for monitoring locations N1 and N2:

- N1 - 43 dB, $L_{Aeq(15-min)}$; and
- N2 - 50 dB, $L_{Aeq(15-min)}$.

It is stated in the NMP that by satisfying criteria at these intermediate locations, quarry noise at neighbouring residences would also satisfy residential criteria. This assumes the presence of soil and product stockpiles, bunding and intervening topography between the site and surrounding residences, which provide some degree of attenuation of site noise.

Further to the above, section 11.1.3 of the INP identifies that a development is deemed to be in non-compliance if the monitored noise levels from the development are more than 2 dB above the statutory limit.

3.2 Low frequency noise criteria

Section 11.2.3 of the NMP states that modification factors in Section 4 of the INP (EPA 2000) should be applied to the measured noise levels where applicable.

Section 4 of the INP (EPA 2000) provides guidelines for applying 'modifying factor' adjustments to account for low frequency noise emissions. The INP requires that where there is a difference of 15 dB or more between site 'C-weighted' and site 'A-weighted' noise emission levels, a correction factor of 5 dB is added to the measured site noise level before comparison to the relevant noise criterion. Hence, where possible throughout each survey the operator has estimated the difference between site 'C-weighted' and site 'A-weighted' noise emission levels by matching audible sounds with the response of the analyser ($L_{Ceq}-L_{Aeq}$ noise metric). Where relevant, this guideline has been applied to this assessment as presented in Section 4.

It is noted that the NSW DP&E and the NSW EPA are currently completing a comprehensive study of low frequency noise (LFN) as part of the INP review. Additionally, it is acknowledged that assessment of LFN in rural areas is difficult and that current assessment processes make it difficult to enforce LFN criteria as part of consent conditions. The draft Industrial Noise Guideline (ING) will replace the INP and is the first official publication that clearly indicates a change from the current INP approach.


3.3 Blast monitoring

Blast overpressure and vibration monitoring is managed by Hanson for all blast events. Blast overpressure and ground vibration are monitored at four locations within or at the site's boundary. The exception is B4, located south of the Mitchell Highway near the Fairview property. Monitoring locations are situated closer to blasting locations than the residential structures (refer to Figure 2), and therefore overpressure and vibration levels would likely be lower at the actual residential dwellings than those measured.

Blast emissions criteria for the quarry apply at any residence on privately-owned land surrounding the site and are presented in Table 2.

Table 2 Blast overpressure and vibration criteria

Location	Airblast overpressure criteria (dB (Linear Peak))	Ground vibration criteria (mm/s)	Allowable exceedance
Any privately-owned residence surrounding the site.	115	5	5% of the total number of blasts in a 12 month period
	120	10	0%

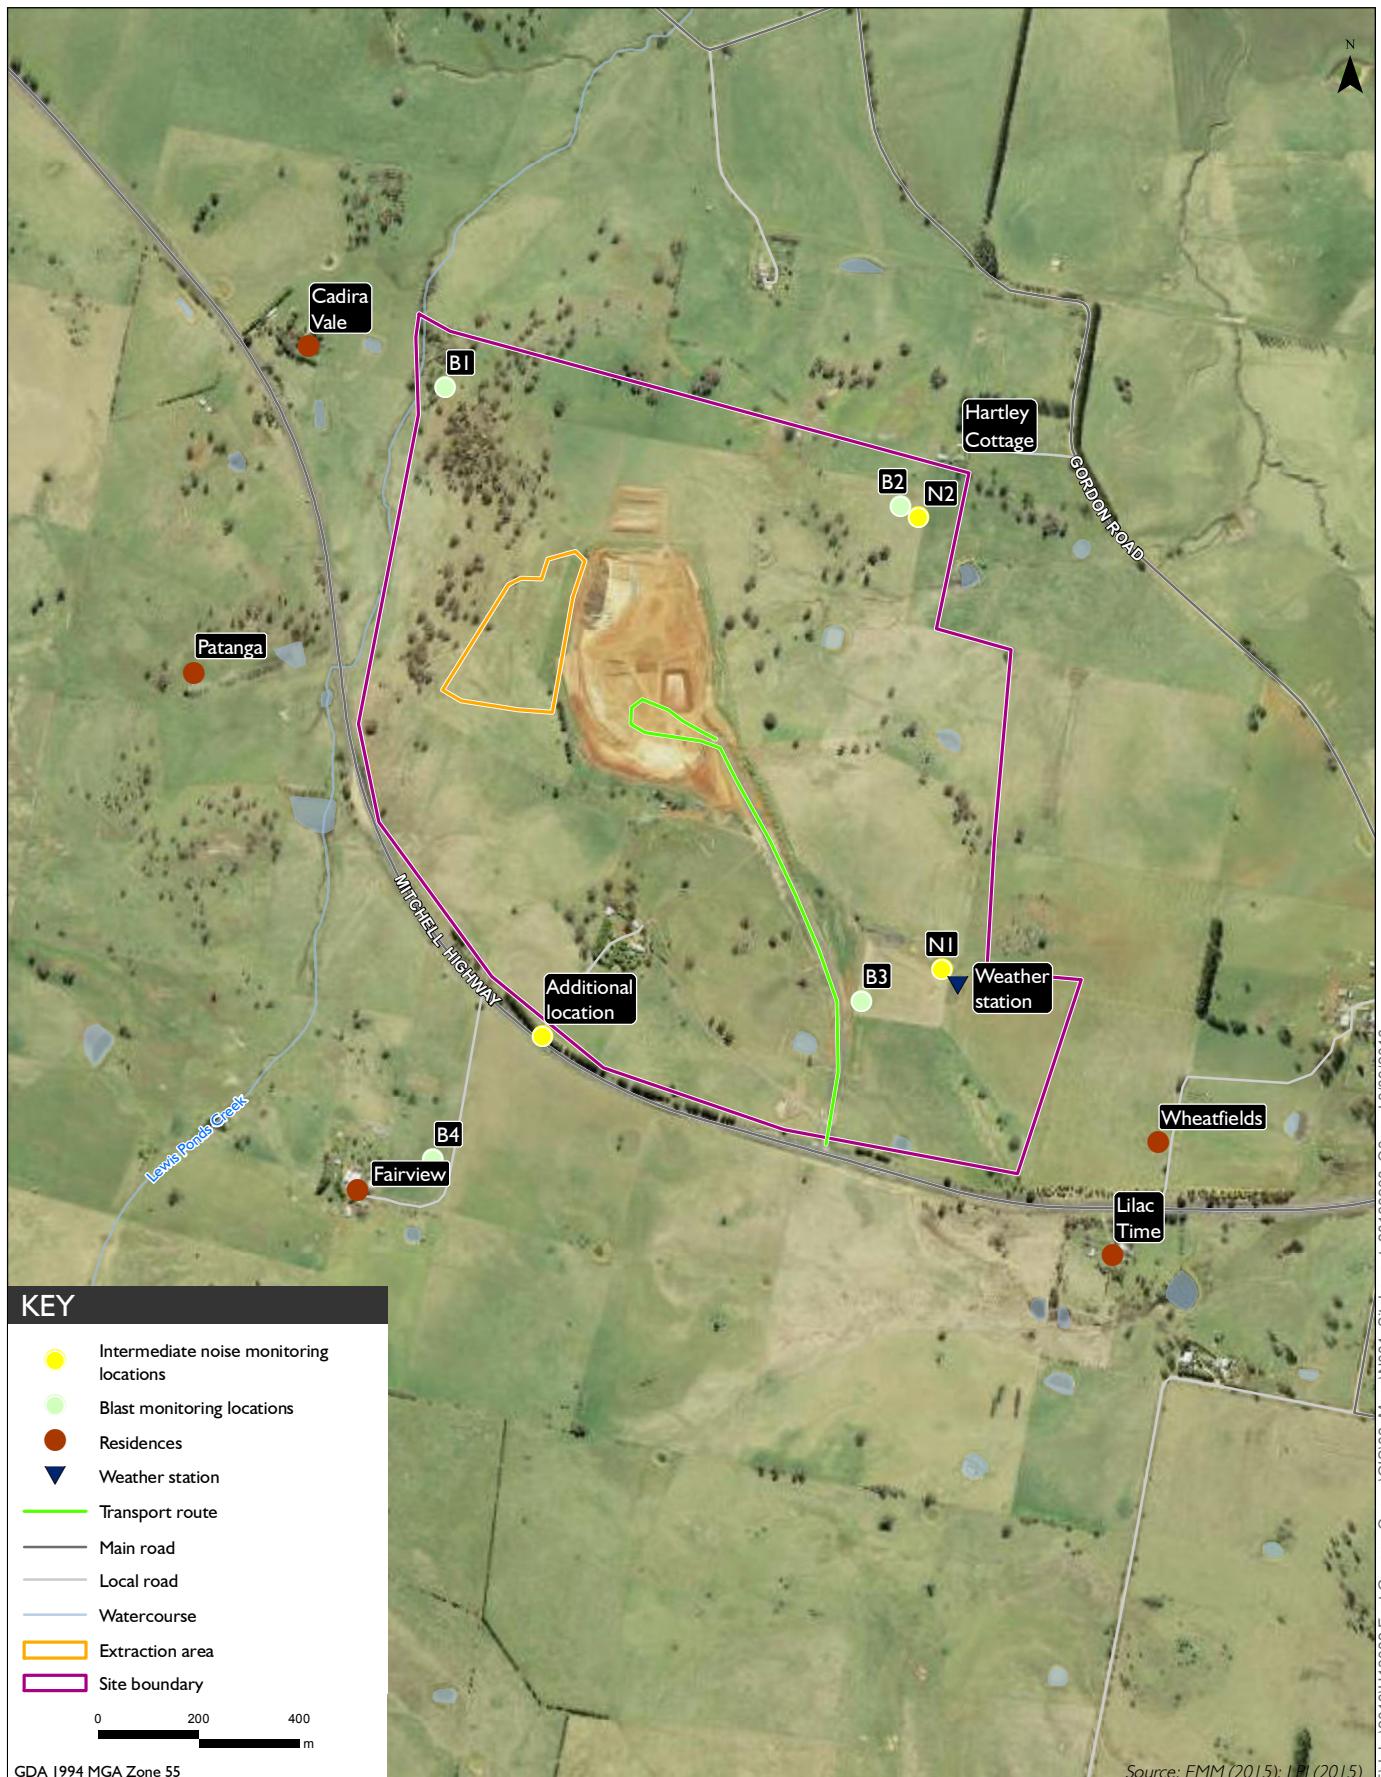

Site location and monitoring plan

East Guyong Quarry

Quarter 3 – 2016: East Guyong Quarry noise and blast monitoring

Figure 2



4 Results

4.1 Noise monitoring results

Noise monitoring results for locations N1 and N2 and the additional location are presented in Table 3. Data recorded by the site's weather station was used to identify weather conditions during the monitoring period and to determine the applicability of noise limits. Wind speed and direction observations are presented in Table 3.

Wind speed averages were below 3 m/s (at 10 m above ground) during all measurements; hence noise limits were applicable. It is noted that during the final measurement, taken at the additional location, winds were in the direction of source to receiver (ie northerly winds), and therefore would have enhanced site noise levels at this location.

Low frequency noise was identified for all measurements at locations N1 and N2 and a penalty of 5 dB was added to the respective quarry $L_{Aeq(15-min)}$ contributions in accordance with Chapter 4 of the INP (EPA 2000). It is noted that the crushing plant was in operation for the duration of all measurements.

All quarry contributions measured at locations N1 and N2 satisfied the relevant noise criteria as per the NMP. It is therefore predicted that relevant criteria for surrounding residential receivers would also be satisfied.

The measured quarry $L_{Aeq(15-min)}$ contribution at the additional location was estimated to be 42 dB or less. Adopting distance attenuation, the calculated noise level at 'Fairview' based on the measured level at the additional location is 38 dB $L_{Aeq,15min}$. This level is within 2 dB of the noise criteria at 'Fairview' and is therefore within an acceptable measurement tolerance as described in Section 11.1.3 of the INP (EPA 2000). It is noted that during the measurement taken at the additional location, winds were in the direction of source to receiver (ie northerly winds), and therefore would have enhanced site noise levels at this location.

Based on the preceding information, there were no non-compliances from the quarry at all assessment locations as per Condition 3(5) of PA_0193.

Table 3 Attended noise monitoring summary – 6 September 2016

Location	Start time	Attended noise monitoring results dB					Criteria dB	Meteorological conditions ¹		Comments
		Total measured		Site contribution				Wind speed (m/s)	Wind direction (degrees from North)	
		L _{Aeq}	L _{Max}	L _{A90}	Est. L _{C-A}	L _{Aeq}				
N1	08:29	41	54	37	≥15	<43 ² (<38+5)	43	1.2	357	Site audible (predominantly crushing plant and engine revs). Other sources include frequent bird noise and road traffic noise from Mitchell Highway and occasional livestock noise.
N2	08:52	43	58	38	≥15	47 ² (42+5)	50	2.1	356	Site audible (predominantly crushing plant, reversing alarms and engine revs). Other sources included consistent insects, frequent bird and livestock noise, occasional road traffic noise from the Mitchell Highway and a helicopter.
N2	09:08	43	69	38	≥15	46 ² (41+5)	50	2.5	354	Site audible (predominantly crushing plant, reversing alarms and engine revs). Other sources included consistent insects and frequent bird noise.
N1	09:40	42	64	37	≥15	43 ² (38+5)	43	2.6	22	Site audible (predominantly crushing plant and drill). Other sources included frequent bird noise, occasional livestock noise and road traffic noise from the Mitchell Highway.
Additional location ³	10:02	69	89	44	n/a	≤42	n/a	2.9	16	Site audible (predominantly crushing plant and drill) between breaks in road traffic. Other sources included dominant car/truck pass-bys on Mitchell Highway and consistent bird noise.

Notes: 1. Meteorological data was obtained from the site weather station at a height of 10 m above ground.

2. Modifying factor for low frequency noise applicable in accordance with section 4 of the INP (difference of 15 decibels or more between site 'C-weighted' and site 'A-weighted' noise levels).

3. Additional monitoring location south of the quarry (refer to Figure 2).

4. IA = inaudible.

4.2 Blast overpressure and ground vibration

Two blast events occurred at the quarry since the last quarterly monitoring in May 2016. The blast overpressure and vibration monitoring results are presented in Table 4, which satisfy the relevant criteria at all monitoring locations (refer to Figure 2).

Table 4 Blasting and vibration monitoring results

Date	Monitoring location	Airblast overpressure level (dB(Linear Peak))		Ground vibration - Peak particle velocity (mm/s)	
		Measured	Criteria	Measured	Criteria
2/8/16	B1 ¹	-	115	-	5
	B2	110	115	1.29	5
	B3	110	115	0.79	5
	B4	115	115	1.50	5
1/9/16	B1 ¹	-	115	-	5
	B2	91	115	0.83	5
	B3 ¹	-	115	-	5
	B4 ¹	-	115	-	5

Notes: 1. The trigger was not activated for this blasting event.

5 Conclusion

EMM has completed a noise assessment of East Guyong Quarry operations at two monitoring locations within the site's boundary on 6 September 2016 as required by the site's NMP. Attended monitoring was also completed at an additional location to quantify site noise at residences to the south of the quarry.

The results demonstrate that the received site noise levels at all on-site monitoring locations satisfy the relevant noise criteria as per the PA_0193 and in accordance with the NMP for the East Guyong Quarry.

The calculated quarry L_{Aeq(15-min)} contribution at the 'Fairview' residence is 38 dB L_{Aeq,15min}. This level is within 2 dB of the noise criteria at 'Fairview' and is therefore within an acceptable measurement tolerance as described in Section 11.1.3 of the INP (EPA 2000). It is noted that during the measurement taken at the additional location, winds were in the direction of source to receiver (ie northerly winds), and therefore would have enhanced site noise levels at this location.

Blast overpressure and ground vibration monitoring results satisfied the relevant criteria at all monitoring locations for the two blast events relevant to Quarter 3, 2016.

Yours sincerely,

Lucas Adamson
Acoustic Consultant
ladamson@emmconsulting.com.au
Review: NI (20/9/2016)

Appendix A

Glossary of acoustic terms

Table A1 **Glossary of acoustic terms**

Term	Description
dB	Noise is measured in units called decibels (dB).
A-weighting	There are several scales for describing noise, the most common being the 'A-weighted' scale. This is an adjustment made to sound-level measurement to approximate the response of the human ear.
C-weighting	This is an adjustment made to sound-level measurements which takes account of low-frequency components of noise within the audibility range of humans.
L_{90}	Commonly referred to as the background noise level. The noise level exceeded 90% of the time.
L_{eq}	The energy average noise from a source. This is the equivalent continuous sound pressure level over a given period. The $L_{Aeq(15-min)}$ descriptor refers to an L_{Aeq} noise level measured over a 15 minute period.
L_{max}	The maximum root mean squared sound pressure level received during a measuring interval.
Day period	Monday – Saturday: 7 am to 6 pm, on Sundays and Public Holidays: 8 am to 6 pm.
Evening period	Monday – Saturday: 6 pm to 10 pm, on Sundays and Public Holidays: 6 pm to 10 pm.
Night period	Monday – Saturday: 10 pm to 7 am, on Sundays and Public Holidays: 10 pm to 8 am.

Appendix B

Calibration certificates

CERTIFICATE OF CALIBRATION

Certificate No: CAU1600070

Page 1 of 10

CALIBRATION OF:

Sound Level Meter:	Brüel & Kjær	2250	No: 2759405
Microphone:	Brüel & Kjær	4189	No: 2888134
Preamplifier:	Brüel & Kjær	ZC-0032	No: 16037
Supplied Calibrator:	Brüel & Kjær	4230	No: 1276091
Software version:	BZ7222 Version 3.5.3	Pattern Approval:	Pending
Instruction manual:	BE1712-18	Identification:	N/A

CUSTOMER:

EMM Consulting
Level 5, 21 Bolton Street
Newcastle NSW 2300

CALIBRATION CONDITIONS:

Preconditioning:	4 hours at 23 °C
Environment conditions:	<i>see actual values in Environmental conditions sections</i>

SPECIFICATIONS:

The Sound Level Meter has been calibrated in accordance with the requirements as specified in IEC61672-3:2006 class 1. Procedures from IEC 61672-3:2006 were used to perform the periodic tests.

PROCEDURE:

The measurements have been performed with the assistance of Brüel & Kjær Sound Level Meter Calibration System B&K 3630 with application software type 7763 (version 5.1 - DB: 5.10) and test procedure 2250-4189.

RESULTS:

	Initial calibration		Calibration prior to repair/adjustment
X	Calibration without repair/adjustment		Calibration after repair/adjustment

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k = 2$ providing a level of confidence of approximately 95 %. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the device under calibration.

Date of Calibration: 03/02/2016

Certificate issued: 03/02/2016



Sajeeb Tharayil
Calibration Technician


Jan Rasmussen
Approved signatory

CERTIFICATE OF CALIBRATION

No.: CAU1600071

CALIBRATION OF:

Calibrator: Brüel & Kjær 4230 No: 1276091
Identification: Sound Level Calibrator
IEC Class: 2

CUSTOMER:

EMM Consulting
Level 5
21 Bolton Street
Newcastle NSW 2300

CALIBRATION CONDITIONS:

Preconditioning: 4 hours at 23 °C
Environment conditions: Air temperature: 24.3 °C
Air pressure: 100.1 kPa
Relative Humidity: 56.3 %RH

SPECIFICATIONS:

The acoustic calibrator has been calibrated in accordance with the requirements as specified in IEC60942.

PROCEDURE:

The measurements have been performed with the assistance of Brüel & Kjær acoustic calibrator calibration application software Type 7794 using calibration procedure 4230 Complete

RESULTS:

- | | |
|---|---|
| <input type="checkbox"/> Initial Calibration | <input type="checkbox"/> Calibration before repair/adjustment |
| <input checked="" type="checkbox"/> Recalibration without repair/adjustment | <input type="checkbox"/> Calibration after repair/adjustment |

The reported expanded uncertainty is based on the standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95%. The uncertainty evaluation has been carried out in accordance with EA-4/02 from elements originating from the standards, calibration method, effect of environmental conditions and any short time contribution from the calibrator under calibration.

Date of Calibration: 03/02/2016

Certificate issued: 03/02/2016


Jan Rasmussen

Approved Signatory