



Carbon Based Environmental Pty Limited

ABN 74 102 920 285

Rocla Quarry Products Calga Quarry

Environmental Monitoring

Dust Deposition Gauges, Surface and Ground Waters and Meteorological Station

June 2013

A handwritten signature in black ink, appearing to read 'Colin Davies'.

Colin Davies BSc MEIA CENVP
Environmental Scientist
Date: 23 July 2013

Executive Summary

Carbon Based Environmental is contracted by Rocla Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- Dust Deposition Gauges;
- Surface Waters;
- Groundwaters; and
- Meteorological Station.

This report was prepared by Carbon Based Environmental and includes the following;

- Dust Deposition results for June 2013;
- Surface Water quality results for June 2013;
- Groundwater depth and quality results for June 2013; and
- Meteorological report for June 2013.

The June 2013 dust deposition results for insoluble solids were generally low and free of major contamination this month. All sites, on a rolling annual average basis, are currently below the Air Quality Management Plan exceedance level of 3.7g/m².month. Results were found to be representative of dust levels as determined by the Australian Standard.

Surface water samples were collected at sites A, B, D, and F. Sites C and E were inaccessible and unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the acidic to neutral range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any site.

Groundwaters were sampled for normal monthly monitoring on 3 and 4 July 2013. Groundwater depth generally decreased across the sampled groundwater bores when compared to last month. Exceptions were CQ1, CQ6, CQ10, CP5, CP6, and MW9 which increased in depth. Groundwater pH and EC were generally stable this month.

The meteorological station data recovery for the month was approximately 100%. Recorded rainfall on site for June was 120.2 mm, which was slightly higher than the Peats Ridge long-term average for June. A comparison is shown below:

Rocla Calga Quarry	120.2 mm
BOM Peats Ridge*	NA
BOM Gosford*	NA
BOM Peats Ridge Long term mean for June*	105.9 mm

NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au). No data was available from the BOM Gosford station for June 2013

Note: Differences in the daily rainfall readings between BOM and the Rocla station may occur due to BOM stations reporting rainfall at 9am and the Rocla station recording rainfall at midnight.

1.0 Sampling Program

Rocla Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. Carbon Based Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. Carbon Based Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 “Methods for Sampling and Analysis of Ambient Air Method 10.1 Determination of Particulates—Deposited Matter—Gravimetric Method”. Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m².month.

Surface waters are sampled in accordance with Australian Standards AS5667.1 “Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples”, AS5667.6 “Water Quality Sampling—Guidance on sampling of rivers and streams” and AS5667.4 “Water Quality Sampling—Guidance on sampling from lakes, natural and man-made”. Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards AS5667.1 “Guidance on the Design of Sample Programs, Sampling Techniques and the Preservation and Handling of Samples” and AS5667.11 “Water Quality Sampling—Guidance on sampling of ground waters”. Groundwater monitoring sites are sampled at least bi-monthly for water quality and at least quarterly for water level. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real time display. Wind parameters are measured according to Australian Standard AS 2923 “Ambient Air— Guide for Measurement of Horizontal Wind for Air Quality Applications”.

The weather stations have the following sensor configuration;

Air temperature

- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

Carbon Based Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

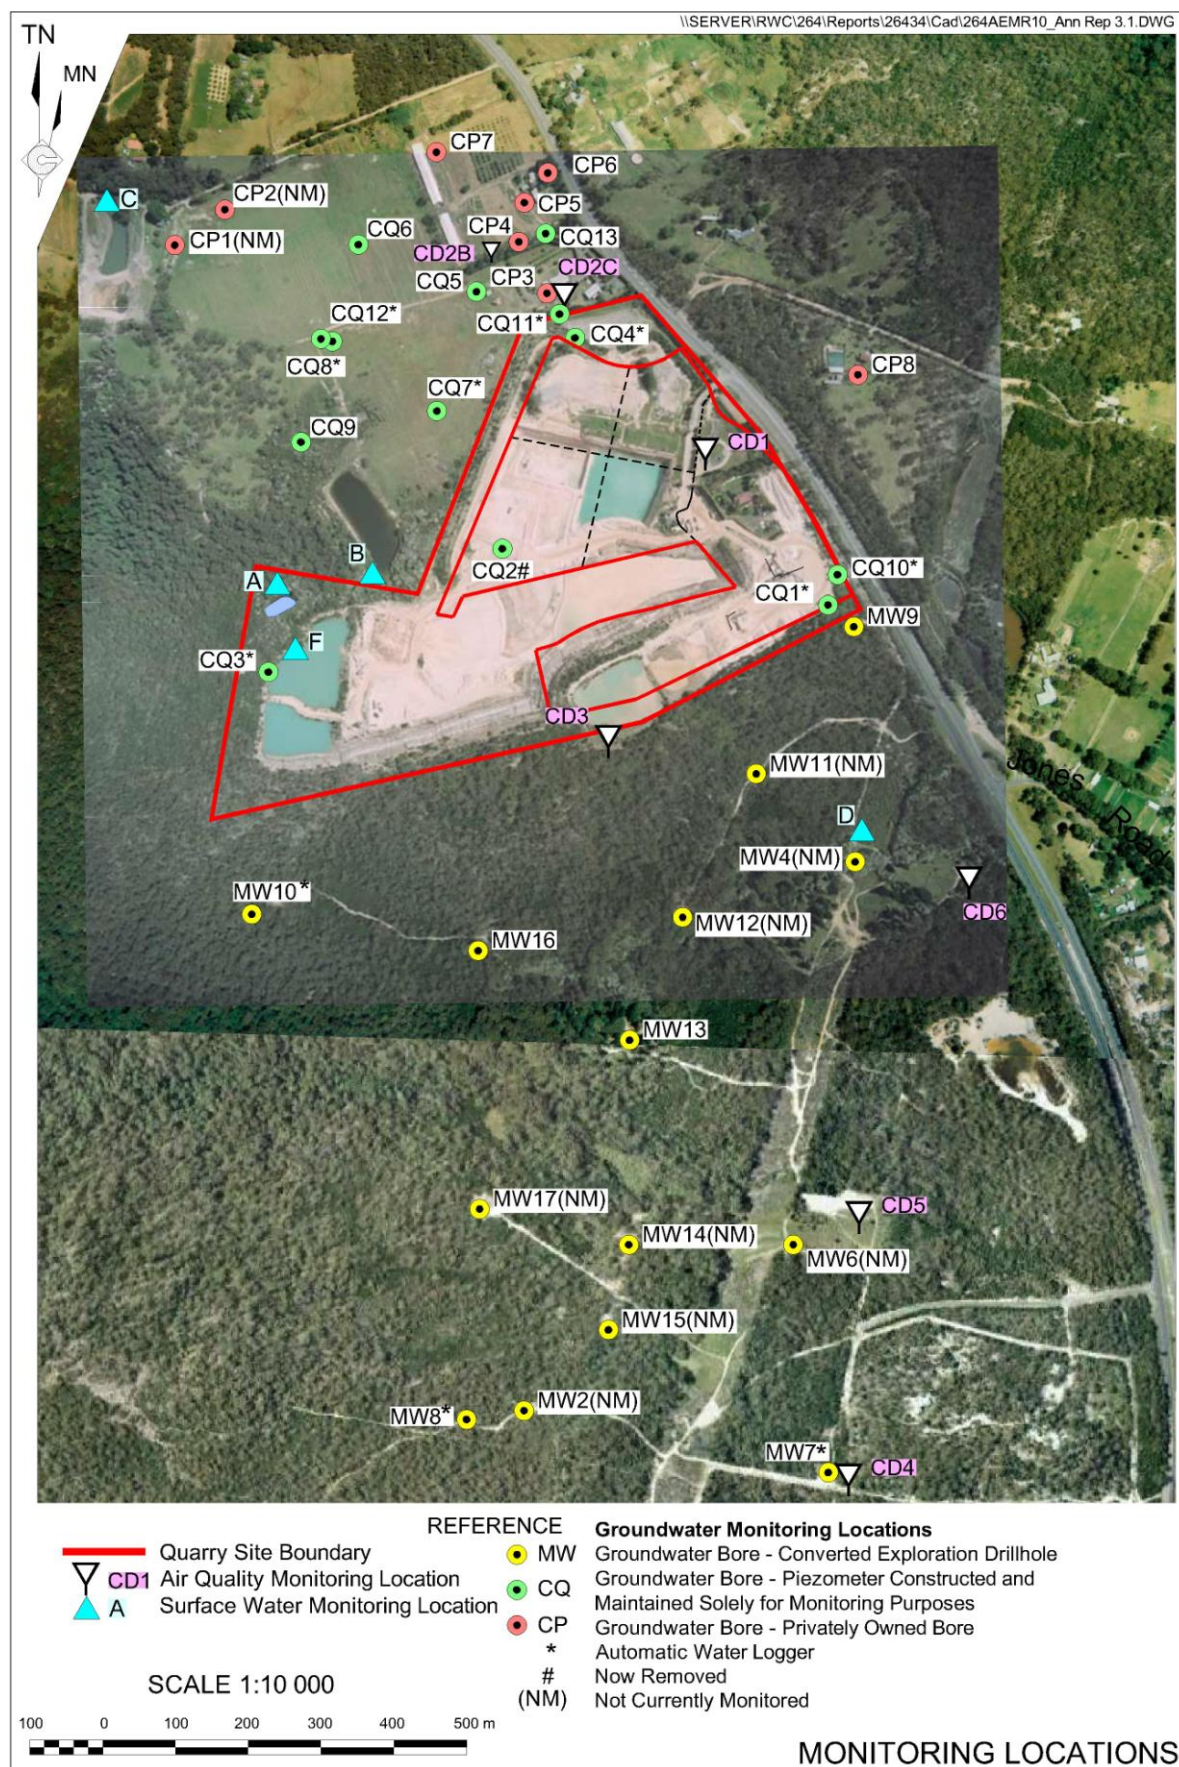


Figure 1: Rocla Calga Quarry environmental monitoring locations

2.0 Monthly Results

2.1 Dust Deposition Gauges

Table 1 displays the results for June 2013 and the project 12 month rolling average. Results are in g/m².month.

Table 1: Dust Deposition results: 3 June 2013 – 3 July 2013 (30 days)

Site	Monthly Insoluble Solids g/m ² .month	Monthly Ash Residue g/m ² .month	Monthly Combustible Matter g/m ² .month	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids g/m ² .month
CD1	0.5	0.1	0.4	20	1.4
CD2c	0.8	0.2	0.6	75	0.9
CD3	0.6	0.1	0.5	83	1.3
CD4	0.4	0.1	0.3	75	0.4
CD5	0.5	0.1	0.4	80	0.4
CD6	0.6	0.2	0.4	66	0.5


Insoluble Solids marked with an * indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m².month; the Development Consent's annual average amenity criteria at residential locations. The current rolling annual average is calculated from July 2012 to June 2013.

NA= Not Available.

CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The laboratory analysis is provided in **Appendix 1**.

Figure 2: Dust Deposition Charts

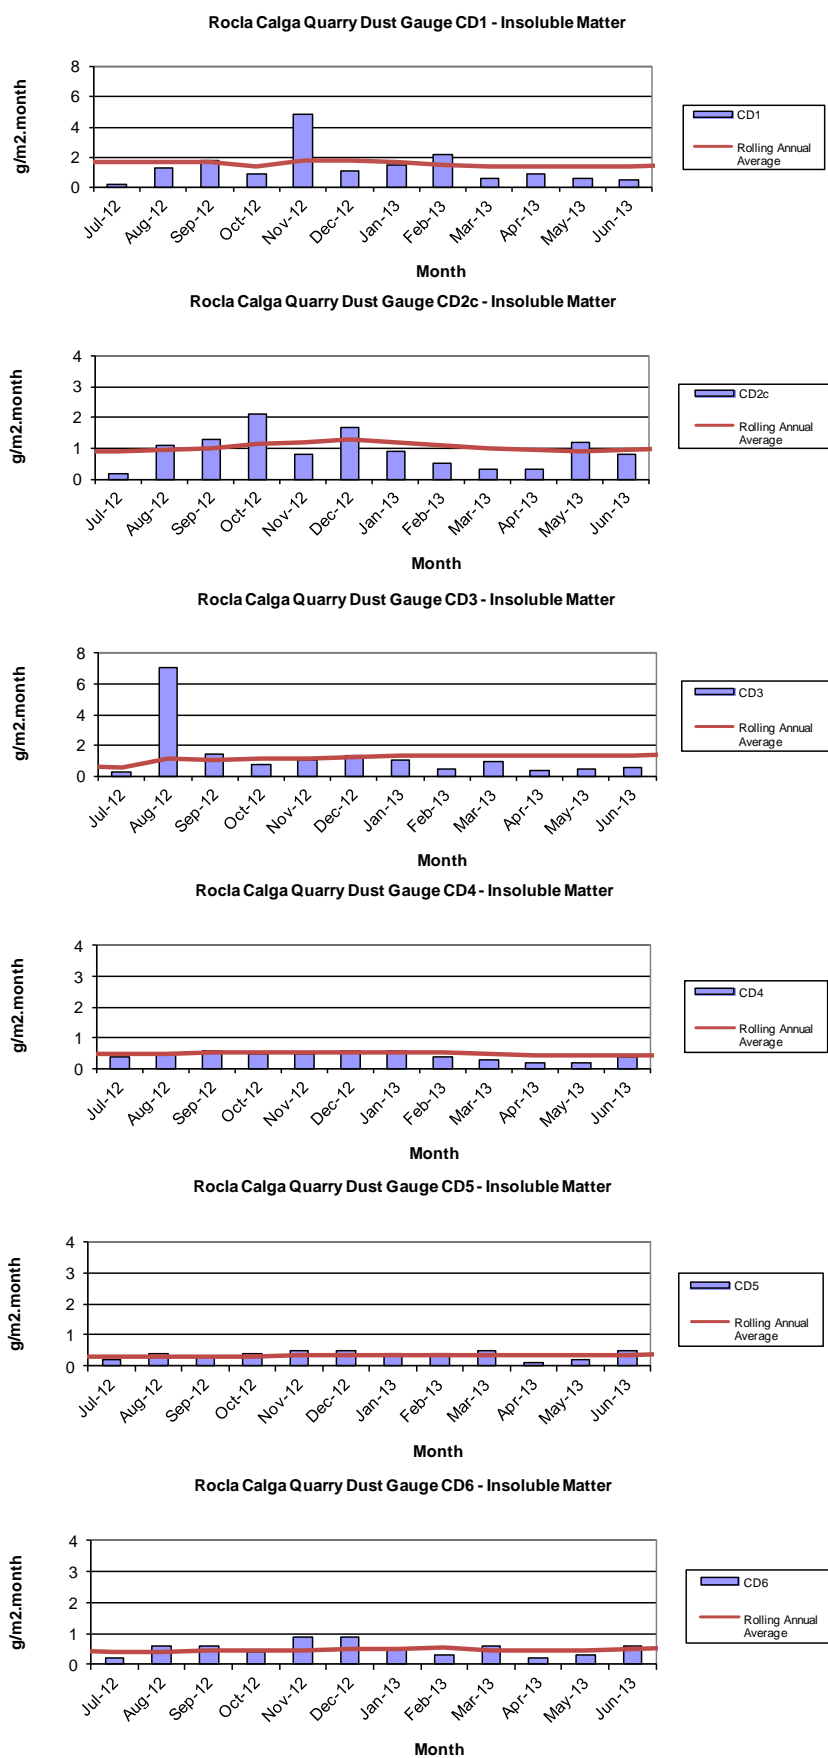

2.2 Surface Water Monitoring

Monthly surface water monitoring was conducted on the 3 and 4 July 2013 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

Table 2: Monthly surface water monitoring – May grab sample results

Site	Observed Flow Rate	Water Colour	Turbidity	pH	EC (µS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
A	NR	NR	NR	5.99	64	30	<5	<5
B	Fast	Clear	Clear	5.12	68	40	17	<5
C	No access							
D	Still	Clear	Clear	5.41	76	44	<5	<5
F	Dam	Clear	Clear	5.46	61	32	<5	<5

Samples were collected at sites A, B, D and F. Site C was inaccessible and unable to be sampled this month. The samples were collected and analysed for a monthly sampling event. Results show pH within the acidic to neutral range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any site.

2.3 Groundwater Monitoring

Groundwaters were sampled on 3 and 4 July 2013. Water quality tests for pH and electrical conductivity were conducted by Carbon Based Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and Electrical Conductivity (+/- 5%) was obtained between samples. Data is displayed in **Table 3** and **Figures 3 to 6**.

Groundwater depth increased at sites CQ1, CQ6, CQ10, CP5, CP6, and MW9 when compared to last month, indicating water generally moved away from the surface. All other sites showed a decrease in depth, indicating water moved towards the surface.

pH at all sites is in the acidic to neutral range. pH remained stable across all sampled sites with the exception of CQ4, CQ8, CQ13, CP5, CP6, and CP7 which decreased in pH. EC levels were generally stable compared to the results obtained in May 2013.

Table 3: Groundwater Quality Data

Reference	Bore	Type	Depth to water TOC (m) April 06	Depth to water TOC (m) This report	pH This report	Electrical Conductivity (µS/cm) This report
CQ1	Voutos	* Monitor	20.59	0.66	6.86	182.4
CQ3	Voutos	* Monitor	10.53	NM	NM	NM
CQ4	Voutos	* Monitor	8.78	9.76	3.86	90.2
CQ5	Gazzana	DIP Only	8.69	5.50	4.09	146.2
CQ6	Gazzana	DIP Only	16.00	9.89	5.19	146.9
CQ7	Gazzana	* Monitor	6.89	5.66	4.43	95.0
CQ8	Gazzana	* Monitor	11.03	5.05	3.90	141.6
CQ9	Gazzana	DIP Only	10.10	8.47	4.02	109.1
CQ10	Voutos	* Monitor	NI	22.42	4.49	176.6
CQ11S	Gazzana	* Monitor	NI	9.83	4.65	167.0
CQ11D	Gazzana	* Monitor	NI	11.04	4.92	157.2
CQ12	Gazzana	* Monitor	NI	3.38	3.92	130.5
CQ13	Kashouli	* Monitor	NI	12.01	3.57	225.5
CP3	Gazzana	Domestic	10.40	8.23	5.00	146.9
CP4	Kashouli	Domestic	13.63	5.61	4.55	174.6
CP5	Kashouli	Domestic	16.61	26.43	3.58	235.0
CP6	Kashouli	Domestic	16.27	13.56	3.50	187.6
CP7	Kashouli	Production	8.56	1.20	3.94	147.4
CP8	Rozmanec	Domestic	22.17	NM	NM	NM
MW7	Rocla Bore	* Monitor	15.76	14.39	4.42	113.7
MW8	Rocla Bore	* Monitor	9.82	6.57	4.52	83.2
MW9	Rocla Bore	* Monitor	22.44	21.63	4.11	87.7
MW10	Rocla Bore	* Monitor	15.41	NM	NM	NM
MW13	Rocla Bore	DIP Only	NI	NM	NM	NM
MW16	Rocla Bore	DIP Only	NI	NM	NM	NM

Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to access restrictions.

NR = Not Required by resident.

* = Logger Installed.


NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.

Shading is used to indicate the following trends in water depth (compared to the last reading):


	Increase to ground water depth (water moved away from surface)
	Decrease to ground water depth (water moved towards surface)
	Stable water depth (+/- 0.01m)

Available groundwater loggers were downloaded and will be forwarded to the Rocla Calga Quarry groundwater consultant.


Figures 3 to 6: Groundwater Depth Charts.

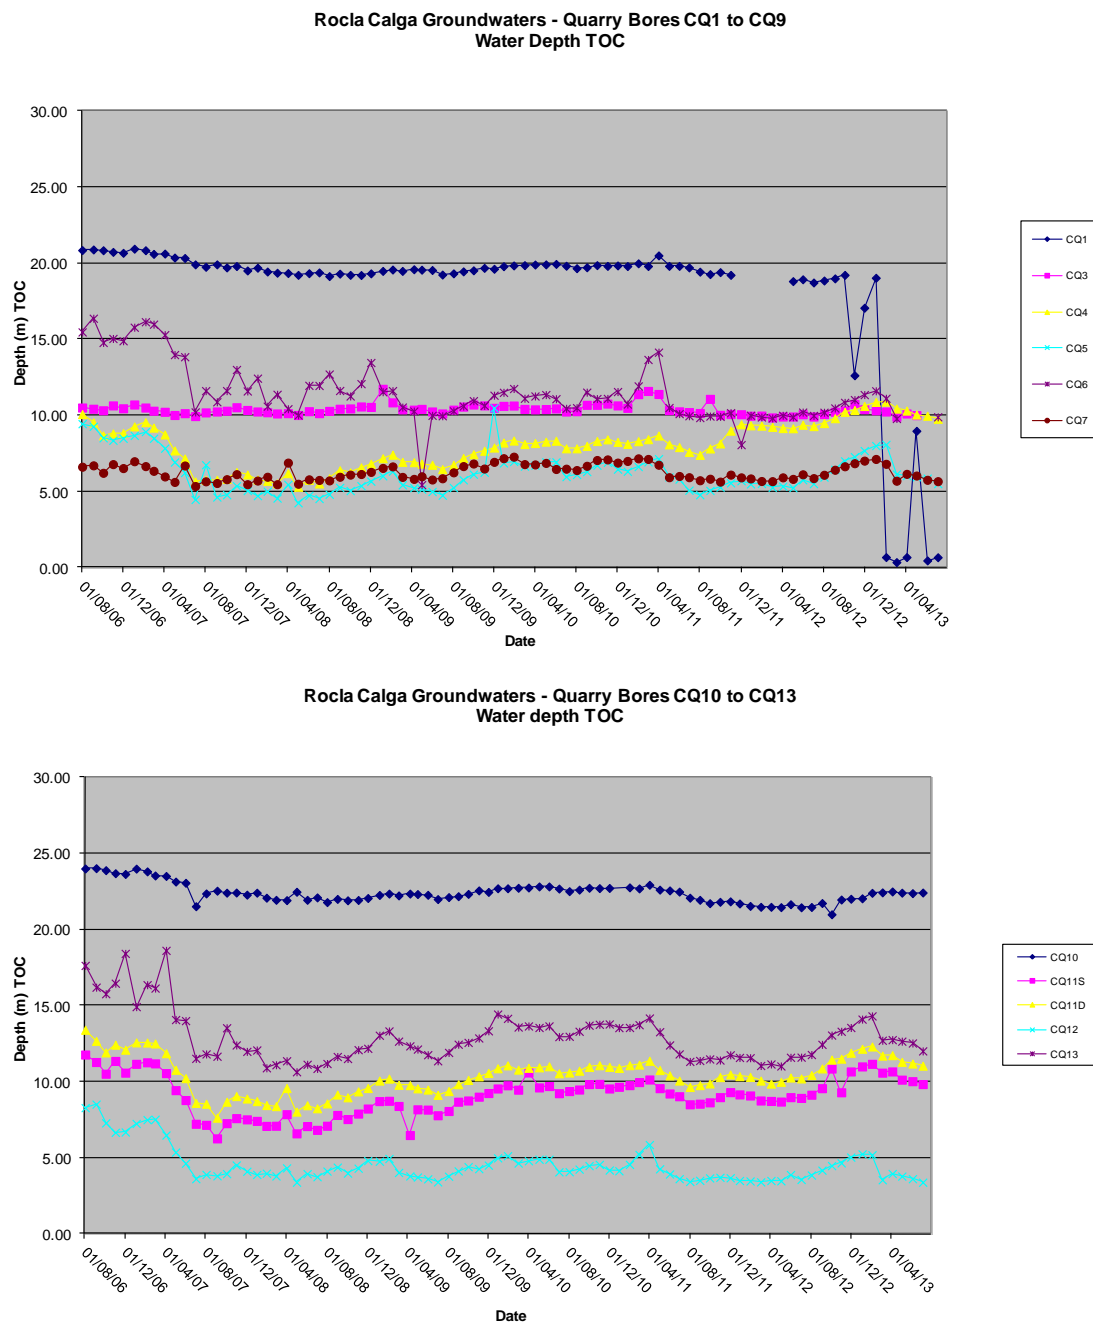

Rocla Calga Groundwaters - Quarry Bores CP3 to CP8
Water Depth TOC

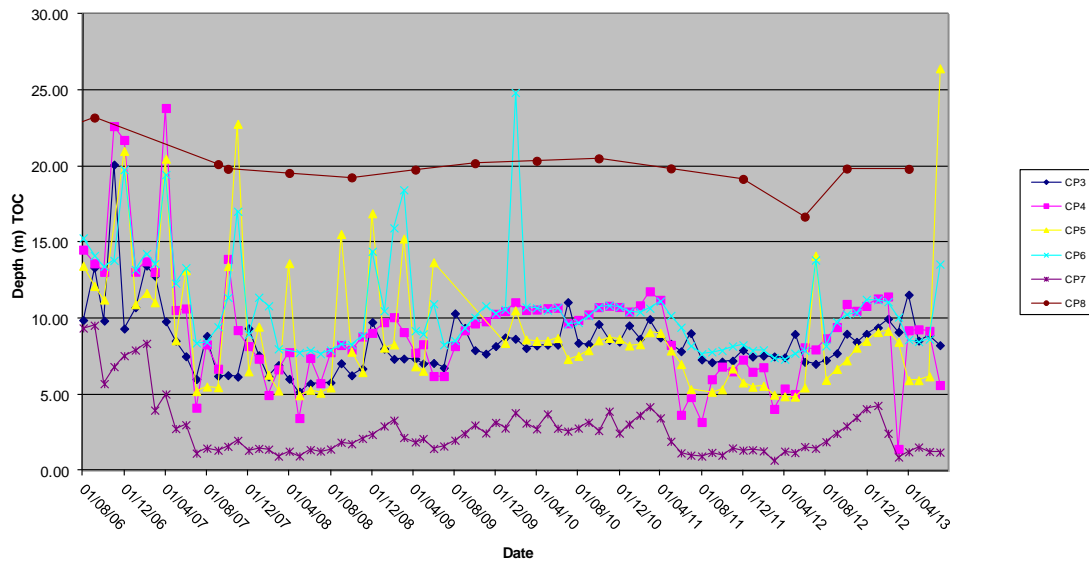

Rocla Calga Groundwaters - Quarry Bores MW7 to MW16
Water Depth TOC

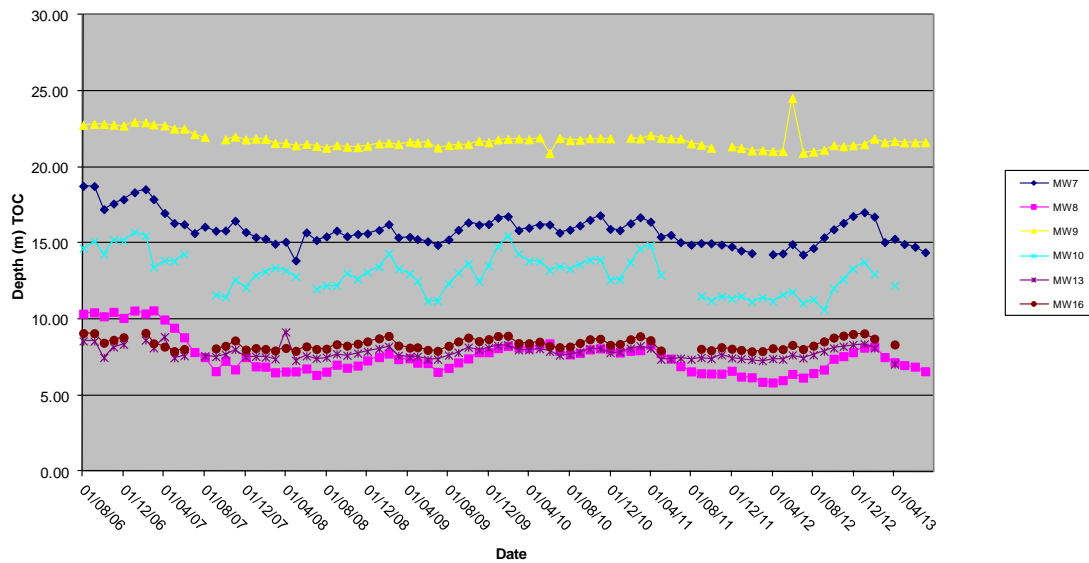

2.4 Meteorological Monitoring

The Rocla Calga Quarry weather station data recovery in June was approximately 100%. The weather station data follows and includes;

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

Monthly weather statistics from the nearby Bureau of Meteorology (BOM) Gosford and Peats Ridge stations were unavailable for June 2013.

Data for June 2013 shows that rainfall recorded at the Rocla Calga Quarry was higher than the Peats Ridge long term mean rainfall for June. The rainfall comparison is provided below:

Rocla Calga Quarry	120.2 mm
BOM Peats Ridge*	NA
BOM Gosford*	NA
BOM Peats Ridge Long term mean for June*	105.9 mm

NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).


Results are displayed in the following table and figures.




2.4.1 Monthly Meteorological Data Summary




Summary Jun-13 Rocla - Calga

Date	Min Temp	Av Temp	Max Temp	Min %RH	Av %RH	Max %RH	RAIN mm	ET mm	Min WS	Av WS	Max WS	Min wind chill	Max Heat index	Min Atm P	Av Atm P	Max Atm P	Min Solar Rad	Av Solar Rad	Max Solar Rad	Min Data %	Av data %	Max Data %
1/06/2013	13.7	15.6	19.4	71	84	94	3.0	1.3	0.4	3.0	10.7	12.7	19.6	1009.7	1016.3	1021.7	0	40.4	242	91.5	98.9	100
2/06/2013	10.3	12.8	14.7	75	89	97	20.0	0.8	0.4	4.4	19.7	7.5	14.8	1004.0	1009.4	1016.6	0	15.1	162	91.8	97.8	100
3/06/2013	7.2	11.9	17.4	56	71	93	0.0	2.0	0	3.2	13	7.3	16.7	1016.4	1019.2	1022.9	0	70.6	530	91.5	98.9	100
4/06/2013	7.0	12.1	19.6	64	83	95	0.0	1.4	0	1.6	5.8	5.6	19.4	1022.8	1024.2	1026.0	0	75.6	524	94.7	99.4	100
5/06/2013	8.6	13.0	18.4	74	88	97	0.2	1.0	0	1.0	6.7	8.7	18.7	1021.1	1023.3	1025.4	0	57.0	429	88.6	99.0	100
6/06/2013	12.6	15.6	18.1	68	76	82	0.0	1.3	0.9	2.3	7.2	12.1	17.9	1019.2	1021.0	1022.7	0	43.6	214	93	99.8	100
7/06/2013	12.3	17.0	21.2	70	79	85	0.0	1.6	0.4	3.0	8.9	12.1	21.4	1016.7	1019.7	1025.5	0	53.0	399	92.1	99.9	100
8/06/2013	11.7	13.7	17.6	70	85	95	0.2	1.0	0	0.9	6.7	11.7	17.3	1025.5	1028.0	1030.4	0	48.6	294	91.2	98.7	100
9/06/2013	9.2	13.1	19.3	70	89	96	0.0	0.8	0	0.7	6.3	9.2	19.5	1022.0	1025.0	1027.8	0	46.7	378	99.7	100.0	100
10/06/2013	9.2	13.3	20.7	67	91	97	0.4	0.8	0	1.7	8.5	9.2	20.7	1017.7	1019.6	1021.6	0	46.6	489	100	100.0	100
11/06/2013	9.7	13.3	21.1	59	88	97	0.2	1.1	0	1.2	5.4	9.3	20.5	1016.3	1018.0	1020.2	0	67.1	477	90.1	99.4	100
12/06/2013	9.1	11.9	15.4	93	96	98	13.0	0.4	0	1.6	9.4	9.2	15.3	1007.9	1011.7	1016.1	0	24.2	356	82.7	97.7	100
13/06/2013	11.4	13.8	19.1	65	82	96	0.0	1.6	1.3	3.9	14.8	9.5	18.9	1003.5	1005.9	1007.9	0	60.0	516	97.1	99.8	100
14/06/2013	10.8	13.2	18.5	58	75	87	0.0	2.4	2.7	5.0	13	8.2	17.8	1002.3	1004.4	1005.8	0	76.8	524	91.8	99.8	100
15/06/2013	11.7	13.9	16.8	57	66	80	0.0	2.6	2.7	4.8	13	10.4	15.9	1005.5	1009.5	1013.2	0	56.4	619	97.1	100.0	100
16/06/2013	7.9	11.6	16.4	58	72	85	0.0	1.8	0.4	2.5	8.5	6.7	15.7	1009.9	1012.2	1014.4	0	65.9	526	91.5	99.9	100
17/06/2013	5.8	10.5	16.2	66	77	86	0.0	1.7	0.9	2.7	8	4.6	15.6	1007.3	1009.0	1010.9	0	63.0	559	93.7	99.8	100
18/06/2013	6.1	10.3	16.8	54	81	94	1.4	1.4	0.4	2.3	8	4.3	15.9	1010.7	1012.8	1016.5	0	69.3	521	90.1	99.2	100
19/06/2013	8.7	10.8	14.8	66	80	94	3.0	1.5	2.2	3.9	10.3	6.0	14.1	1016.4	1020.3	1023.5	0	49.7	556	88	96.7	100
20/06/2013	8.3	10.7	14.6	70	80	90	0.0	1.2	0.4	2.2	8	6.8	14.2	1019.7	1021.8	1023.7	0	48.2	336	91.8	99.7	100
21/06/2013	7.4	10.0	16.4	70	86	95	0.0	1.0	0	1.5	6.3	6.6	16.0	1018.1	1020.0	1022.0	0	54.8	598	91.8	99.7	100
22/06/2013	5.8	9.4	14.4	73	90	96	4.4	0.8	0.4	1.8	6.7	4.3	13.9	1021.9	1023.8	1026.3	0	44.6	340	91.5	99.7	100
23/06/2013	9.7	10.7	12.4	95	97	97	20.0	0.5	0	1.6	6.3	8.7	12.4	1023.8	1025.9	1028.0	0	46.2	263	51.2	84.7	100
24/06/2013	8.9	10.9	15.7	74	92	97	2.4	1.0	0.9	2.2	6.7	6.7	15.4	1013.2	1018.6	1023.7	0	71.3	502	70.5	91.9	100
25/06/2013	6.9	10.3	13.7	87	94	97	1.4	0.6	0	1.7	5.4	5.9	13.7	1013.2	1014.7	1015.9	0	45.6	434	89.8	98.7	100
26/06/2013	11.1	13.9	16.8	79	93	98	4.6	0.9	0	2.5	6.3	10.8	16.1	1015.6	1018.3	1021.0	0	47.2	233	81.9	92.5	100
27/06/2013	11.7	13.5	16.4	82	93	98	2.2	0.6	0	1.0	5.8	11.8	16.4	1019.3	1020.6	1021.9	0	47.1	310	68.1	88.5	100
28/06/2013	11.3	12.8	16.4	86	96	98	11.0	0.6	0	0.7	6.7	11.3	16.5	1020.6	1022.1	1023.7	0	42.1	252	78.1	95.6	100
29/06/2013	11.6	12.2	13.1	97	97	98	31.2	0.3	0	1.2	5.8	11.1	13.3	1021.3	1022.7	1023.7	0	22.8	119	84.5	96.4	100
30/06/2013	10.4	12.0	15.3	87	96	98	1.6	0.6	0.9	2.1	5.8	9.4	15.3	1022.3	1023.6	1024.9	0	46.8	422	47.4	90.0	100
Monthly	5.8	12.5	21.2	54	86	98	120.2	34.5	0	2.3	19.7	4.3	21.4	1002.3	1018.0	1030.4	0	51.5	619	47.4	97.4	100

2.4.2 Monthly Weather Charts

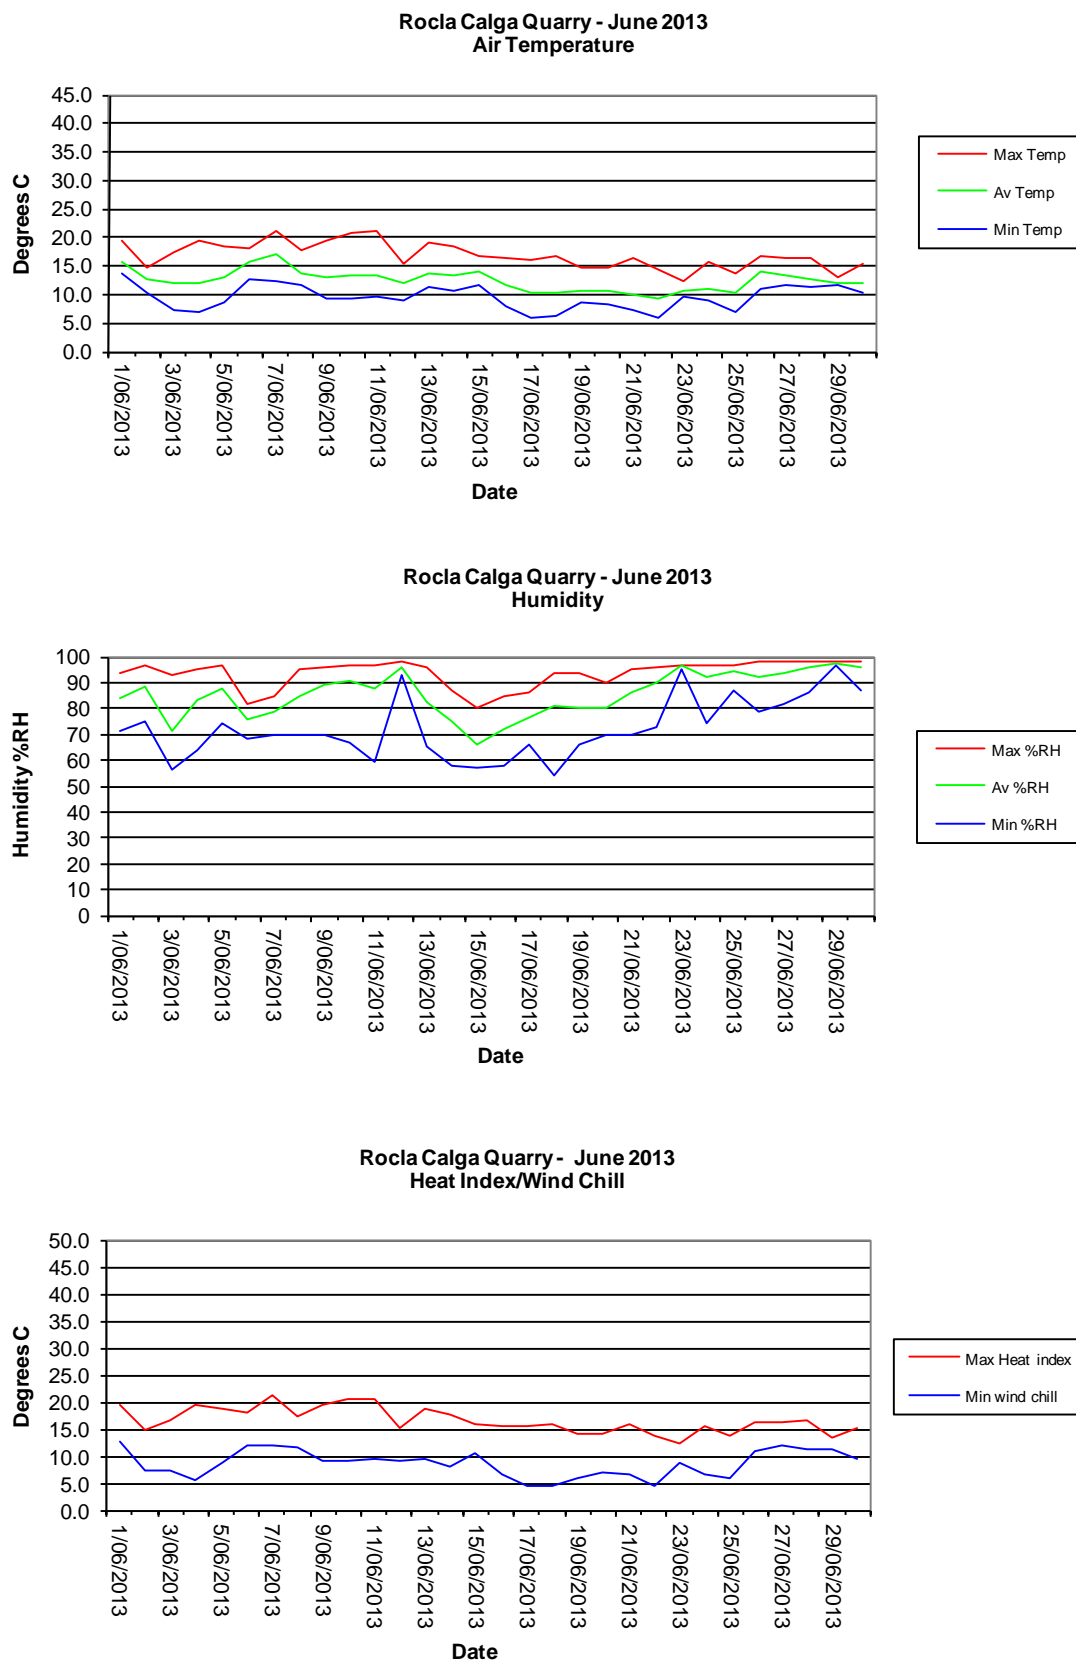

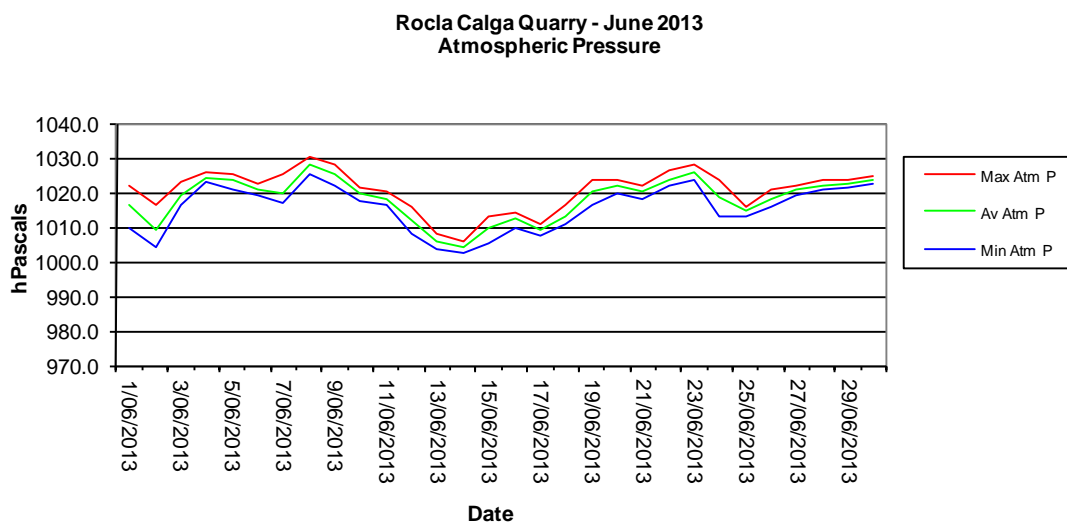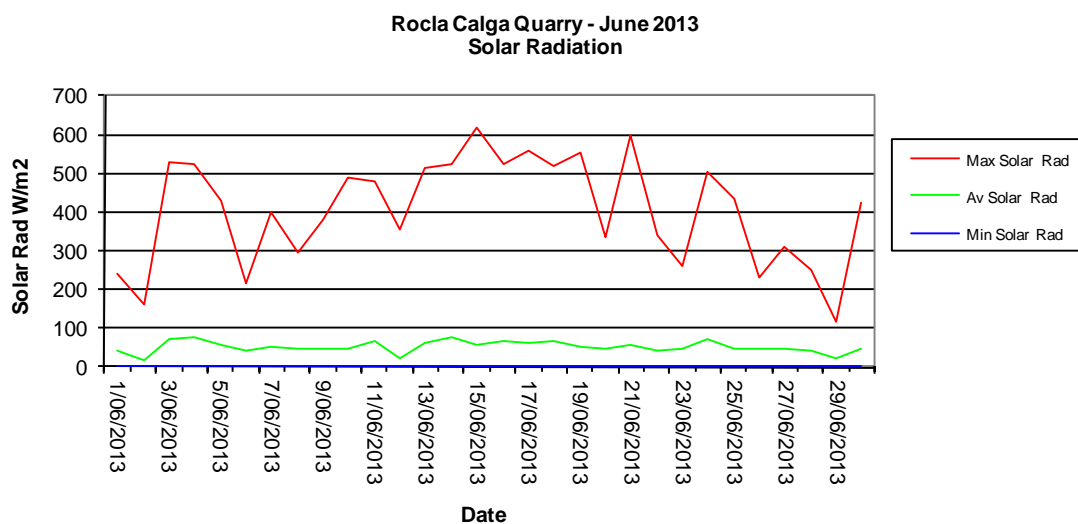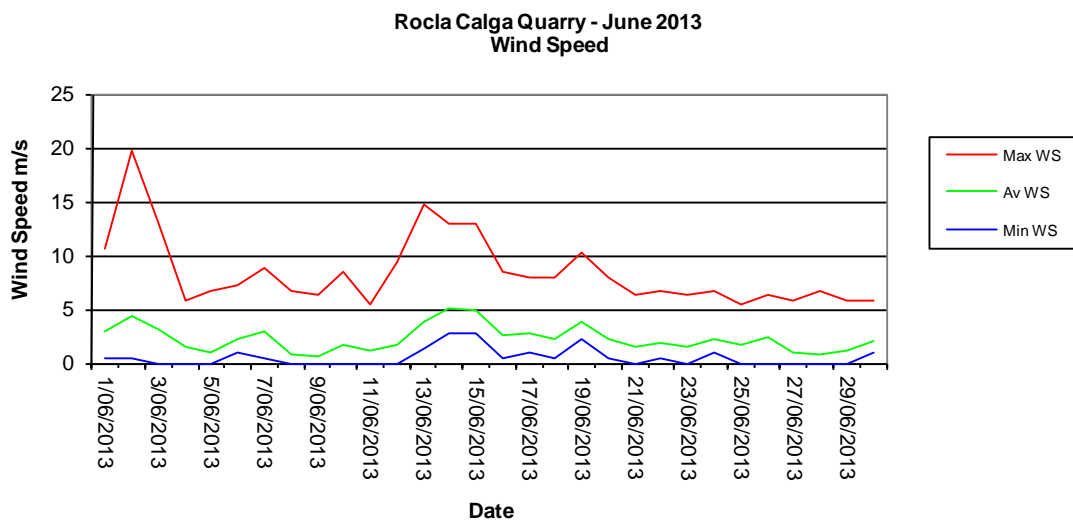


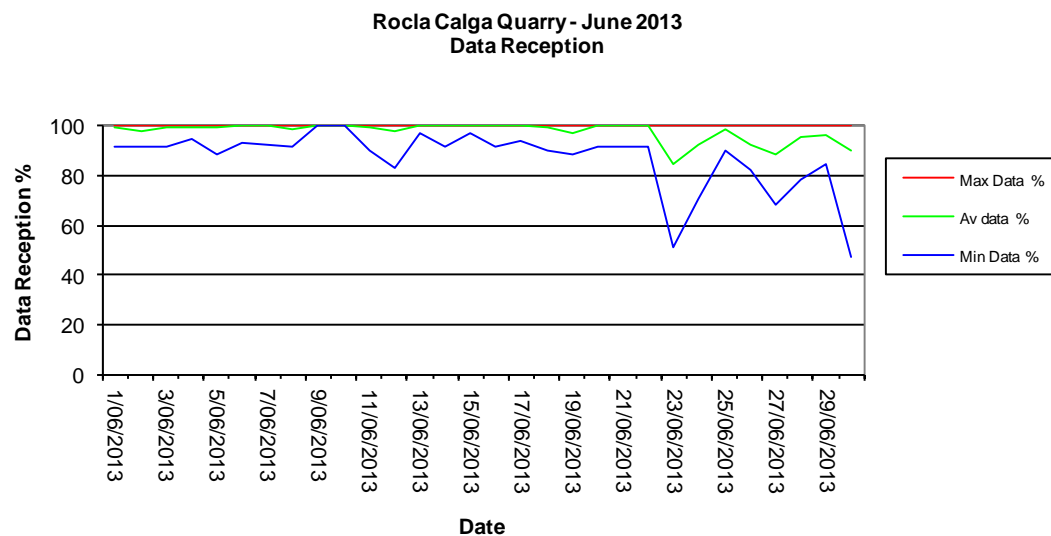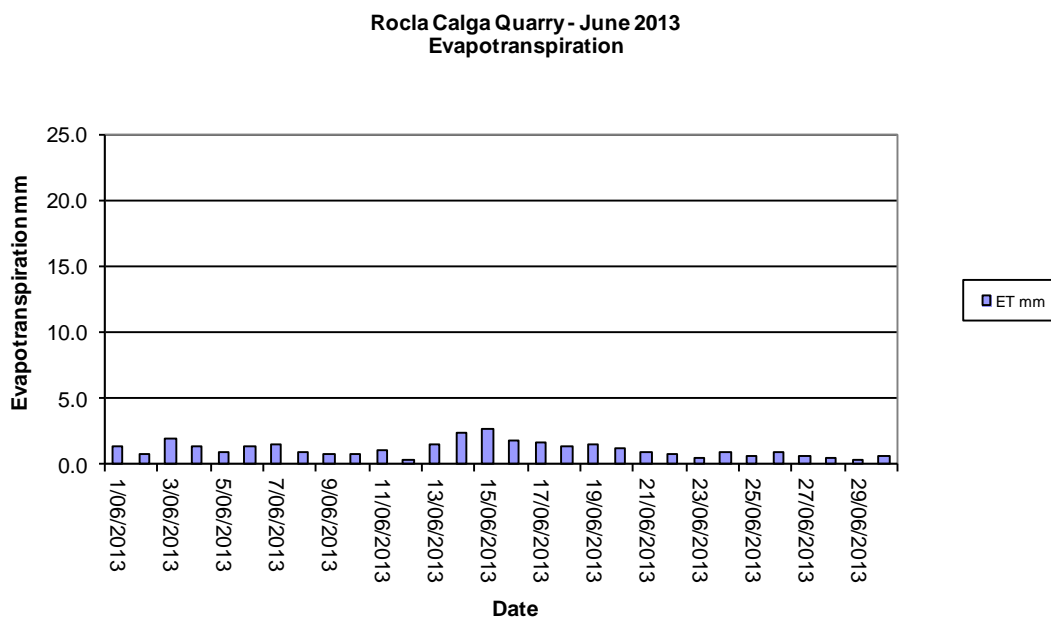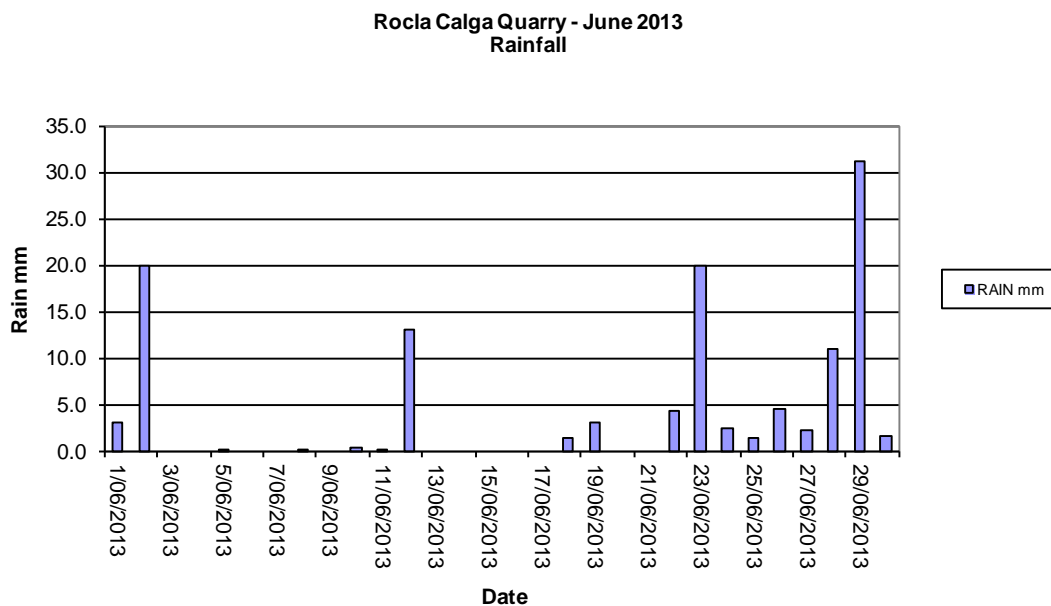

2.4.3 Monthly Windrose Plot

Frequency plot of the average wind speed and average direction over each 15 minute sampling period. Wind is considered to be calm when less than a 15 minute average of 1m/s.

00:15, 01 June 2013 – 23:45, 30 June 2013

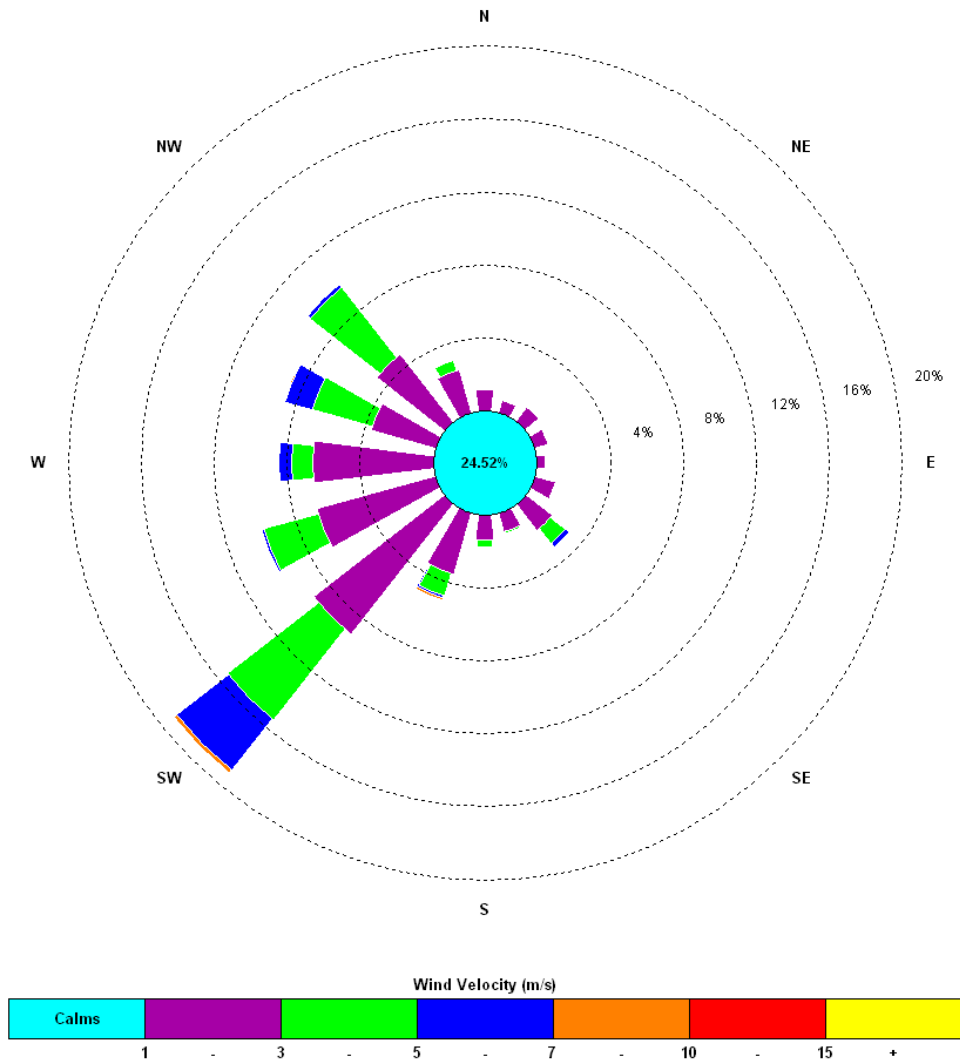

The predominant winds were from the NW to SW, with strongest winds from the SW. The maximum wind speed was 9.4 m/s from the SW.

Appendix 1

Laboratory Certificates

Environmental Division

CERTIFICATE OF ANALYSIS

Work Order	: EN1302472	Page	: 1 of 4
Client	: CARBON BASED ENVIRONMENTAL	Laboratory	: Environmental Division Newcastle
Contact	: MR COLIN DAVIES	Contact	: Peter Keyte
Address	: 47 BOOMERANG ST CESSNOCK NSW, AUSTRALIA 2325	Address	: 5 Rosegum Road Warabrook NSW Australia 2304
E-mail	: cbased@bigpond.com	E-mail	: peter.keyte@als.com.au
Telephone	: +61 49904443	Telephone	: 61-2-4968-9433
Facsimile	: +61 02 49904442	Facsimile	: +61-2-4968 0349
Project	: ROCLA CALGA DUSTS	QC Level	: NEPM 1999 Schedule B(3) and ALS QCS3 requirement
Order number	: ----	Date Samples Received	: 04-JUL-2013
C-O-C number	: ----	Issue Date	: 15-JUL-2013
Sampler	: CB	No. of samples received	: 6
Site	: ----	No. of samples analysed	: 6
Quote number	: SY/428/12		

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for release.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Dianne Blane	Laboratory Coordinator (2IC)	Newcastle - Inorganics



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

- Analysis as per AS3580.10.1-2003. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m².mth as sampling data was provided by the client.



Analytical Results

Sub-Matrix: DUST (Matrix: AIR)

Client sample ID

Client sampling date / time

				CD1 03/06/13 - 03/07/13 03-JUL-2013 15:00 EN1302472-001	CD2c 03/06/13 - 03/07/13 03-JUL-2013 15:00 EN1302472-002	CD3 03/06/13 - 03/07/13 03-JUL-2013 15:00 EN1302472-003	CD4 03/06/13 - 03/07/13 03-JUL-2013 15:00 EN1302472-004	CD5 03/06/13 - 03/07/13 03-JUL-2013 15:00 EN1302472-005
Compound	CAS Number	LOR	Unit					
EA120: Ash Content								
Ash Content	----	0.1	g/m ² .month	0.1	0.2	0.1	0.1	0.1
Ash Content (mg)	----	1	mg	2	4	2	1	1
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m ² .month	0.4	0.6	0.5	0.3	0.4
Combustible Matter (mg)	----	1	mg	7	10	9	6	7
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m ² .month	0.5	0.8	0.6	0.4	0.5
Total Insoluble Matter (mg)	----	1	mg	9	14	11	7	8



Analytical Results

Sub-Matrix: DUST (Matrix: AIR)

Client sample ID

Client sampling date / time

				CD6	----	----	----	----
				03/06/13 - 03/07/13				
				03-JUL-2013 15:00	----	----	----	----
Compound	CAS Number	LOR	Unit	EN1302472-006	----	----	----	----
EA120: Ash Content								
Ash Content	----	0.1	g/m².month	0.2	----	----	----	----
Ash Content (mg)	----	1	mg	3	----	----	----	----
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m².month	0.4	----	----	----	----
Combustible Matter (mg)	----	1	mg	7	----	----	----	----
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m².month	0.6	----	----	----	----
Total Insoluble Matter (mg)	----	1	mg	10	----	----	----	----

Environmental Division

CERTIFICATE OF ANALYSIS

Work Order	: ES1315090	Page	: 1 of 3
Client	: CARBON BASED ENVIRONMENTAL	Laboratory	: Environmental Division Sydney
Contact	: MR COLIN DAVIES	Contact	: Client Services
Address	: 47 BOOMERANG ST CESSNOCK NSW, AUSTRALIA 2325	Address	: 277-289 Woodpark Road Smithfield NSW Australia 2164
E-mail	: cbased@bigpond.com	E-mail	: sydney@alsglobal.com
Telephone	: +61 49904443	Telephone	: +61-2-8784 8555
Facsimile	: +61 02 49904442	Facsimile	: +61-2-8784 8500
Project	: ROCLA QUARRY	QC Level	: NEPM 1999 Schedule B(3) and ALS QCS3 requirement
Order number	: ----	Date Samples Received	: 04-JUL-2013
C-O-C number	: ----	Issue Date	: 10-JUL-2013
Sampler	: CBE	No. of samples received	: 4
Site	: ----	No. of samples analysed	: 4
Quote number	: SY/428/12		

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. All pages of this report have been checked and approved for release.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results



NATA Accredited Laboratory 825

Accredited for compliance with
ISO/IEC 17025.

Signatories

This document has been electronically signed by the authorized signatories indicated below. Electronic signing has been carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Ankit Joshi	Inorganic Chemist	Sydney Inorganics
Dianne Blane	Laboratory Coordinator (2IC)	Newcastle - Inorganics
Hoa Nguyen	Senior Inorganic Chemist	Sydney Inorganics



General Comments

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting



Analytical Results

Sub-Matrix: **WATER** (Matrix: **WATER**)

Client sample ID

Client sampling date / time

				A	B	D	F	----
				[04-JUL-2013]	03-JUL-2013 15:00	03-JUL-2013 15:00	[04-JUL-2013]	----
Compound	CAS Number	LOR	Unit	ES1315090-001	ES1315090-002	ES1315090-003	ES1315090-004	----
EA005: pH								
pH Value	----	0.01	pH Unit	5.99	5.12	5.41	5.46	----
EA010P: Conductivity by PC Titrator								
Electrical Conductivity @ 25°C	----	1	µS/cm	64	68	76	61	----
EA015: Total Dissolved Solids								
Total Dissolved Solids @180°C	----	10	mg/L	30	40	44	32	----
EA025: Suspended Solids								
Suspended Solids (SS)	----	5	mg/L	<5	17	<5	<5	----
EP020: Oil and Grease (O&G)								
Oil & Grease	----	5	mg/L	<5	<5	<5	<5	----