

# **CBased Environmental** Pty Limited ABN 62 611 924 264



## **Calga Quarry**

## **Environmental Monitoring**

## **Dust Deposition Gauges, Surface and Ground** Waters and Meteorological Station

## **March 2019**

Colin Davies BSc MEIA CENVP

**Environmental Scientist** 

Date: 17 April 2019

## **Executive Summary**

CBased Environmental is contracted by Hanson Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes;

- · Dust Deposition Gauges;
- Surface Waters:
- Groundwaters; and
- Meteorological Station.

This report was prepared by CBased Environmental and includes the following:

- Dust Deposition results for March 2019;
- Surface Water quality results for March 2019;
- · Ground Water quality results for March 2019; and
- Meteorological report for March 2019.

The March 2019 dust deposition results for insoluble solids were generally increased when compared to February 2019. There were no excessively contaminated dust gauges this month. All sites, on a rolling annual average basis, are currently below the Air Quality Management Plan exceedance level of 3.7g/m².month. Results were found to be representative of dust levels as determined by the Australian Standard.

Monthly surface water samples were collected at sites A, C2 and F. Sites B and D were dry at the time of sampling and C1 was too muddy to access water level. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any sites in March 2019.

Bi-monthy groundwaters were sampled on the 29 March 2019. Groundwater depth generally decreased when compared to January 2019, with water moving towards the surface. pH at all sites is in the acidic range and generally slightly increased when compared to the previous results. EC levels were similar or decreased slightly at a majority of groundwater sites when compared to the January 2019 results.

The Calga Quarry weather station data recovery in March 2019 was approximately 100%. Please note after a machine outage on the 14/12/2018 the wind direction was locked on in a north direction. The wind direction was fixed on the 7/3/2019. Therefore, wind direction data is only available from the 7/3/2019. Data for March 2019 shows that rainfall recorded at the Calga Quarry was below the Gosford BOM mean rainfall and well below the Peats Ridge long term rainfall for February.

The rainfall comparison is provided below:

Calga Quarry	205.8 mm
BOM Peats Ridge*	NA
BOM Gosford*	256.4 mm
BOM Peats Ridge Long term mean for March*	135.9 mm

<sup>\*</sup>Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).

**Note**: Differences in the daily rainfall readings between BOM and the Calga station may occur due to BOM stations reporting rainfall at 9am and the Calga station recording rainfall at midnight.

## Sampling Program

Hanson Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. CBased Environmental are contracted to undertake dust deposition gauge, surface and groundwater and meteorological monitoring for the project. CBased Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard <u>AS3580.10.1</u> "*Methods for sampling and analysis of ambient air method. Determination of particulates- deposited matter- gravimetric Method*". Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m².month.

Surface waters are sampled in accordance with Australian Standards <u>AS5667.1</u> "Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples", <u>AS5667.6</u> "Water quality sampling—guidance on sampling of rivers and streams" and <u>AS5667.4</u> "Water quality sampling—guidance on sampling from lakes, natural and man-made". Surface water monitoring sites include local streams and dams. Basic analysis including pH, Electrical Conductivity, Total Suspended Solids, Total Dissolved Solids and Total Oil and Grease is conducted monthly at Sites A and F (dams) and when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwaters are sampled in accordance with Australian Standards <u>AS5667.1</u> "Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples" and <u>AS5667.11</u> "Water quality sampling—guidance on sampling of ground waters". Groundwater monitoring sites are sampled bi-monthly for depth and water quality. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real-time display. Metrological parameters are measured according to Australian Standard <u>AS3580.14</u> "Methods for sampling and analysis of ambient air. Meteorological monitoring for ambient air quality monitoring applications"

The weather stations have the following sensor configuration;

- Air temperature
- Humidity
- Rainfall
- Atmospheric pressure
- Evaporation
- Solar radiation
- Wind speed
- Wind direction

CBased Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

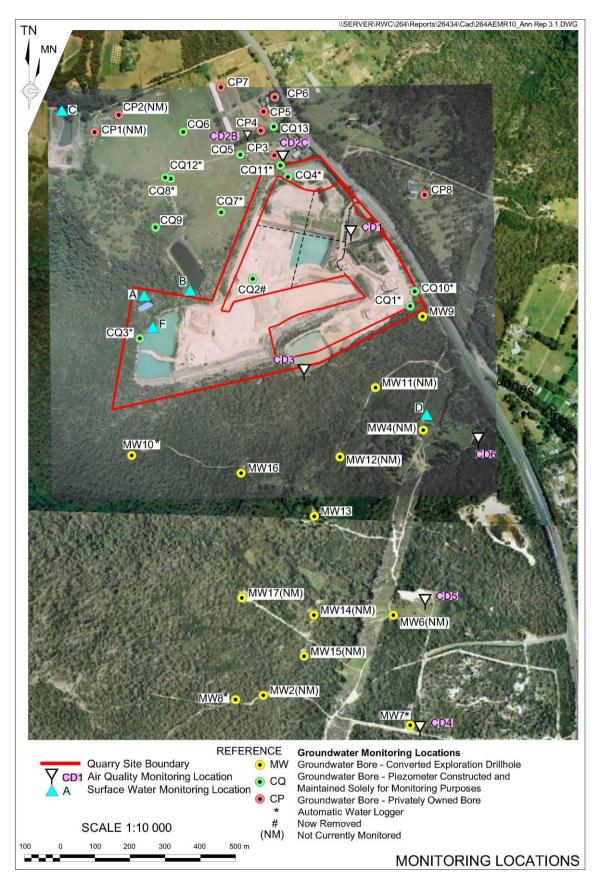


Figure 1: Hanson Calga Quarry environmental monitoring locations

## 2.0 Monthly Results

## 2.1 Dust Deposition Gauges

**Table 1** displays the results for March 2019 and the project 12-month rolling average. Results are in g/m².month.

Table 1: Dust Deposition results: 1 March – 29 March 2019 (28 days)


Site	Monthly Insoluble Solids (g/m².month)	Monthly Ash Residue (g/m².month)	Monthly Combustible Matter (g/m².month)	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids (g/m².month)
CD1	2.4	1.6	0.8	67	2.9
CD2c	2.4	1.5	0.9	63	1.5
CD3	1.8	1.2	0.6	67	1.3
CD4	1.5	1.0	0.5	67	1.2
CD5	2.7	1.7	1.0	63	1.1
CD6	1.8	1.3	0.5	72	1.2

Insoluble Solids marked with an \* indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects. Results in bold indicate insoluble solids levels above 3.7 g/m².month; the Development Consent's annual average amenity criteria at residential locations. The current rolling annual average is calculated from April 2018 to March 2019.

CD1 was installed on the 1 May 2006. CD2a was discontinued at the start of August 2006 due to quarry operations "mining out" the site of the gauge. The replacement gauge, Site CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD4 was installed on 3 October 2006, to gauge air quality impacts to the south of the site operations, as were CD5 and CD6 which were installed on the 14 December 2006. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. The replacement gauge, CD2c, was located on a rehabilitated section of land between the extraction area and adjacent resident.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The laboratory analysis is provided in **Appendix 1**.

**Figure 2: Dust Deposition Charts** 

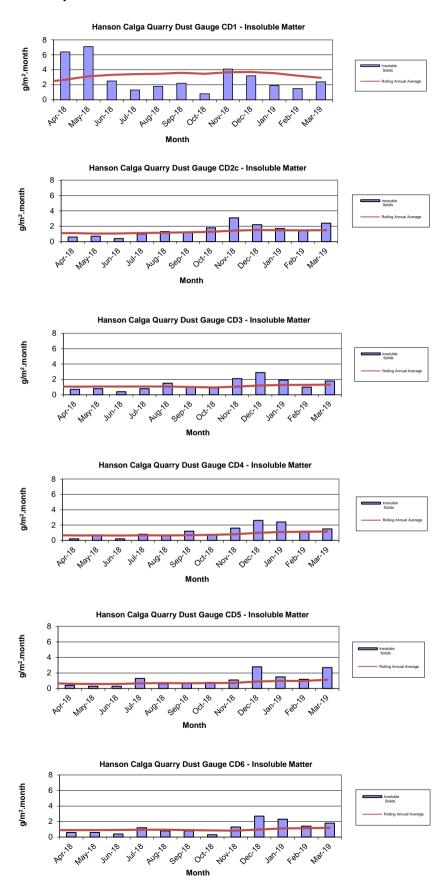

## 2.2 Surface Water Monitoring

Monthly surface water monitoring was conducted on the 29 March 2019 and results are listed in **Table 2**. The laboratory analysis sheets are provided in **Appendix 1**.

Table 2: Monthly surface water monitoring - March grab sample results

Site	Observed Flow Rate	Water Colour	Turbidity	рН	EC (μS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
Α	Dam	Clear	Clear	5.93	79	84	12	<5
В				Dry				
C1	Too low to	o sample/ n	o access – dai	m has be	een too mu	ddy to rea	ch pool of	water
C2	Trickle	Clear	Brown	6.04	83	80	6	<5
D				Dry				
F	Dam	Clear	Clear	5.19	68	77	28	<5

Samples were collected at sites A, C2 and F. Sites B and D were dry at the time of sampling and C1 was too muddy to access water level. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic range, low Electrical Conductivity, low Total Dissolved Solids and low Total Suspended Solids. Oil and Grease was not detected at any sites in March 2019.

#### 2.2.1 Non-Routine Surface Water Sampling

The following non-routine sampling was undertaken during March 2019:

Rainfall event sampled by site on the 18 March 2019.

Laboratory analysis certificates are provided in Appendix 1.

## 2.3 Groundwater Monitoring

Bi-monthly groundwaters were sampled on 29 March 2019. Water quality tests for pH and electrical conductivity were conducted by CBased Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and Electrical Conductivity (+/- 5%) was obtained between samples. Data is displayed in **Table 3** and **Figures 3 to 6**.

Groundwater depth generally decreased when compared to January 2019, with water moving towards the surface. pH at all sites is in the acidic range and generally slightly increased when compared to the previous results. EC levels were similar or decreased slightly at a majority of groundwater sites when compared to the January 2019 results.

Bi-monthly groundwater monitoring is next scheduled for May 2019.

**Table 3: Groundwater Quality Data** 

Reference	Bore	Туре	Depth to water TOC (m) April 2006	Depth to water TOC (m) This report	pH This report	Electrical Conductivity (μS/cm) This report		
CQ3	Voutos	* Monitor	10.53	10.61	6.40	150		
CQ4	Voutos	* Monitor	8.78	11.08	5.74	127		
CQ5	Gazzana	DIP Only	8.69	8.17	5.66	160		
CQ6	Gazzana	DIP Only	16.00	Cove	ered over in paddo	ock		
CQ7	Gazzana	* Monitor	6.89	6.48	4.44	97		
CQ8	Gazzana	* Monitor	11.03	6.96	4.25	118		
CQ9	Gazzana	DIP Only	10.10	Ble	ocked / Damaged			
CQ10	Voutos	* Monitor	NI	25.82	5.05	129		
CQ11S	Gazzana	* Monitor	NI	11.98	5.46	136		
CQ11D	Gazzana	* Monitor	NI	12.96	5.15	132		
CQ12	Gazzana	* Monitor	NI	5.95	4.54	111		
CQ13	Kashouli	* Monitor	NI	14.67	4.31	147		
CP3	Gazzana	Domestic	10.40		Destroyed			
CP4	Kashouli	Domestic	13.63	9.65	Bloc	locked		
CP5	Kashouli	Domestic	16.61	8.96	6.08	96		
CP6	Kashouli	Domestic	16.27	10.95	4.31	128		
CP7	Kashouli	Production	8.56	2.89	5.19	38		
CP8	Rozmanec	Domestic	22.17	22.95	4.64	110		
CP13	W P White	Domestic		12.20	No sample- Ins	sufficient space ailer		
CP15	32 Polins	Domestic						
	Road Calga			3.38	4.60	121		
MW7	Rocla Bore	* Monitor	15.76	15.16	5.58	78		
MW8	Rocla Bore	* Monitor	9.82	7.63	5.26	62		
MW9	Rocla Bore	* Monitor	22.44	24.22	4.46	74		
MW10	Rocla Bore	* Monitor	15.41	11.43	4.42	99		
MW13	Rocla Bore	DIP Only	NI	7.49	4.21	95		
MW16	Rocla Bore	DIP Only	NI	8.06	4.44	93		
MW17	Rocla Bore	DIP Only		9.66	4.98	103		

#### Notes:

TOC = Water level measured from top of bore case to water.

NM = Not Monitored – unable to sample water due to non-operational pump.

NR = Not Required by resident.

NI = These bores were not installed in April 2006 but are now operational. April 2006 was the first set of measurements taken by Carbon Based Environmental Pty Limited.

Shading is used to indicate the following trends in water depth (compared to the last reading):


Increase to ground water depth (water moved away from surface)
Decrease to ground water depth (water moved towards surface)
Stable water depth (+/- 0.01m)

Available groundwater loggers were downloaded and will be forwarded to the Hanson Calga Quarry groundwater consultant.


<sup>\* =</sup> Logger Installed.

Figures 3 to 6: Groundwater Depth Charts.




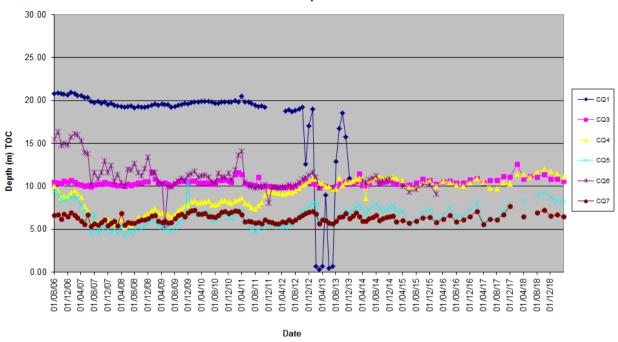


#### Rocla Calga Groundwaters - Quarry Bores CQ10 to CQ13 Water depth TOC

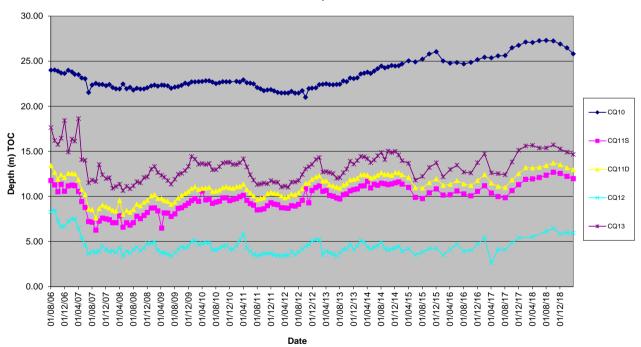

## Rocla Calga Groundwaters - Quarry Bores CP3 to CP8 Water Depth TOC

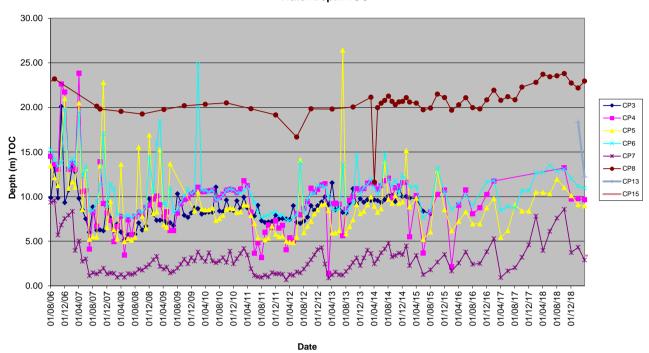

# Rocla Calga Groundwaters - Quarry Bores MW7 to MW17 Water Depth TOC

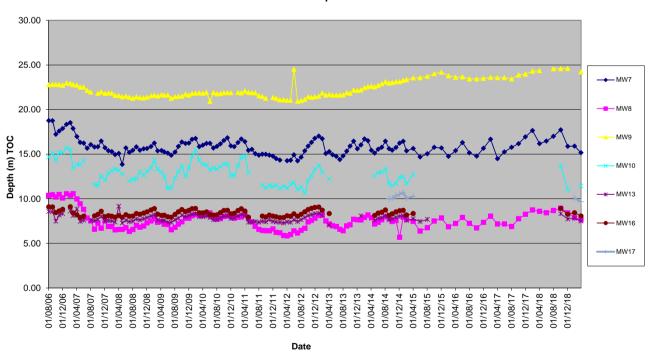

## 2.4 Meteorological Monitoring

The Calga Quarry weather station data recovery in March 2019 was approximately 100%. Please note after a machine outage on the 14/12/2018 the wind direction was locked on in a north direction. The wind direction was fixed on the 7/3/2019. Therefore, wind direction data is only available from the 7/3/2019.

The weather station data follows and includes;

- Monthly data numerical summary;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception; and
- Wind rose (frequency distribution diagram of wind speed and direction).

An annual calibration was undertaken on the weather station during September 2018 and is next due in September 2019.

Monthly weather statistics from the nearby Bureau of Meteorology (BOM) at Peats Ridge station are no longer available. However, the long-term rainfall mean is available via a link on the Gosford BOM Daily Weather Observation page.

Data for March 2019 shows that rainfall recorded at the Calga Quarry was below the Gosford BOM mean rainfall and well below the Peats Ridge long term rainfall for February.

The rainfall comparison is provided below:

Calga Quarry	205.8 mm
BOM Peats Ridge*	NA
BOM Gosford*	256.4 mm
BOM Peats Ridge Long term mean for March*	135.9 mm

NA = Not Available


\*Data sourced from Bureau of Meteorology (BOM) website (www.bom.gov.au).


## 2.4.1 Monthly Meteorological Data Summary

Summary Mar-19 Hanson - Calga


Date	Min Temp	Av Temp	Max Temp	Min %RH	Av %RH	Max %RH	RAIN mm	Min WS	AvWS	Max WS	Min wind chill	Max Heat index	Min Atm P	Av Atm P	Max Atm P	Min Data %	Av data %	Max Data %
1/03/2019	18.3	23.5	29.2	48.0	72.3	91.0	0.0	0.0	2.1	11.2	18.3	29.7	1019.9	1021.1	1022.6	0.0	19.8	65.0
2/03/2019	17.7	22.9	28.7	50.0	75.1	95.0	0.0	0.0	2.0	10.3	17.7	29.4	1019.1	1021.0	1022.9	0.0	38.1	78.5
3/03/2019	17.3	21.5	30.2	52.0	83.4	96.0	0.0	0.0	1.6	9.8	17.3	32.0	1017.2	1019.4	1021.4	0.0	18.2	42.9
4/03/2019	18.6	23.6	32.3	47.0	77.2	92.0	0.0	0.0	1.6	9.8	18.6	34.2	1013.9	1016.7	1019.1	0.0	20.9	65.9
5/03/2019	17.3	23.1	33.6	47.0	80.5	96.0	0.6	0.0	1.4	9.4	17.3	36.7	1006.9	1011.5	1016.0	0.0	33.5	73.5
6/03/2019	19.1	25.2	36.2	28.0	64.1	94.0	3.2	0.0	2.1	19.2	18.2	35.6	1002.3	1006.7	1013.8	0.0	38.4	84.2
7/03/2019	15.8	18.2	20.8	60.0	72.8	82.0	1.8	0.0	1.6	8.9	15.7	20.4	1013.8	1018.8	1021.0	0.0	76.4	100.0
8/03/2019	16.2	22.7	29.9	53.0	71.3	86.0	0.0	0.0	2.1	10.7	16.2	31.7	1013.0	1016.6	1020.4	24.6	76.5	100.0
9/03/2019	19.9	21.4	23.2	79.0	90.3	97.0	1.4	0.0	1.0	8.5	20.0	24.1	1011.4	1013.8	1015.3	61.5	82.3	94.0
10/03/2019	18.8	24.7	33.4	46.0	76.7	98.0	0.0	0.0	1.4	8.9	18.8	35.9	1003.9	1009.3	1014.8	39.1	75.5	91.8
11/03/2019	20.9	24.4	28.8	55.0	68.3	84.0	0.0	0.0	1.9	9.8	21.0	30.3	1004.2	1005.7	1008.1	0.0	56.7	88.6
12/03/2019	19.4	25.4	35.3	20.0	67.6	95.0	0.4	0.0	2.0	10.7	19.4	33.6	1000.5	1004.1	1009.8	47.6	72.1	98.7
13/03/2019	18.6	20.5	23.6	76.0	87.4	94.0	3.0	0.0	1.3	7.2	18.6	24.5	1010.0	1012.6	1014.2	53.3	79.1	96.5
14/03/2019	17.8	22.6	27.6	69.0	84.9	95.0	10.8	0.0	3.6	12.1	16.8	30.2	1004.7	1009.0	1013.2	37.5	69.1	98.7
15/03/2019	16.4	19.2	22.7	70.0	85.5	97.0	1.2	0.0	2.3	11.2	16.4	23.1	1008.3	1011.8	1015.9	61.2	85.0	96.2
16/03/2019	16.3	18.6	21.1	84.0	93.1	98.0	40.4	0.0	1.2	7.6	16.3	21.9	1013.7	1015.2	1016.5	51.4	75.4	89.0
17/03/2019	17.8	19.1	21.0	84.0	92.9	98.0	84.8	0.0	2.4	8.5	16.6	21.9	1009.5	1011.6	1014.9	55.8	72.4	86.8
18/03/2019	17.1	19.0	23.6	71.0	90.6	97.0	6.8	0.0	1.3	7.6	17.1	24.2	1006.9	1008.7	1010.7	0.0	58.9	85.5
19/03/2019	17.3	20.0	24.3	77.0	91.5	97.0	2.2	0.0	0.9	7.2	17.3	25.3	1008.0	1009.3	1011.1	35.0	71.4	100.0
20/03/2019	17.3	20.7	26.3	69.0	89.8	98.0	0.0	0.0	1.1	7.6	17.4	27.7	1009.5	1010.7	1012.1	33.1	70.5	84.5
21/03/2019	17.2	20.7	25.5	76.0	91.2	98.0	5.2	0.0	1.0	8.5	17.3	26.9	1010.8	1012.5	1014.9	37.2	71.3	98.4
22/03/2019	17.3	21.1	26.8	66.0	87.7	98.0	1.6	0.0	0.6	5.4	17.3	28.3	1011.6	1013.3	1014.9	0.0	64.0	100.0
23/03/2019	14.8	21.0	30.7	46.0	83.2	98.0	3.8	0.0	1.4	9.4	14.8	31.7	1006.6	1010.0	1012.6	60.9	82.1	93.1
24/03/2019	19.4	24.0	33.9	41.0	77.8	94.0	0.0	0.0	1.4	9.8	19.5	35.4	1006.2	1007.8	1009.4	74.1	84.6	92.4
25/03/2019	18.6	22.0	24.3	71.0	82.6	94.0	7.0	0.0	1.5	9.4	18.5	25.4	1004.7	1006.8	1009.4	0.0	50.4	100.0
26/03/2019	16.2	19.9	26.8	28.0	69.2	96.0	1.0	0.0	1.4	8.5	16.1	25.6	1009.1	1012.7	1018.7	0.0	50.0	100.0
27/03/2019	12.4	18.0	23.8	51.0	75.7	94.0	0.0	0.0	1.2	6.7	12.5	23.8	1018.5	1020.0	1021.6	20.8	57.6	100.0
28/03/2019	13.6	19.1	26.4	52.0	78.7	97.0	0.0	0.0	1.4	6.7	13.7	26.4	1013.7	1016.6	1019.4	0.0	54.5	74.8
29/03/2019	14.8	20.5	29.8	44.0	80.0	96.0	0.0	0.0	1.3	8.0	14.8	29.7	1004.0	1009.5	1014.2	0.0	46.2	89.3
30/03/2019	12.9	18.8	25.8	33.0	72.2	97.0	30.6	0.0	3.9	16.5	9.9	26.3	996.4	1001.5	1007.7	0.0	49.1	78.2
31/03/2019	11.1	15.6	22.2	37.0	52.0	76.0	0.0	0.0	3.2	11.2	8.6	21.0	1007.6	1012.5	1017.5	30.3	41.8	53.3
Monthly	11.1	21.2	36.2	20	80	98	205.8	0	1.7	19.2	8.6	36.7	996.4	1012.2	1022.9	0	59.4	100

#### 2.4.2 Monthly Weather Charts




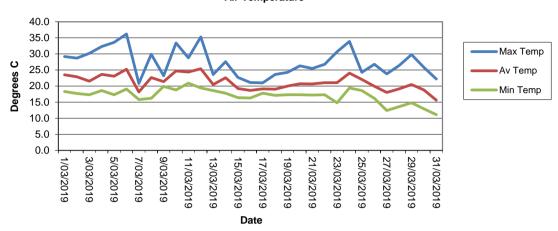


#### Hanson Calga Quarry - March 2019 Humidity

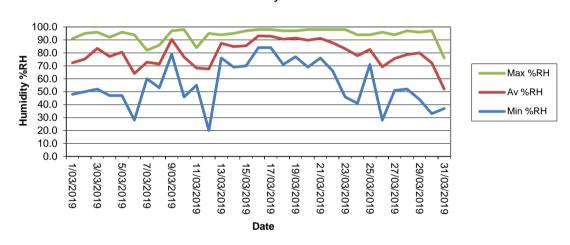


#### Hanson Calga Quarry - March 2019 Heat Index/Wind Chill

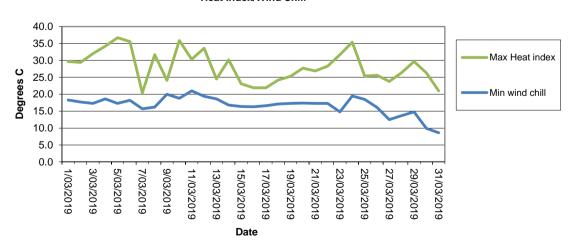


#### Hanson Calga Quarry - March 2019 Wind Speed

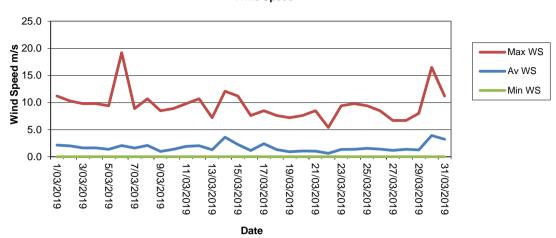


#### Hanson Calga Quarry - March 2019 Atmospheric Pressure

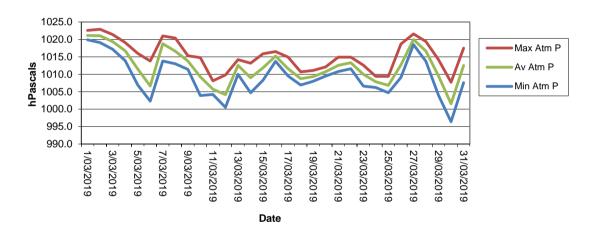

#### Hanson Calga Quarry - March 2019 Rainfall

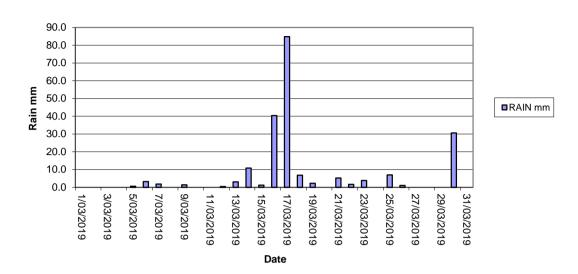


#### Hanson Calga Quarry - March 2019 Data Reception

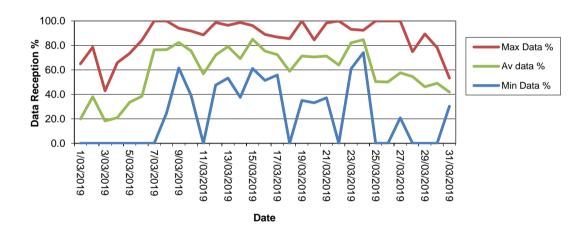

## 2.4.3 Monthly Windrose Plot

Frequency plot of the average wind speed and average direction over each 15-minute sampling period. Wind is considered to be calm when at less than a 15-minute average of 1m/s.

0:00, 7 March 2019 - 23: 45, 31 March 2019

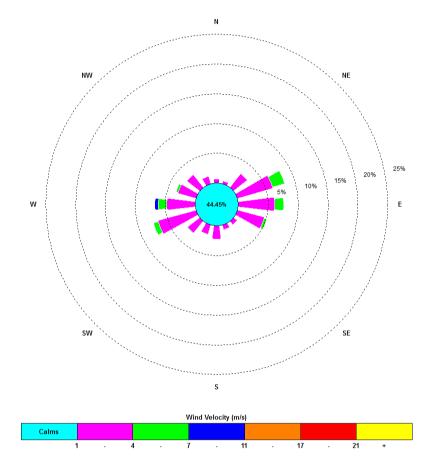

The predominant winds were from the E and ENE, with most frequent, strongest winds from the W. The maximum wind speed was 19.2 m/s from the N.

# **Appendix 1**

Field Sheets
Chain of Custody

**Laboratory Certificates** 



Client: ...... Hanson Calga Quarry .......

Collection Start Time: 9.40

Collection Stop Time: .....

Sampling ID: .....

Site	Time	Water	Insolul	ble Material ( ≠ = s	light, ✓ ✓ = m	nod etc)	Water	Water	Stand Level	Funnel Level	New Funnel	Comments
01.0	Collected	Level (mL)	Insects	Bird droppings		Dust	Turbidity	Colour	(Y/N)	(Y/N)	Diameter (mm)	
D1	3.35	1999				1	Øs⊤	©O Bn Gn Gy	4	4		
D2C	12.20	1999	V		1	V	Øs ⊤	O Bn Gn Gy	4	4		
D3	9.40	1999	/				©s T	O Bn Gn Gy	4	4		
CD4	10.25	1999	/		<b>/</b>		<b>O</b> ST	© Bn Gn Gy	Ù	4		Spider.
CD5	11.05	1999	1				Øs T	O Bn Gn Gy	1	1		
CD6	11-35	1999	/		/		<b>⊘</b> S T	O Bn Gn Gy	V	Y		
	11.50						CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
		1					CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
		-					CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				
			7				CST	C O Bn Gn Gy				
							CST	C O Bn Gn Gy				

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE)

Colour: C=Clear, O=Orange, Bn=Brown, Gn=Green, Gy = Grey (CIRCLE)

Report broken funnels and replacement diameters

LIENT: CBased Environmental I	Pty Ltd						IAPO	DAT	201/1		A CONTRACT OF A	Want Control	NI.					Australian Laboratory
OSTAL ADDRESS: 47 Boomera	ang St CESSNOC	K NSW 232	25							BATCH NO.:	are a comme	The Allerda	100					Services Pty Ltd
END REPORT TO: onitoringresults@cbased.com.a		SEND IN		min@cbased.com.au,						ased Environmen				_				
ATA NEEDED BY: 7 working da	ys			7 working days			PHON					monitoringre	sults@c	based.c	om.au			
ROJECT ID: Hanson Calga Dus	sts QUOTE NO.	SYBQ 222	-16	7 Working days						AT: HARD: Yes	FAX:	: DIS	K:	BULLE"	TIN BOARD		E-MAIL: Yes	
O. NO.:	COMMENTS			ORAGE OR DIPOSAL:	-	-	QC LE	VEL		QCS1:	QC	CS2:	QCS	3: Yes		QC		
O. NO.: DR LAB USE ONLY DOLER SEAL (CO	)			ON DIF OSAL.	w.		Soldis		latte				AN	ALYSIS	REQUIRE			Transfer of the second
5 70.6 No.	Total unless	specified				-	ble S	sidue	able N				- 181					
oken Intaci OLER TEMP: deg.C							Insoluable	Ash Residue	Combustable Matt					1 1				
	MPLE DATA			*CONTAINER D	ΔΤΑ		=	4	ŏ									NOTES
SAMPLE ID	MATRIX	DATE ON	DATE OFF	TYPE & PRESERVATIVE	NO.									4				
CD1	Dust	1.3.10	29.3.19	L G I NLOLKVATIVE	NO.													
CD2c	Dust		213			-	X	Х	Х									
CD3	Dust				-		Х	Х	Х	CENTED TO								
CD4	Dust				-			Х	Х				-13	1				
CD5	Dust	111			-			X	X									
CD6	Dust						-	X	X									
							^	^	^				_					
					1 2 7								-	+				
														+				
													_	-				
													-	+-+		-	+	
							- (									-		
		-												1		-		
												2 4 7 7						
		-																
					-	_	-	_			E 1 E 2			1 6 8				
1	RI	L ELINQUISHI	FD BY:	Total Park		-				1-11 E 1 E 1								
NE: LUSA 1	Ling	DATE:	DI.	29.3.19			14.45			M	RECEIV	ED BY						METHOD OF SHIPMENT
CBased Environmental			TIME:	17.00			DATE: 17/3/19									9		CONSIGNMENT NOTE
ME:			DATE:				AME:	-		ALS					17:11			7,0121
			TIME						-					DATE:				TRANSPORT CO. NAME
ntainer Type and Preservative (	Codes: P = Neutra	Plastic: N :	= Nitric Acid Dr	esented: C = Cadition III I			OF:  TIME:  ved; J = Solvent Washed Acid Rinced Jar; S = Solvent Washed Acid Rinced Glass Bottle;  Z = Zinc Acetate Preserved Bottle; E = EDTA Preserved Bottles: ST = Sterile Bottle;											A company of the second

AUSTRALIAN LABORATORY SERVICES P/L

Environmental Division Newcastle Work Order Reference EN1902184



Telephone: +61 2 4014 2500



#### **CERTIFICATE OF ANALYSIS**

Work Order : EN1902184

: CBASED ENVIRONMENTAL PTY LTD

Contact : All Deliverables

Address : Unit 3 2 Enterprise Cres

Singleton NSW 2330

Telephone : +61 02 6571 3334
Project : Hanson Calga Dusts

Order number : ----

C-O-C number : ----

Sampler : CARBON BASED ENVIRONMENTAL PTY LTD

Site

Client

Quote number : SYBQ/222/16 and PLANNED EVENTS

No. of samples received : 6
No. of samples analysed : 6

Page : 1 of 4

Laboratory : Environmental Division Newcastle

Contact :

Address : 5/585 Maitland Road Mayfield West NSW Australia 2304

Telephone : +61 2 4014 2500

Date Samples Received : 29-Mar-2019 17:11

Date Analysis Commenced : 03-Apr-2019

Issue Date : 05-Apr-2019 14:58



This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

#### Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories Position Accreditation Category

Dianne Blane Laboratory Coordinator (2IC) Newcastle - Inorganics, Mayfield West, NSW

Page : 2 of 4
Work Order : EN1902184

Client : CBASED ENVIRONMENTAL PTY LTD

Project : Hanson Calga Dusts

#### **General Comments**

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

- ^ = This result is computed from individual analyte detections at or above the level of reporting
- ø = ALS is not NATA accredited for these tests.
- ~ = Indicates an estimated value.
- Analysis as per AS3580.10.1-2016. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m².mth as sampling data was provided by the client.




Page : 3 of 4
Work Order : EN1902184

Client : CBASED ENVIRONMENTAL PTY LTD

Project : Hanson Calga Dusts

#### Analytical Results

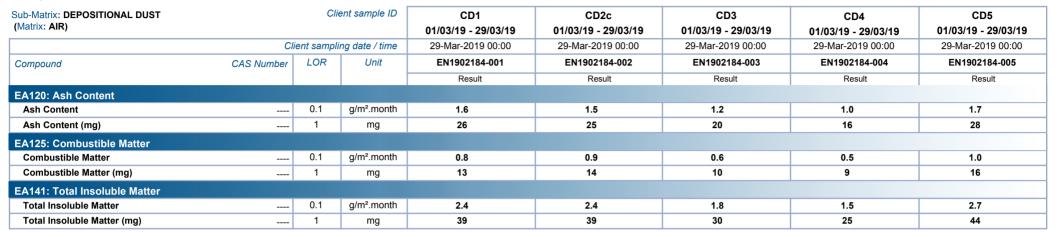




Page : 4 of 4
Work Order : EN1902184

Client : CBASED ENVIRONMENTAL PTY LTD

Project : Hanson Calga Dusts

#### Analytical Results

Total Insoluble Matter (mg)

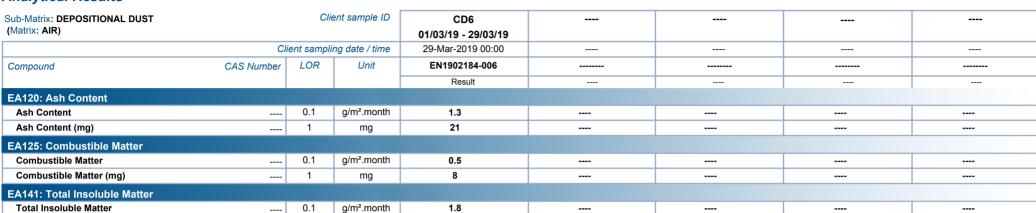

----

----

----

29

1

mg



----



Date: 29.3-19

Todays Collection									
Time Start:	9-90								
Time Finish:	12-50								

Client:

Hanson Calga

Project:

**SURFACE WATERS** 

Site	Flow Rate	Odour	Sampling Time	Bottles	Water Turbidity	Water Colour	Comments
A	DAM	No	9.30	1x 250ml GP, 1x 500mL GP, 1x PG	ØST.	<b>⊘</b> LO O B G	
В		No		1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	DRY
C1		1000	12.50	1x-250ml GP, 1x 500ml GP, 1x PG	CST	CLOOBG	To middy to reach
C2	trickle	NO	12.40	1x 250ml GP, 1x 500mL GP, 1x PG	©s T	<b>Æ</b> LO O <b></b> G	
D			11.30	4x 250ml GP, 1x 500ml GP, 1x PG	CST	CLOOBG	Dry
F	DiAM	No	9-05	1x 250ml GP, 1x 500mL GP, 1x PG	ØS T	©LO O B G	J
				6 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -			

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE)

Signed: 25

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

Sampled by: Lelscif Jonas

CLIENT: CBased Environmenta					li li	ABO	RATO	RY B	RATCI	- NO	, (20-21)	1 25 12 nc	W 8 2 2	70-0		The street was		Australian Laboratory
POSTAL ADDRESS: PO Box 24	45 CESSNOCK N	SW 2325			9	SAME	PIFRS	S:CBa	sed F	nviro.	nmental	Dtv I td	新り変数で <u>に</u> 1	and the second		m 311 -5	(1) (1) (1) (1) (1) (1) (1) (1) (1) (1)	Services Pty Ltd
SEND REPORT TO:						o,		J. O D G	JOCU L	110110	inental	r ty Ltu						
monitoringresults@cbased.com		SEND INV	OICE TO	: renae.mikka@cbased.com.au	F	PHON	VE: 02	65713	3334			E-MAII	L: moni	itorinaresul	ts@cbased.com.au			
DATA NEEDED BY: 5 working of		REPORT	NEEDED	BY: 5 working days						HARD	: Yes	FAX		DISK:			V	
PROJECT ID: Hanson Quarry S		: SYBQ-222-	16				EVEL:		QCS		. 100		CS2:		BULLETIN BOARD		E-MAIL: Yes	
P.O. NO.:	COMMENTS	S/SPECIAL H	ANDLING	G/STORAGE OR DIPOSAL:											ANALYSIS REQUIRED	Q	CS4:	
OR LAB USE ONLY	Kal is														WALTOIS REGUINED	T		
es roken 20 6 Inta	Total unless	specified								g								
OOLER TEMP: deg.C						F.	E	TSS	TDS	+ 0							1 1 1	I have a
SAN	IPLE DATA			*CONTAINER DATA	-	ш	ш	-	-	0	-		-					NOTES
SAMPLE ID	MATRIX	DATE	TIME		NO.						-	+		-		_		
Α	Water	79.319		1x 250mlGP,1x 500mLGP,1xPG	-			-		-	-	-						
В	Water	1	1 30	1x 250mlGP,1x 500mLGP,1xPG		X			X	X								
C1	-Water			1x 250mlGP, 1x 500mLGP, 1xPG		^			- 2			-						
C2	Water		12.40	1x 250mlGP,1x 500mLGP,1xPG		X	X		X	X	-			-				
D	Water	1x,250mlGP,1x,500mLGP,1xPG																
F	Water		47-0	1x 250mlGP,1x 500mLGP,1xPG		х	x		x	X	-			-		-		
								-	~	^				-		-		
												1		++				
	-11		- V										-				+++	
										1,000						-		
						1.4										-		
				A										300				
			1.2.7.0				1						1					
				TOTAL BOTTLES:									100					
AME: Leesa	E: Lelsa King DATE 29-3-19									-	F	RECEIV	/ED BY					METHOD OF SHIPMENT
F: CBased Environmental								NAME: DATE: 29/3/19										CONSIGNMENT NOTE
AME:				TIME: (7.00	0	OF: AC; TIME: 17:11									CONSIGNAMENT NOTE I			
SIVIE :				DATE:		AME	:								DATE:			TRANSPORT CO. NAME
				TIME: Acid Preserved; C = Sodium Hydrox	0	F:												THANGI ON I CO. NAIVIE

**AUSTRALIAN LABORATORY SERVICES P/L** 

O = Other.

**Environmental Division** Sydney
Work Order Reference
ES1909754



Telephone: - 61-2-8784 8555



#### **CERTIFICATE OF ANALYSIS**

Work Order : ES1909754

: CBASED ENVIRONMENTAL PTY LTD

Contact : All Deliverables

Address : Unit 3 2 Enterprise Cres

Singleton NSW 2330

Telephone : +61 02 6571 3334

Project : HANSON QUARRY SW

Order number : ----

C-O-C number : ----

Sampler : CARBON BASED ENVIRONMENTAL PTY LTD

Site

Client

Quote number : SYBQ/222/16 and PLANNED EVENTS

No. of samples received : 3
No. of samples analysed : 3

Page : 1 of 2

Laboratory : Environmental Division Sydney

Contact : Customer Services ES

Address : 277-289 Woodpark Road Smithfield NSW Australia 2164

Telephone : +61-2-8784 8555

Date Samples Received : 29-Mar-2019 17:11

Date Analysis Commenced : 29-Mar-2019

Issue Date : 05-Apr-2019 16:30



This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

#### Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories Position Accreditation Category

Ankit Joshi Inorganic Chemist Sydney Inorganics, Smithfield, NSW Neil Martin Sydney Inorganics, Smithfield, NSW Chemistry, Newcastle West, NSW

Page : 2 of 2 Work Order : ES1909754

Client : CBASED ENVIRONMENTAL PTY LTD

Project : HANSON QUARRY SW

#### **General Comments**

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

- ^ = This result is computed from individual analyte detections at or above the level of reporting
- ø = ALS is not NATA accredited for these tests.
- ~ = Indicates an estimated value.
- TDS by method EA-015 may bias high for various samples due to the presence of fine particulate matter, which may pass through the prescribed GF/C paper.

#### **Analytical Results**

Sub-Matrix: WATER (Matrix: WATER)		Clie	ent sample ID	Α	C2	F	 
	Cli	ent sampli	ng date / time	29-Mar-2019 09:30	29-Mar-2019 12:40	29-Mar-2019 09:05	 
Compound	CAS Number	LOR	Unit	ES1909754-001	ES1909754-002	ES1909754-003	 
				Result	Result	Result	 
EA005: pH							
pH Value		0.01	pH Unit	5.93	6.04	5.19	 
EA010P: Conductivity by PC Titrator							
Electrical Conductivity @ 25°C		1	μS/cm	79	83	68	 
EA015: Total Dissolved Solids dried at 18	30 ± 5 °C						
Total Dissolved Solids @180°C		10	mg/L	84	80	77	 
EA025: Total Suspended Solids dried at 1	104 ± 2°C						
Suspended Solids (SS)		5	mg/L	12	6	28	 
EP020: Oil and Grease (O&G)							
Oil & Grease		5	mg/L	<5	<5	<5	 



Hanson Calga



Client:

**Todays Collection** 9.20 Time Start: 16.00 Time Finish:

Date: 29.3,19

**Bottles** (Apr/Oct)

0ml GP, 1x 500mL GP, 1RP

0ml GP, 1x 500mL GP, 1RP

+ getting

Downloaded

Logger? (Y/N)\* yes

Mes

### **GROUNDWATERS**

Site DEP	DEPTH	Typical	Odour	Water	Water		1	2		
	1 1 2 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3 3	Depth (m)		Turbidity	Colour	рН	EC	рН	EC	
CQ3	10.6/	10.94	yes	<b>O</b> S T	(C) LOOBG	6.41	155. Zus	6.40	149-7005	1x 250n
CQ4	11.08	10.52	res	<b>Ø</b> ST	<b>O</b> LO O B G	5.71	130.0ms	5.74	000	1x 250n
CQ5	8.17	7.06	NO	<b>O</b> ST	<b>⊘</b> LO O B G	5.60	162.845	5.66	159.905	1x 250r
CQ6				CST	CLOOBG	cove		Reddo	ck	1x 250r
CQ7	6.48	6.46	No	<b>⊘</b> ST	(C)LOOBG	4.46	96-7Ws	4.44	96.905	1x 250r
CQ8	6.96	6.24	NO	ØST.	©LO O B G	4.27		4.25	117.845	1x 250r
CQ9			-	CST	CLO O B G	18	OCKE		-	1x 250r
CQ10	25.82	26.41	No	ØST	<b>6</b> LO O B G	4.99	130.145	5.05	128.82S	1x 250r
CO11S	11.98	11.02	ves	C <b>§</b> T	<b>O</b> LO O B G	5.37	1375W	5.46	135.845	1x 250

0ml GP, 1x 500mL GP, 1RP 0ml GP, 1x 500mL GP, 1RP 0ml GP, 1x 500mL GP, 1RP Jes 1405 0ml GP, 1x 500mL GP, 1RP Oml GP, 1x 500mL GP, 1RP yes \* 0ml GP, 1x 500mL GP, 1RP jes 0ml GP, 1x 500mL GP, 1RP CUIIO 5.15 136.145 **O**LO O B G 5.13 132.2 S 1x 250ml GP, 1x 500mL GP, 1RP yes YES OST 12.96 12.19 + CQ11D 4.54 . 0 us 1x 250ml GP, 1x 500mL GP, 1RP no losser inside 4-49 113-00 **OLOOBG** CQ12 5.95 (C)ST 4.44 NO 145.905 4.79 146.545 **OST OLOOBG** 1x 250ml GP, 1x 500mL GP, 1RP yes CQ13 14.14 NO removed x 250ml GP, 1x 500ml GP, 1RP CST CLOOBG CP3 64 Blocked Cor CLOOBG 250ml GP, 1x 500ml GP, 1RP CST CP4 9.65 95.1 96.2W 6.08 8.96 110 (OST C)LOOBG 6.01 1x 250ml GP, 1x 500mL GP, 1RP CP5 8.59 127.9 ms 4.65 1176uS 4.31 (OST **O**LO O B G 1x 250ml GP, 1x 500mL GP, 1RP 10.95 10.79 CP6 NO 5.24 38./us 38.6 W 5.19 CP7 2.89 NO @ ST CLOOBG 1x 250ml GP, 1x 500mL GP, 1RP 3.78 4-62 110. Lus 4.64 (C)ST (OLO OBG 109. 7 us 1x 250ml GP, 1x 500mL GP, 1RP 22.15 CP8 22.95 ON for basles X 250ml GP, Tx 500mL GP, 1RP Not enough space CLOOBG CP13 17.20 CST 4.59 122.1 4.60 121.1 **O**S T CLO O B G 1x 250ml GP, 1x 500mL GP, 1RP 3.38 CP15 110 5.24 88.325 5.58 78 2 1x 250ml GP, 1x 500ml GP, 1RP 110 ves 15.16 OST **Q**LOOBG MW7 16.11 NO 5.26 61.6 as 425 1x 250ml GP, 1x 500mL GP, 1RP (O)ST 5-36 67.745 (OLO OBG MW8 7.63 7.86 79.9us 73.6-1 ves 9.46 C LO O B G 4.55 1x 250ml GP, 1x 500mL GP, 1RP 24.22 OST MW9 23.87 NO 14.es 99.465 4.42 99-2W (C)LOOBG 11.43 OST 4.44 1x 250ml GP, 1x 500mL GP, 1RP MW10 NO 4.21 94.000 94.9 5 7.49 CLOOBG 4.19 1x 250ml GP, 1x 500mL GP, 1RP 10 OST MW13 92.8u1 4.44 CLOOBG 4.47 92.7ms 1x 250ml GP, 1x 500mL GP, 1RP **MW16** 8.06 NO QST 4.98 102.7 NO **CLOOBG** 1x 250ml GP, 1x 500mL GP, 1RP 9.66 COT 6.09 104/1 MW 17

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE) pH/EC meter #: %

Signed: 2 LL

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

\*If unable to download logger please provide comment/ explanation above

Sampled by: Lesso & Jonas



CHAIN OF CUSTODY

> ALS Laboratory: please tick →

DADELADE 21 Burma Road Pooraka SA 5095
Phi: 08 8559 0890 F: adelaide@ilsglobal.com
DBRISBANE 32 Shand Street Stafford OLD 4053
Ph: 07 3243 7222 F: samplea briabane@alsglobal.com
DGLADSTONE 46 Collemondab Drive Clarion QLD 4660
Ph: 07 7471 5900 E: gladatone@alsglobal.com

DMAGKAY 78 Herbour Road Mackey QLD 4740 Ph; 07 4944 0177 E: mackay@aisglobal.com

DMELBOURNE 2-4 Westall Road Springvale VIC 3171 Ph: 03 8549 9600 E: samples melbourne@alsplobal.com DMUDGEE 27 Sydney Road Mudgee NSW 2850 Ph: 02 6372 6735 E: mudgeo mail@alsglobal.com

DNEWCASTLE 5/585 Maidand Rd Mayfield West NSW 2304 Ph: 02 4014 2500 E: samples.newcastle@alsglobal.com

JINOWRA 4/13 Geofy Place North Nowra NSW 2541 Ph: 024423 2083 E: nowa@atsglobal.com LIPERTH 10 Hod Way Malaga WA 8090 Ph: 00 9209 7655 E: samples.peth@atsglobal.com "JSYDNEY 277-289 Woodpark Road Smithfield NSW 2164 Ph: 02 8784 8555 E: samples: sydney@alsglobal.com DTOWNSVILLE 14-15 Deema Court Bohle QLD 4818 Ph: 07 4796 0800 E: townswille.environmental@alsglobal.com

UWOLLONGONG 99 Kenny Street Wollongong NSW 2500 Ph; 02 4225 3125 E: portkembla@alsglobal.com

CLIENT: Hanson Calga Quarry - 151 Peats Ridge Rd Calga NSW 2250			1000000	TURNAROUND REQUIREMENTS:   Standard TAT (List due date):   Signarous de la company de											
FICE:	*		(Standard Trace On	TAT may be longer for some tests e.g., Ultra ganics)	☐ Non St	tandard or urg	ent TAT (Lie	st due date	):			G. Istooy S	of little divide		Ves V No V
					3Q 222-17 -				COC SEQUENCE NUMBER (Circle)				rizzet (co line	i p	Ollogo Nes No N
DER NUM	IBER: 4502544748					coc: 1				anige Tempe	raturato	opecept LFLC			
OJECT M	ANAGER: Brad Seaman					OF: 1 Sheet				njent					
SAMPLER: Brad Seaman SAMPLER MOBILE: 0438013113						RELINQUISHED BY: Chanse Delany			RECEIVED BY: RELINQUI				D BY:	dharal biometricis.	RECEIVED BY:
COC emailed to ALS? Provided on reciept of samples EDD FORMAT (or default):															am
Email Reports to: brad.seaman@hanson.com.au & monitoringresults@cbased.com.au					DATE/TIME:			DAT	DATE/TIME: DAT			DATE/TIME:		DATE/TIME:	
Email invoive to: nsw.accounts@hanson.com.au & chanae.delany@hanson.com.au															18.03.19 11.4
MMENTS	SPECIAL HANDLING/STORAGE OR D	ISPOSAL:													
ALS USE	SAMPLE DE MATRIX: SOLID.(S)	TAUS WATER (W)		SCONTA (AER-MIROR						Total (unfilter		s must be listed to a uired) or <b>Dissolved</b>			Additional Information
LAB ID	SAMPLE ID	DATE / TIME	MATRIX	TYPE & PRESERVATIVE codes below)	(refer to	TOTAL	Ηd	EC	TSS	тоѕ	Oil & Grease				Comments on likely contaminant levels, dilutions, or samples requiring specific QC analysis etc.
	Site A	18/03/2019 8:00AM	w	1x P, 1x O&G		2	1	1	1	1	1				
	, Site B	18/03/2019 8:00AM	w	1x P, 1x O&G		2	1	1	1	1	1				
	Site C	18/03/2019 8:30AM	W	1x P, 1x O&G		2	1	1	1	1	1				
	Site D	18/03/2019 8:00AM	W	1x P, 1x O&G		2	1	1	1	1	1		Envi	ron	- 1
Site F Licence discharge point		18/03/2019 8:00AM	w	1x P, 1x O&G		2	1	1	,	1	1		Environmental Division Sydney Work Order Reference ES1908111		rder Reference
										ļ			elepnone	0: +61	-2-8784 8555
					TOTAL	10	5	5	5	5	5			4	1

Water Container Codes: P = Unpreserved Plastic; N = Nitric Preserved Plastic; ORC = Nitric Preserved ORC; SH = Sodium Hydroxide/Cd Preserved; S = Sodium Hydroxide/Preserved Plastic; AG = Amber Glass Unpreserved; AP - Airfreight Unpreserved Plastic; ORC = Nitric Preserved Plastic; F = Formaldehyde Preserved Glass; V = VOA Vial HCI Preserved; VB = VOA Vial Sodium Bisulphate Preserved; VB = VOA Vial Sodium Bisulphate Preserved Plastic; F = Formaldehyde Preserved Glass; Z = Zinc Acetate Preserved Bottle; E = EDTA Preserved Bottles; ST = Sterile Bottle; ASS = Plastic Bag for Acid Sulphate Soils; B = Unpreserved Bag.



#### **CERTIFICATE OF ANALYSIS**

Work Order : ES1908111

Client : CBASED ENVIRONMENTAL PTY LTD

Contact : All Deliverables

Address : Unit 3 2 Enterprise Cres

Singleton NSW 2330

Telephone : +61 02 6571 3334

Project : Hanson Calga Surface Water Monitoring

Order number : 4502544748

C-O-C number : ----

Sampler : BRAD SEAMAN

Site

Quote number : SYBQ/222/16 and PLANNED EVENTS

No. of samples received : 5
No. of samples analysed : 5

Page : 1 of 2

Laboratory : Environmental Division Sydney

Contact : Customer Services ES

Address : 277-289 Woodpark Road Smithfield NSW Australia 2164

Telephone : +61-2-8784 8555

Date Samples Received : 18-Mar-2019 11:45

Date Analysis Commenced : 18-Mar-2019

Issue Date : 22-Mar-2019 15:30



This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

#### Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories Position Accreditation Category

Ankit Joshi Inorganic Chemist Sydney Inorganics, Smithfield, NSW

Page : 2 of 2 Work Order : ES1908111

Client : CBASED ENVIRONMENTAL PTY LTD
Project : Hanson Calga Surface Water Monitoring



#### **General Comments**

The analytical procedures used by the Environmental Division have been developed from established internationally recognized procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are employed in the absence of documented standards or by client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key: CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

- ^ = This result is computed from individual analyte detections at or above the level of reporting
- ø = ALS is not NATA accredited for these tests.
- ~ = Indicates an estimated value.
- TDS by method EA-015 may bias high for various samples due to the presence of fine particulate matter, which may pass through the prescribed GF/C paper.

#### **Analytical Results**

Sub-Matrix: WATER (Matrix: WATER)		Cli	ent sample ID	Site A	Site B	Site C	Site D	Site F (Point 1) No discharge, Sample Only	
	Ci	lient sampli	ing date / time	18-Mar-2019 08:00	18-Mar-2019 08:00	18-Mar-2019 08:30	18-Mar-2019 08:00	18-Mar-2019 08:00	
Compound	CAS Number LOR L		Unit	ES1908111-001	ES1908111-002	ES1908111-003	ES1908111-004	ES1908111-005	
				Result	Result	Result	Result	Result	
EA005P: pH by PC Titrator									
pH Value		0.01	pH Unit	5.51	6.53	6.78	6.46	5.60	
EA010P: Conductivity by PC Titrator									
Electrical Conductivity @ 25°C		1	μS/cm	32	112	113	46	29	
EA015: Total Dissolved Solids dried at	180 ± 5 °C								
Total Dissolved Solids @180°C		10	mg/L	133	80	86	56	67	
EA025: Total Suspended Solids dried a	at 104 ± 2°C								
Suspended Solids (SS)		5	mg/L	45	115	13	<5	17	
EP020: Oil and Grease (O&G)									
Oil & Grease		5	mg/L	<5	<5	<5	<5	<5	