



CBased Environmental Pty Limited

ABN 62 611 924 264



Calga Quarry

Environmental Monitoring

**Dust Deposition, Surface Water,
Groundwater and Meteorological Data**

February 2021

Colin Davies BSc MEIA CEnvP
Environmental Scientist
Date: 19 March 2021

Executive Summary

CBased Environmental is contracted by Hanson Quarry Products to conduct environmental monitoring at the Calga Sand Quarry.

The monitoring includes:

- Dust deposition;
- Surface water; and
- A meteorological data.

This report was prepared by CBased Environmental and includes the following results for February 2021:

- Dust deposition;
- Surface water quality;
- Bi-monthly ground water quality; and
- Meteorological parameters.

The February 2021 dust deposition results for insoluble solids showed:

- Increased levels when compared to January 2021 with exception to CD3 which has decreased levels in comparison.
- No excessively contaminated dust gauges; and
- Rolling annual averages below the Air Quality Management Plan criteria of 3.7g/m².month.

Monthly surface water samples were collected at sites A, C1, C2, D and F. Samples were not collected from site B due to the site being dry at the time of sampling. The samples were collected and analysed for a monthly sampling event. Results show pH within the slightly acidic range, low electrical conductivity, low total dissolved solids and low total suspended solids. Oil and grease was not detected at sites A, C1, C2, D and F in February 2021.

The Calga Quarry weather station data recovery in February 2021 was approximately 93%. A summary of rainfall comparison is provided below.

Location	Rainfall (mm)
Calga Quarry	62.4mm
BOM Peats Ridge*	NA
BOM Gosford*	91.4mm
BOM Peats Ridge long-term mean for February*	154.3mm

Notes: NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website: www.bom.gov.au

BOM stations report rainfall at 9am

Calga Quarry station reports rainfall at midnight.

1.0 Sampling Programme

Hanson Calga Quarry conducts environmental monitoring in accordance to Development Consent, OEH (EPA) licence and Environmental Management Plans. CBased Environmental are contracted to undertake dust deposition gauge, surface water, groundwater and meteorological monitoring for the project. CBased Environmental commenced monitoring from the April 2006 monitoring period.

Dust deposition gauges are operated to the Australian Standard AS3580.10.1 *“Methods for sampling and analysis of ambient air method. Determination of particulates- deposited matter- gravimetric method”*. Sampling is undertaken every 30 +/- 2 days and each gauge is analysed for insoluble solids and ash residue. The results are reported as g/m².month.

Six (6) dust deposition gauges are monitored as follows:

- CD1 – installed 1 May 2006. Gauges air quality impacts to the east of site operations;
- CD2c – located on a rehabilitated section of land between the extraction area and adjacent resident. Gauges air quality impacts to the north of site operations. Replaces former gauges CD2a and CD2b;
- CD3 – installed prior to May 2006. Gauges air quality impacts to the south of site operations;
- CD4 – installed 3 October 2006. Gauges air quality impacts to the south of site operations;
- CD5 – installed 14 December 2006. Gauges air quality impacts to the south of site operations; and
- CD6 installed 14 December 2006. Gauges air quality impacts to the south of the operations.

Dust gauge CD2a was discontinued at the start of August 2006 due to quarry operations “mining out” the site of the gauge. The replacement gauge, CD2b, was located in a position adjacent to the boundary between B. Kashouli and F. & J. Gazzana in conformance with the Air Quality Management Plan. CD2b was discontinued at the end of January 2010 due to contamination of the gauge by non-quarry related vehicle movements on a track adjacent to the gauge. CD2b was replacement by dust gauge CD2c.

Surface water is sampled in accordance with Australian Standards:

- AS5667.1 *“Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples”*;
- AS5667.6 *“Water quality sampling—guidance on sampling of rivers and streams”*; and
- AS5667.4 *“Water quality sampling—guidance on sampling from lakes, natural and man-made”*.

Surface water monitoring sites include local streams and dams. Laboratory analysis includes pH, electrical conductivity, total suspended solids, total dissolved solids and total oil and grease. Monitoring is conducted monthly at Sites A and F (dams) and

when Sites B, C and D are flowing. Additional samples are collected when daily rainfall exceeds 50mm.

Groundwater is sampled in accordance with Australian Standards:

- AS5667.1 *“Guidance on the design of sample programs, sampling techniques and the preservation and handling of samples”*; and
- AS5667.11 *“Water quality sampling—guidance on sampling of ground waters”*.

Groundwater monitoring sites are sampled bi-monthly for depth and water quality. Groundwater monitoring loggers continuously record water levels in a selection of bores.

Meteorological monitoring is conducted at the quarry and displayed on the site computer with a real-time display. Metrological parameters are measured according to Australian Standard AS3580.14 *“Methods for sampling and analysis of ambient air. Meteorological monitoring for ambient air quality monitoring applications”*

The weather station has the following sensor configuration:

- Air temperature;
- Humidity;
- Rainfall;
- Atmospheric pressure;
- Evaporation;
- Solar radiation;
- Wind speed; and
- Wind direction.

CBased Environmental continued to operate the monitoring equipment and utilise site collections at their existing locations.

The locations of monitoring points are provided in **Figure 1**.

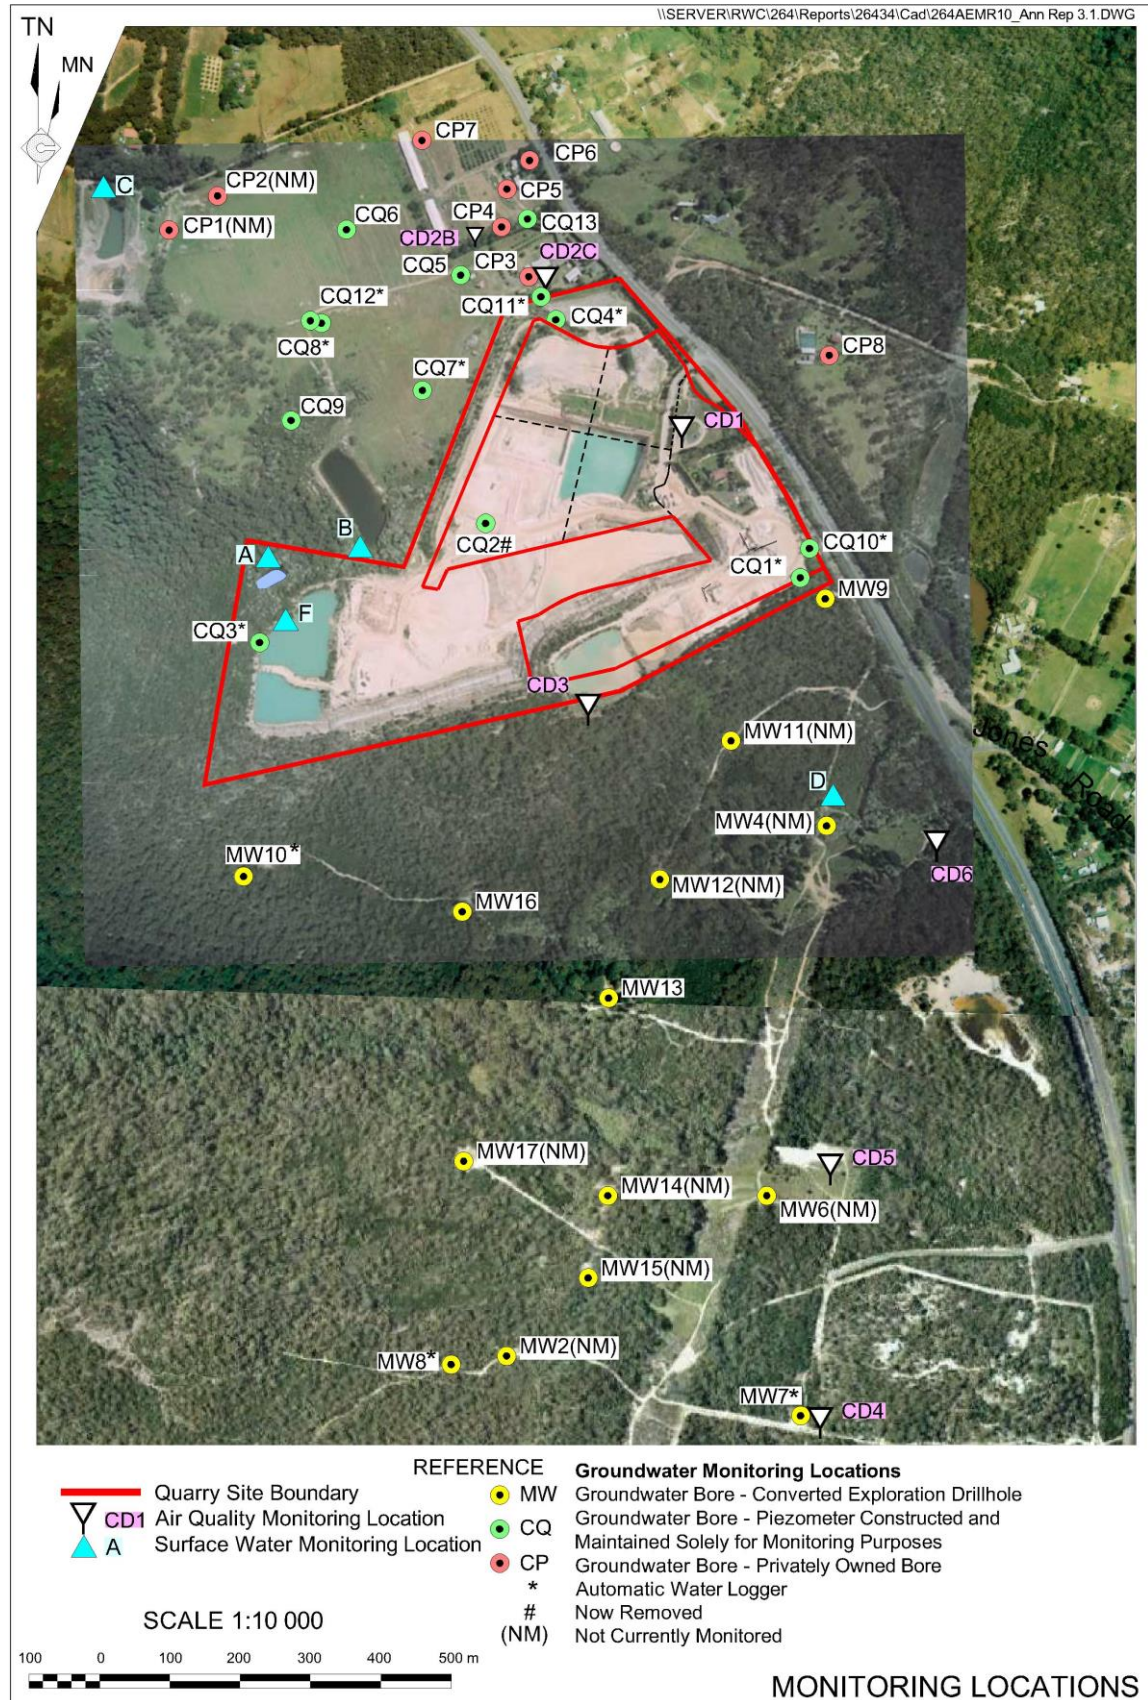


Figure 1: Hanson Calga Quarry Environmental Monitoring Locations

2.0 Results

2.1 Dust Deposition

The results for February 2021 and the project 12-month rolling average are provided **Table 1**.

Dust deposition charts for all dust gauge sites appear in **Figure 2** below. The field sheet, chain of custody documentation and laboratory analysis certificates are provided in **Appendix 1**.

Table 1: Dust Deposition Results: 3 February 2021 – 4 March 2021 (30 days)

Site	Monthly Insoluble Solids	Monthly Ash Residue	Monthly Combustible Matter	Monthly Ash Residue/ Insoluble Solids %	Rolling Annual Average Insoluble Solids
CD1	1.9	1.0	0.9	53	1.4
CD2c	1.4	0.5	0.9	36	0.9
CD3	1.1	0.5	0.6	45	1.2
CD4	0.6	0.2	0.4	33	0.7
CD5	1.7	1.4	0.3	82	0.8
CD6	0.8	0.4	0.4	50	0.7

Notes:

Units in g/m².month unless indicated

Insoluble solid results marked with an * indicate an excessively contaminated gauge. Contamination can include bird droppings, vegetation (such as plant matter, algae, pollen and seeds) and insects

Results in **bold** indicate insoluble solids levels above 3.7g/m².month; the Development Consent's annual average amenity criteria at residential locations

The current rolling annual average is calculated from March 2020 to February 2021

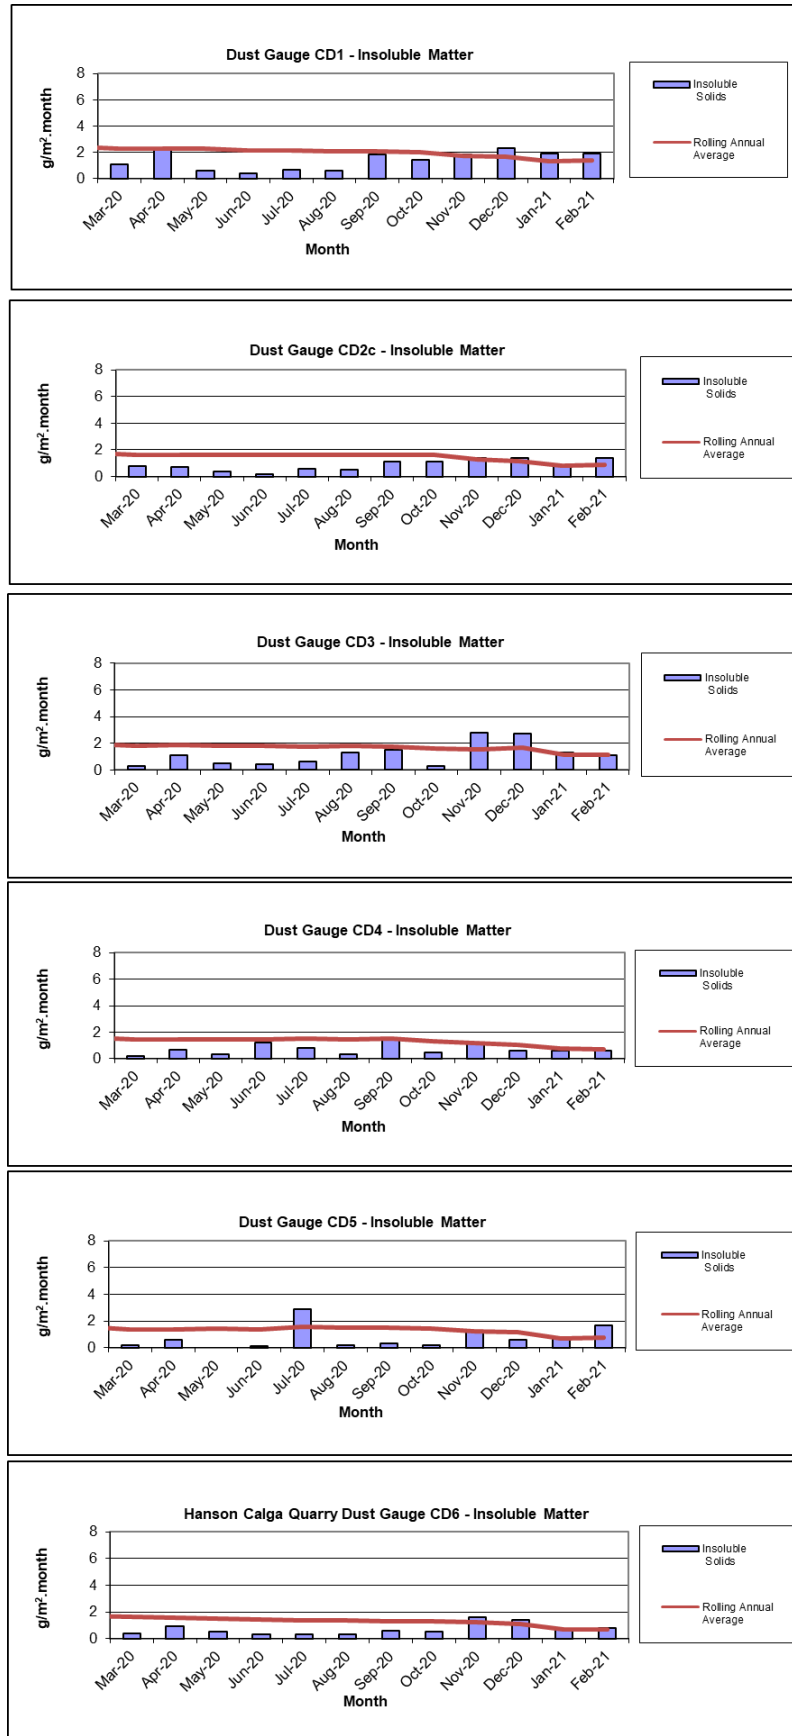


Figure 2: Summary Monthly/Annual Dust Deposition Results for Insoluble Solids

2.2 Surface Water (Monthly)

Monthly surface water monitoring was conducted on 3 February 2021 and results are provided in **Table 2**. The field sheet, chain of custody documentation and laboratory analysis certificates are provided in **Appendix 1**.

Samples were collected at sites A, C1, C2, D and F.

Table 2: Monthly Surface Water Monitoring Results – February 2021

Site	Observed Flow Rate* (visual)	Water Colour* (visual)	Turbidity* (visual)	pH	EC (µS/cm)	TDS (mg/L)	TSS (mg/L)	Oil and Grease (mg/L)
A	Dam	Clear	Clear	5.65	91	80	<5	<5
B	No flow							
C1	Dam	Clear	Clear	6.42	88	49	9	<5
C2	Steady	Clear	Clear	6.14	103	54	5	<5
D	Trickle	Clear	Clear	5.09	88	56	6	<5
F	Dam	Green	Slight	6.1	94	58	<5	<5

* Indicates field measurements. All other results are laboratory analysed

EC = Electrical conductivity

TDS = Total dissolved solids

TSS = Total suspended solids

2.2.1 Non-Routine Surface Water Sampling

No non-routine surface water sampling was completed in February 2021.

2.3 Groundwater (Bi-monthly)

Groundwater was sampled on 3 February 2021. Data is displayed in Table 3 and Figures 3 – 6. The field sheet, chain of custody documentation and laboratory analysis certificates are provided in Appendix 1.

Water quality tests for pH and electrical conductivity were conducted by CBased Environmental Pty Limited. For water quality purposes, water was purged from the bore until constant pH (+/- 0.1 pH units) and electrical conductivity (+/- 5%) was obtained between samples.

Table 3: Groundwater Quality Data

Site	Bore	Type	Depth to Water April 2006	Depth to Water (this report)	pH (this report)	Electrical Conductivity (this report)
CQ3	Voutos	* Monitor	10.53	10.95	6.64	89.6
CQ4	Voutos	* Monitor	8.78	10.98	5.63	114.5
CQ5	Gazzana	Dip only	8.69	6.29	4.06	211.1
CQ6	Gazzana	Dip only	16.00			
CQ7	Gazzana	* Monitor	6.89	5.96	5.59	214.2
CQ8	Gazzana	* Monitor	11.03	5.88	4.48	113.4
CQ9	Gazzana	Dip only	10.10			
CQ10	Voutos	* Monitor	NI	24.69	5.42	106.2
CQ11S	Gazzana	* Monitor	NI	11.21	5.65	141.4
CQ11D	Gazzana	* Monitor	NI	12.93	5.14	124.8
CQ12	Gazzana	* Monitor	NI	3.97	4.28	126.4
CQ13	Kashouli	* Monitor	NI	12.89	4.3	131.1
CP3	Gazzana	Domestic	10.40			
CP4	Kashouli	Domestic	13.63	2.43	4.61	182.5
CP5	Kashouli	Domestic	16.61	6.67	6.09	84.1
CP6	Kashouli	Domestic	16.27	6.01	4.36	117.8
CP7	Kashouli	Production	8.56	2.23	5.68	97.2
CP8	Rozmanec	Domestic	22.17	20.97	4.45	87.6
CP13	W P White	Domestic	NI	10.59	4.46	111
CP15	32 Polins Road, Calga	Domestic	NI	2.68	5.46	106.5
MW7	Rocla Bore	* Monitor	15.76	12.70	5.75	29.7
MW8	Rocla Bore	* Monitor	9.82	6.60	5.1	44.9
MW9	Rocla Bore	* Monitor	22.44	23.29	4.49	67.5
MW10	Rocla Bore	* Monitor	15.41	10.67	4.48	91.8
MW13	Rocla Bore	Dip only	NI	8.90	4.47	81.2
MW16	Rocla Bore	Dip only	NI	8.20	4.45	90.8
MW17	Rocla Bore	Dip only	NI	10.12	4.87	94.7

Notes:

Water level measured from top of bore case (TOC) to water

pH measured in pH units / electrical conductivity measured in $\mu\text{S}/\text{cm}$

Blank cells = no data available

* = Logger Installed

NI = Bores installed after April 2006. April 2006 was the first set of measurements taken by CBased Environmental Pty Limited

Yellow shading indicates increase to groundwater depth (water moved away from surface) since last sampling event

Green shading indicates decrease to groundwater depth (water moved towards surface) since last sampling event

Pink shading indicates stable groundwater depth (+/- 0.01m) since last sampling event

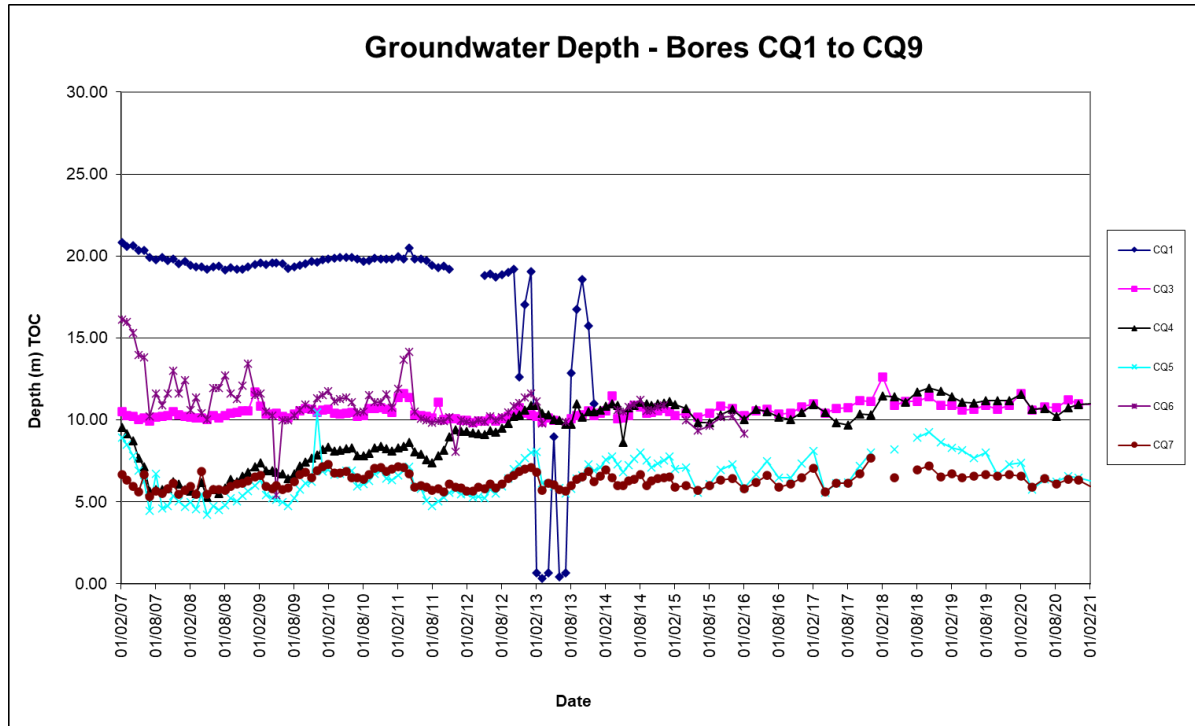


Figure 3: Groundwater Depth – Bores CQ1 to CQ9

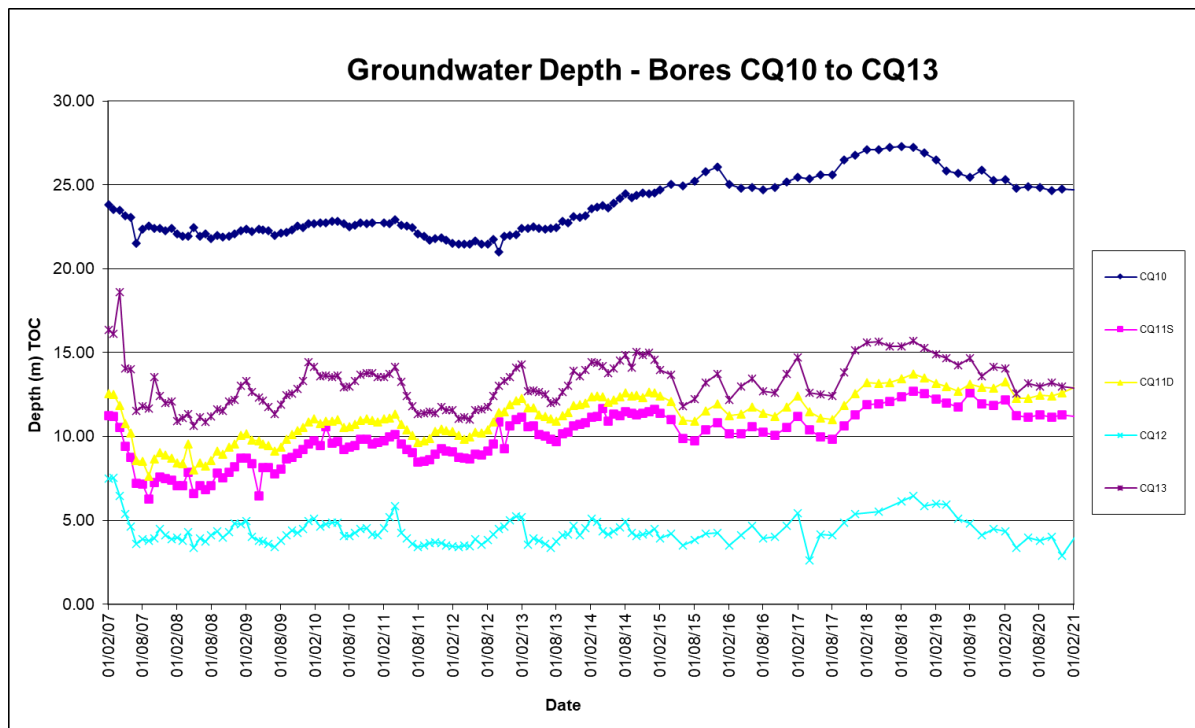


Figure 4: Groundwater Depth – Bores CQ10 to CQ13

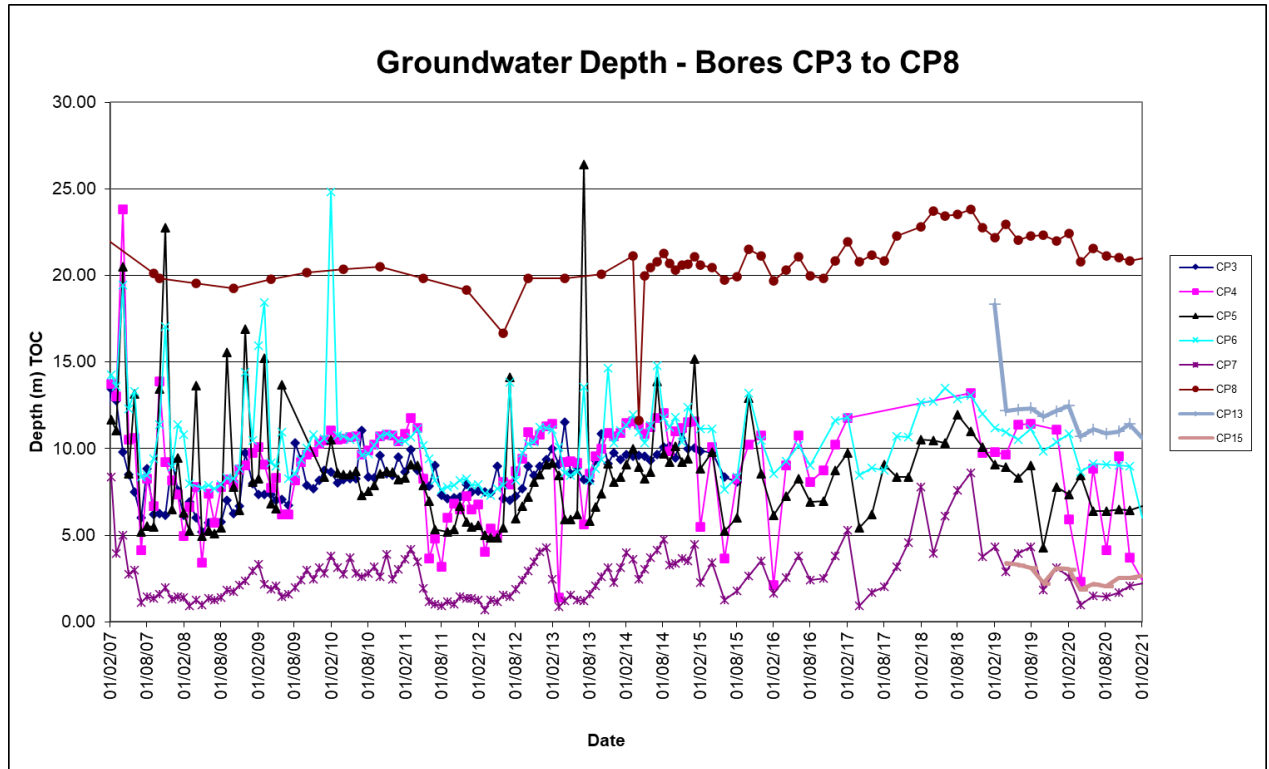


Figure 5: Groundwater Depth – Bores CP3 to CP8

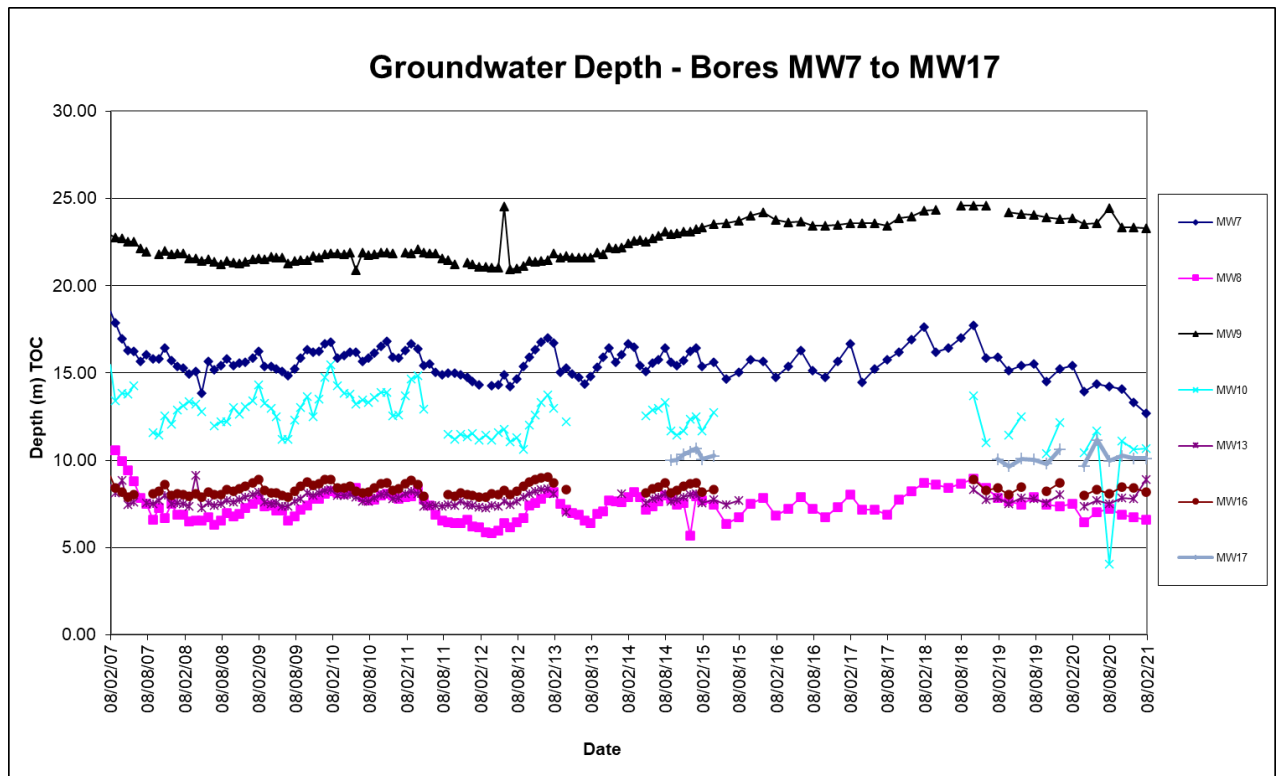


Figure 6: Groundwater Depth – Bores MW7 to MW17

2.3 Meteorological Data

The Calga Quarry weather station data recovery for February 2021 was approximately 93% due to insufficient data on 18 and 19 February 2021 due to power outages.

The weather station data follows and includes:

- Monthly rainfall comparison between quarry data and BOM data. Refer to **Table 4**;
- Monthly data summary. Refer to **Table 5**;
- Weather charts of air temperature, humidity, heat index and wind chill, atmospheric pressure, solar radiation, evapotranspiration, rain, wind speed and data reception. Refer to **Figures 7 – 10**; and
- Wind rose (frequency distribution diagram of wind speed and direction). Refer to **Figure 10**.

A summary of rainfall comparison is provided in **Table 4**.

Table 4: Comparison of Local Rainfall – February 2021

Location	Rainfall (mm)
Calga Quarry	62.4mm
BOM Peats Ridge*	NA
BOM Gosford*	91.4mm
BOM Peats Ridge long-term mean for January*	154.3mm

Notes: NA = Not Available

*Data sourced from Bureau of Meteorology (BOM) website: www.bom.gov.au

BOM stations report rainfall at 9am

Calga Quarry station reports rainfall at midnight.

An annual calibration was undertaken on the weather station during April 2020 and is next due in March 2021. Please refer to **Appendix 1**.

[illegible]

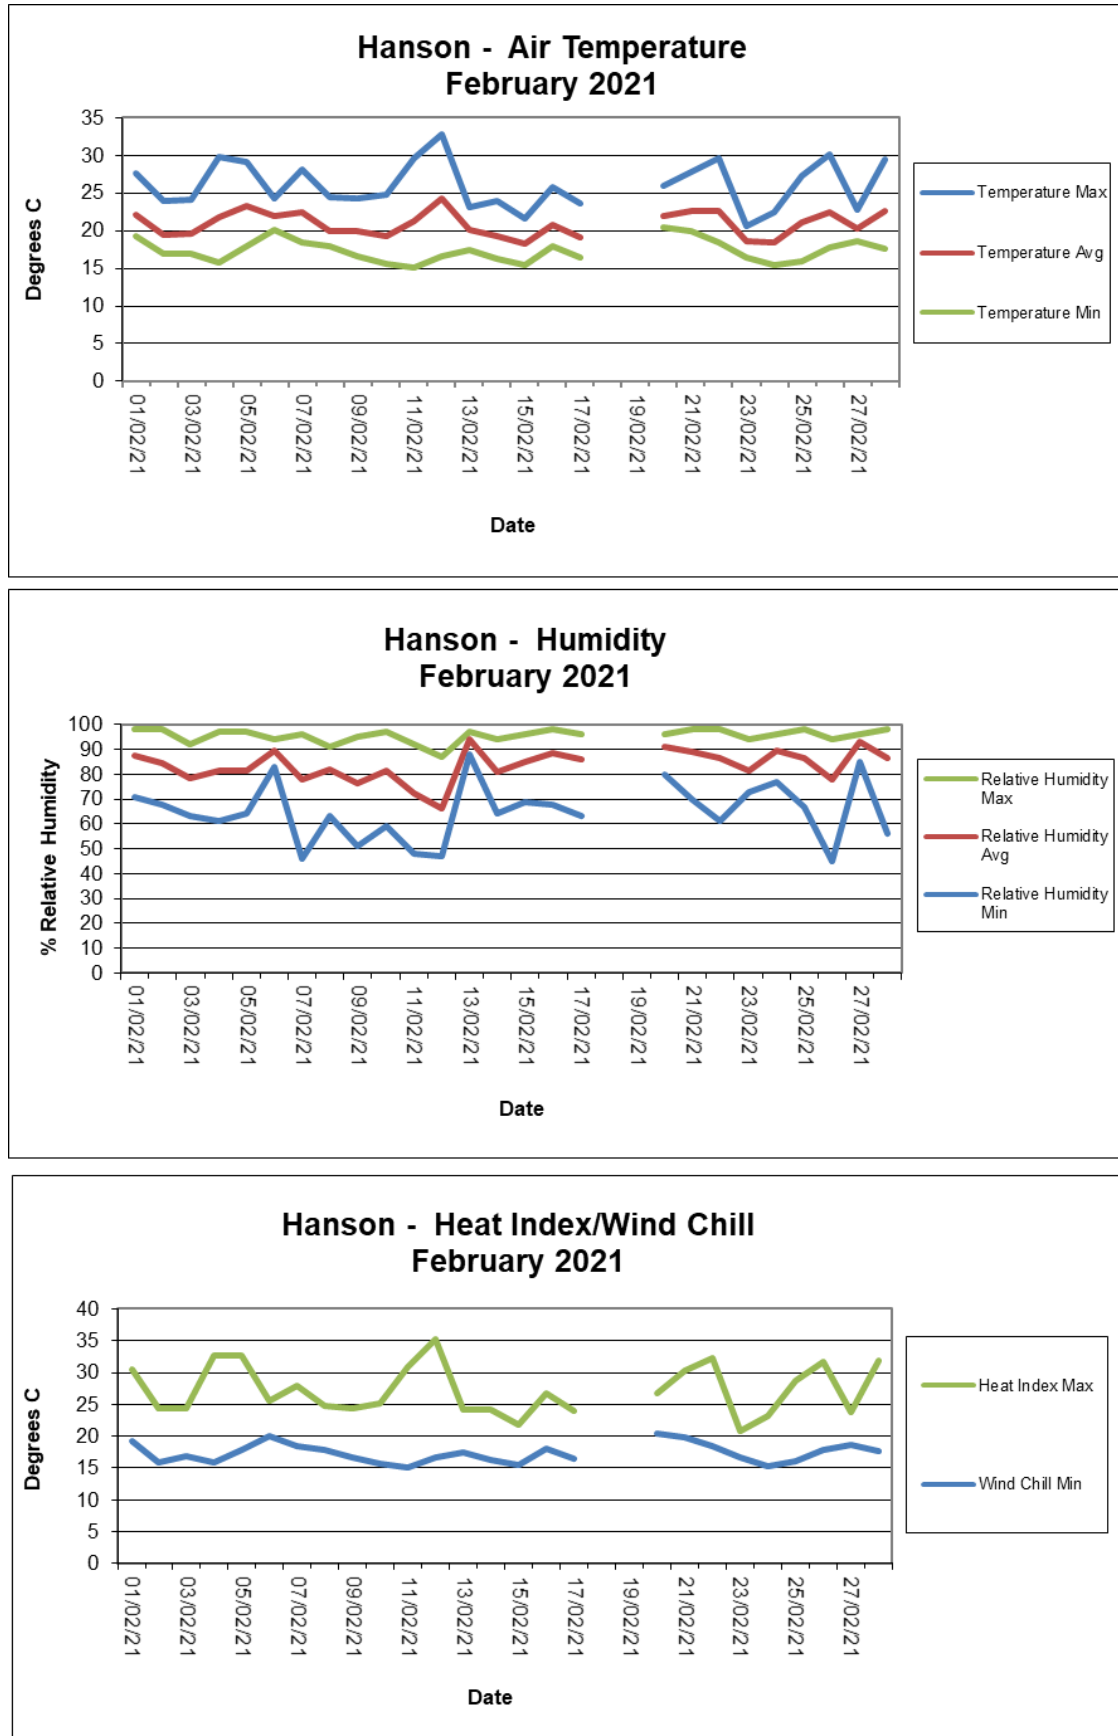


Figure 7 Summary of Monthly Temperature, Humidity and Heat Index Results

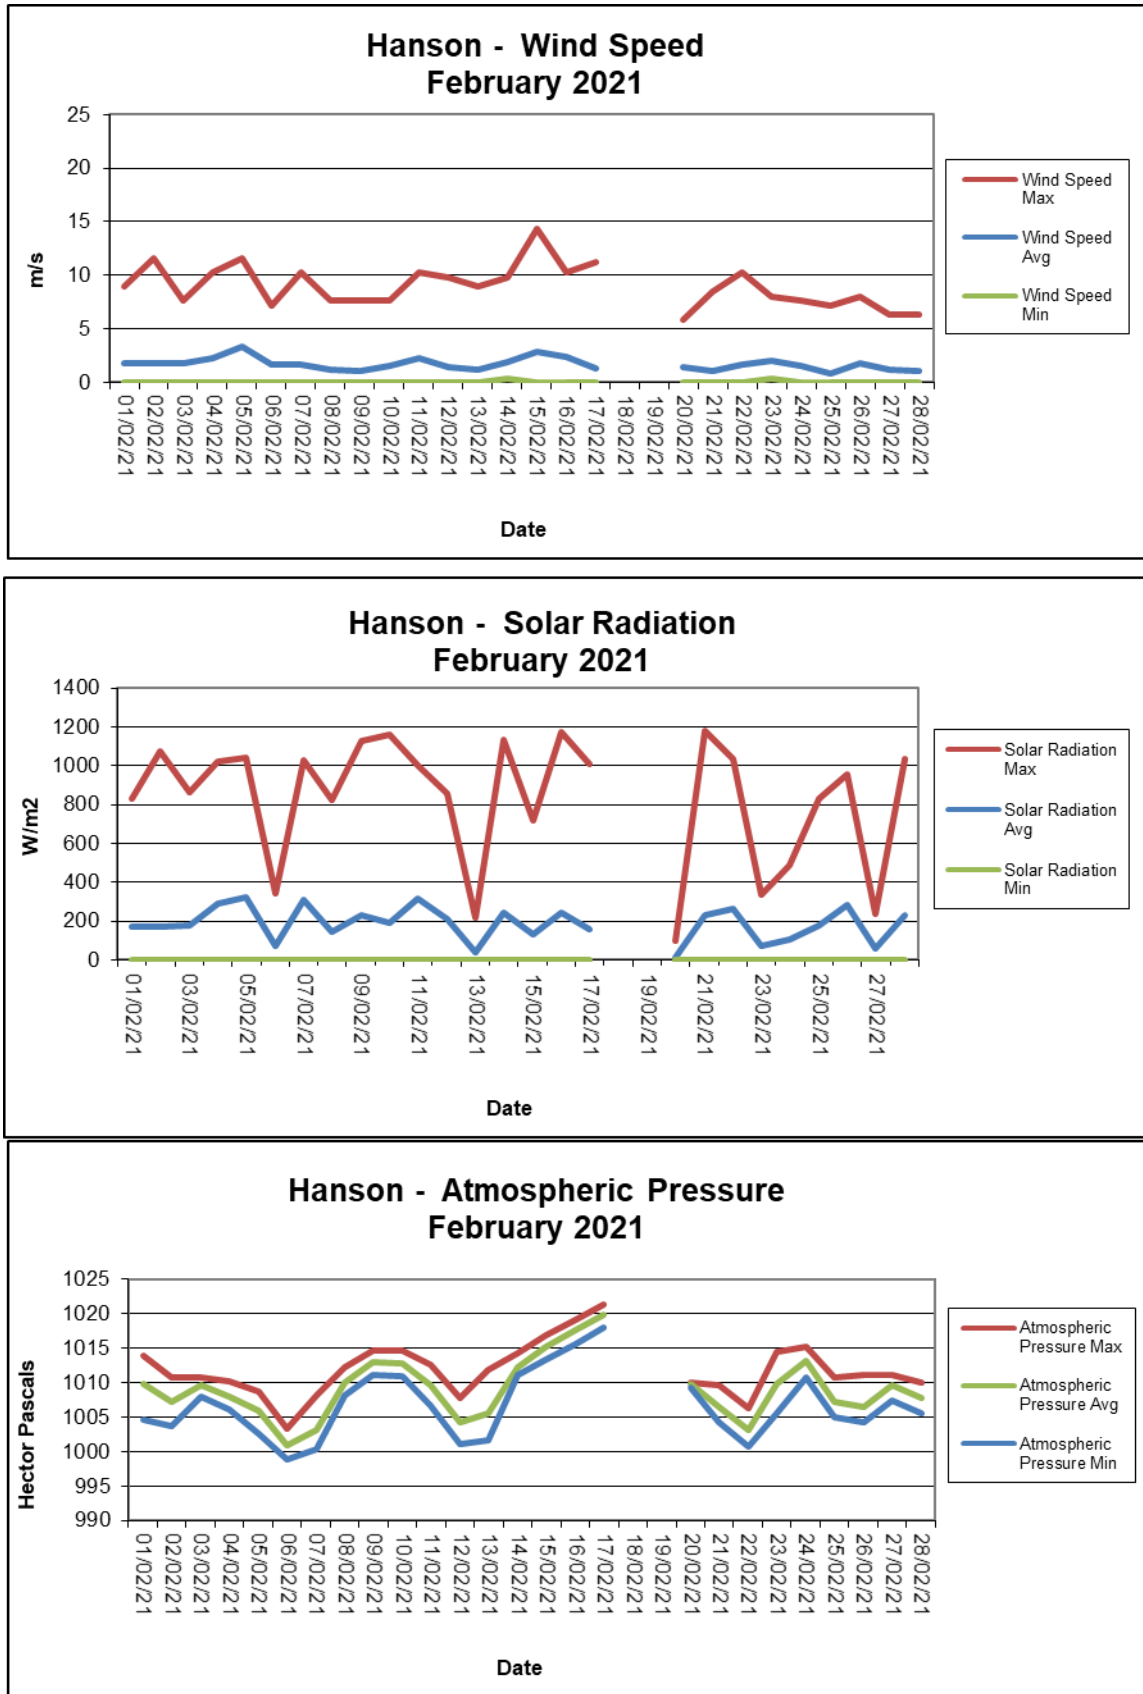


Figure 8 Summary of Monthly Wind Speed, Solar Radiation and Atmospheric Pressure Results

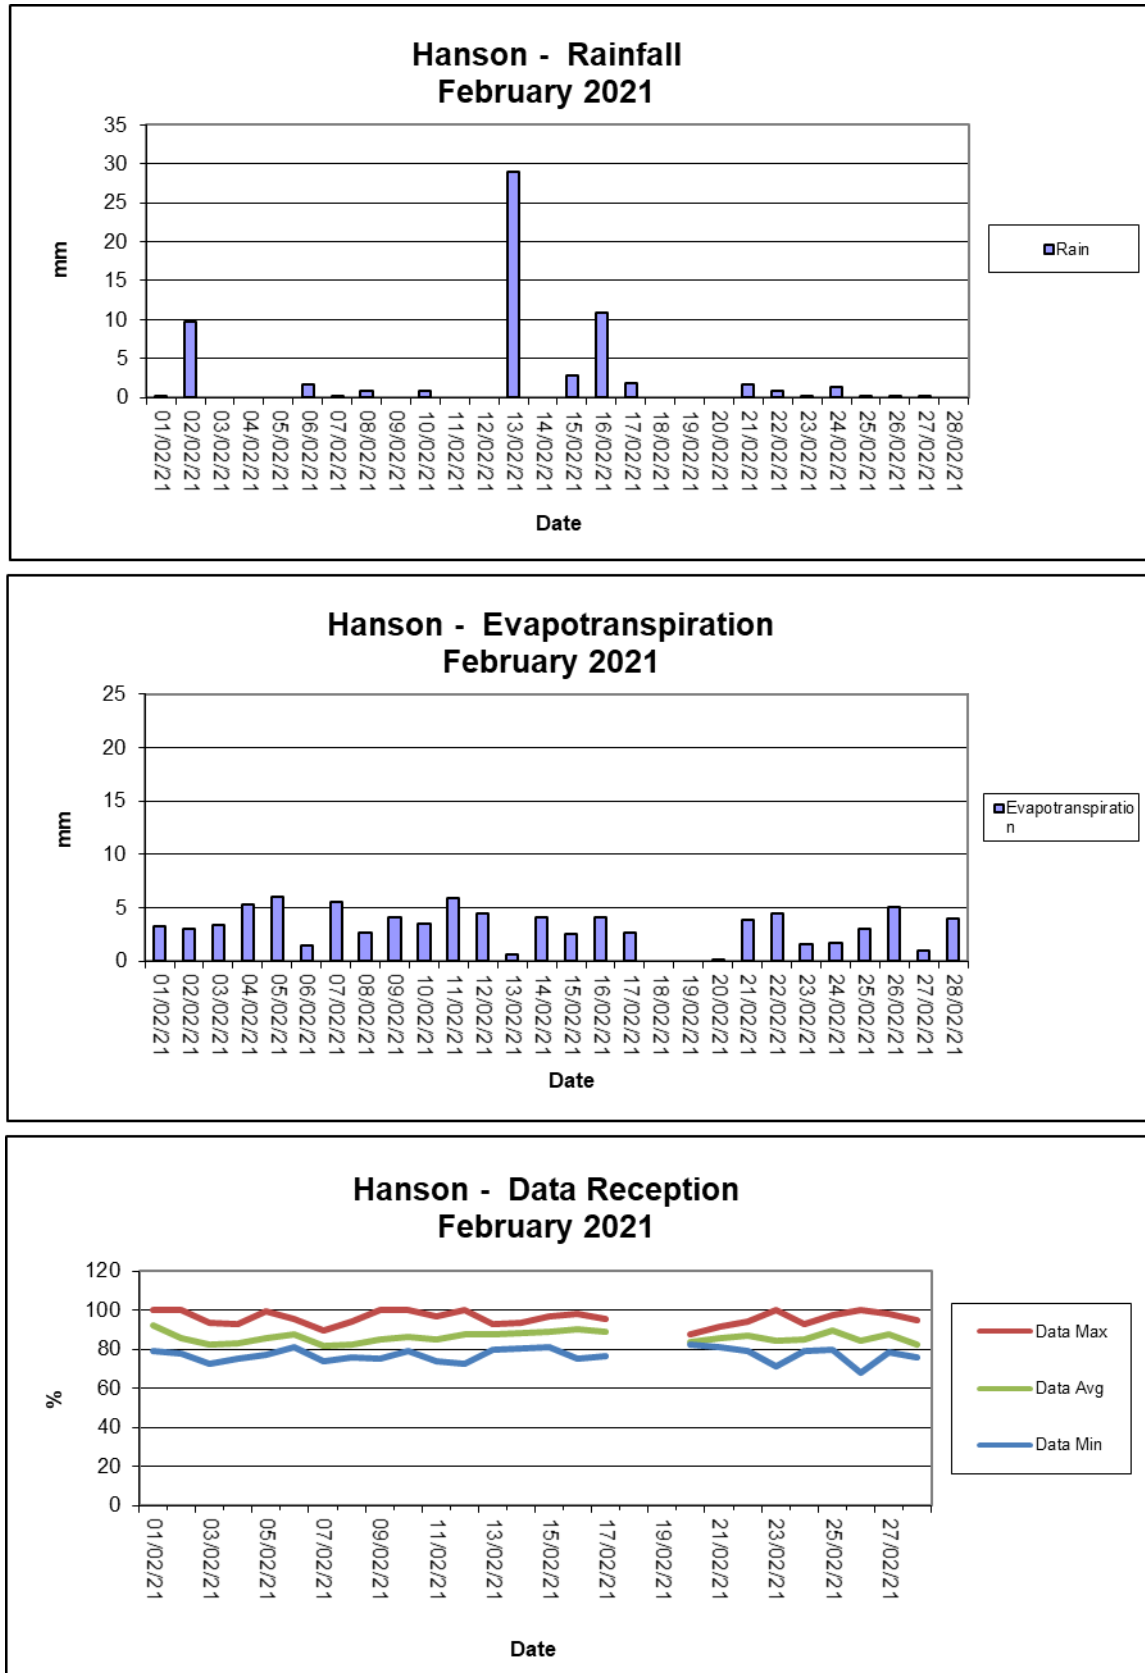


Figure 9 Summary of Monthly Rainfall, Evapotranspiration and Data Reception Results

Frequency plot of the average wind speed and average direction over each 15-minute sampling period. Wind is considered to be calm when at less than a 15-minute average of 1m/s.

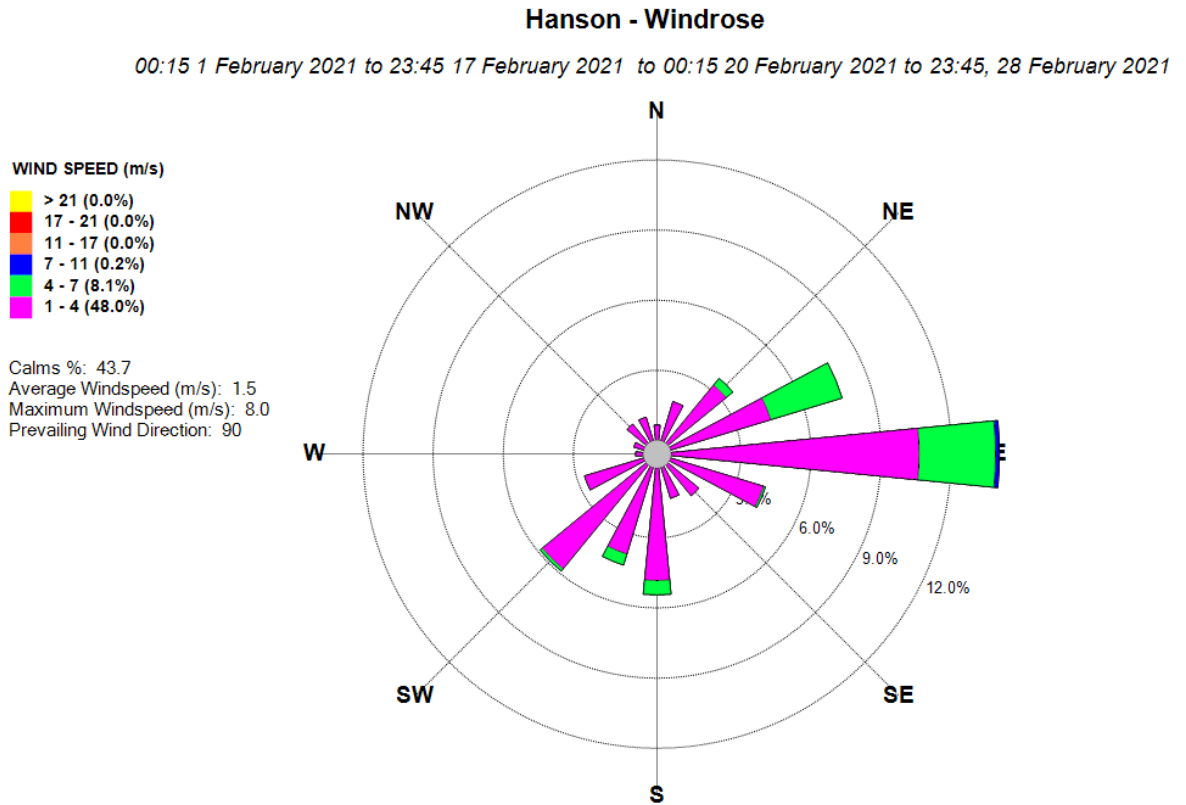


Figure 10: *Monthly Windrose Plot – February 2021*

The predominant wind for February was from the East with most frequent, strongest winds from the East. The maximum wind speed was 14.3 m/s from the South.

Appendix 1

Field Sheets

Chain of Custody Documentation

Laboratory Analysis Certificates



Date Installed: 4.3.21
Date Collected: 3.2.21

Sampled By: A. SMITH
L. KING

[illegible]

Report broken funnels and replacement diameters

Signed: 

[illegible]

Environmental Division
Newcastle
Work Order Reference
EN2101572



Telephone : + 61 2 4014 2500

AUSTRALIAN LABORATORY SERVICES P/L

CERTIFICATE OF ANALYSIS

Work Order : **EN2101572**
Client : **CBASED ENVIRONMENTAL PTY LTD**
Contact : All Deliverables
Address : Unit 3 2 Enterprise Cres
Singleton NSW 2330
Telephone : +61 02 6571 3334
Project : Hanson Calga Dusts
Order number : ----
C-O-C number : ----
Sampler : A Smith, Leesa King
Site :
Quote number : SYBQ/403/18 - COMPASS
No. of samples received : 6
No. of samples analysed : 6

Page : 1 of 4
Laboratory : Environmental Division Newcastle
Contact :
Address : 5/585 Maitland Road Mayfield West NSW Australia 2304
Telephone : +61 2 4014 2500
Date Samples Received : 04-Mar-2021 12:10
Date Analysis Commenced : 08-Mar-2021
Issue Date : 15-Mar-2021 17:04



Accreditation No. 825
Accredited for compliance with
ISO/IEC 17025 - Testing

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted, unless the sampling was conducted by ALS. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

Signatories	Position	Accreditation Category
Zoran Grozdanovski	Laboratory Operator	Newcastle - Inorganics, Mayfield West, NSW



General Comments

The analytical procedures used by ALS have been developed from established internationally recognised procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are fully validated and are often at the client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.

LOR = Limit of reporting

^ = This result is computed from individual analyte detections at or above the level of reporting

Ø = ALS is not NATA accredited for these tests.

~ = Indicates an estimated value.

- Analysis as per AS3580.10.1-2016. Samples passed through a 1mm sieve prior to analysis. NATA accreditation does not apply for results reported in g/m².mth as sampling data was provided by the client.



Analytical Results

Sub-Matrix: DEPOSITIONAL DUST
 (Matrix: AIR)

Sample ID

				CD1 03/02/21 - 04/03/21	CD2c 03/02/21 - 04/03/21	CD3 03/02/21 - 04/03/21	CD4 03/02/21 - 04/03/21	CD5 03/02/21 - 04/03/21
Sampling date / time				04-Mar-2021 00:00	04-Mar-2021 00:00	04-Mar-2021 00:00	04-Mar-2021 00:00	04-Mar-2021 00:00
Compound	CAS Number	LOR	Unit	EN2101572-001	EN2101572-002	EN2101572-003	EN2101572-004	EN2101572-005
				Result	Result	Result	Result	Result
EA120: Ash Content								
Ash Content	----	0.1	g/m ² .month	1.0	0.5	0.5	0.2	1.4
Ash Content (mg)	----	1	mg	17	9	9	4	24
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m ² .month	0.9	0.9	0.6	0.4	0.3
Combustible Matter (mg)	----	1	mg	16	15	10	6	5
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m ² .month	1.9	1.4	1.1	0.6	1.7
Total Insoluble Matter (mg)	----	1	mg	33	24	19	10	29



Analytical Results

Sub-Matrix: **DEPOSITIONAL DUST**
 (Matrix: **AIR**)

Sample ID

				CD6	----	----	----	----
				03/02/21 - 04/03/21	----	----	----	----
				04-Mar-2021 00:00	----	----	----	----
<i>Compound</i>	<i>CAS Number</i>	<i>LOR</i>	<i>Unit</i>	EN2101572-006	-----	-----	-----	-----
				Result	----	----	----	----
EA120: Ash Content								
Ash Content	----	0.1	g/m ² .month	0.4	----	----	----	----
Ash Content (mg)	----	1	mg	7	----	----	----	----
EA125: Combustible Matter								
Combustible Matter	----	0.1	g/m ² .month	0.4	----	----	----	----
Combustible Matter (mg)	----	1	mg	6	----	----	----	----
EA141: Total Insoluble Matter								
Total Insoluble Matter	----	0.1	g/m ² .month	0.8	----	----	----	----
Total Insoluble Matter (mg)	----	1	mg	13	----	----	----	----



CBASED ENVIRONMENTAL PTY LIMITED

Date: 3-2-21

Client :
Project :

Hanson Calga

SURFACE WATERS

Site	Flow Rate	Odour	Sampling Time	Bottles	Water Turbidity	Water Colour	Comments
A	Dam	NO	10:45	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
B	No Flow	NO		1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
C1	Dam	NO	1:40	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
C2	Steady	NO	1:35	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
D	Trickle	NO	4:10	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	
F	Dam	NO	10:30	1x 250ml GP, 1x 500mL GP, 1x PG	CST	CLOOBG	

Turbidity: C=Clear, S= Slight, T=Turbid (CIRCLE)

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

Signed:

Sampled by: Leesa + Maddie

CHAIN OF CUSTODY DOCUMENTATION

CLIENT: CBased Environmental Pty Ltd				LABORATORY BATCH NO.:				Australian Laboratory Services Pty Ltd							
POSTAL ADDRESS: PO Box 245 CESSNOCK NSW 2325				SAMPLERS: CBased Environmental Pty Ltd <i>Leesa + Maddie</i>											
SEND REPORT TO: monitoringresults@cbased.com.au		SEND INVOICE TO: renae.mikka@cbased.com.au; accounts@cbased.com.au		PHONE: 0265713334		E-MAIL: monitoringresults@cbased.com.au									
DATA NEEDED BY: 5 working days		REPORT NEEDED BY: 5 working days		REPORT FORMAT: HARD: Yes FAX: DISK: BULLETIN BOARD: E-MAIL: Yes											
PROJECT ID: Hanson Quarry SW		QUOTE NO.: SYBQ-403-18		QC LEVEL: QCS1: QCS2: QCS3: Yes QCS4:											
P.O. NO.:		COMMENTS/SPECIAL HANDLING/STORAGE OR DIPOSAL:		ANALYSIS REQUIRED											
FOR LAB USE ONLY				pH		EC		TSS		TDS		O + G			
COOLER SEAL															
Yes No Total unless specified															
Broken Intact Cooler TEMP: deg.C															
SAMPLE DATA				CONTAINER DATA											
SAMPLE ID	MATRIX	DATE	TIME	TYPE & PRESERVATIVE	NO.										
A	Water	3-2-21	10-45	1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
B	Water			1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
C1	Water		1-40	1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
C2	Water		1-35	1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
D	Water		4-10	1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
F	Water		10-30	1x 250mlGP, 1x 500mLGP, 1xPG		X	X	X	X	X					
TOTAL BOTTLES:															
RELINQUISHED BY: <i>Leesa King</i>				RECEIVED BY: <i>MM 04/02/21 3:13pm</i>				METHOD OF SHIPMENT							
NAME: <i>Leesa King</i>		DATE: <i>4-2-21</i>		NAME: <i>MM</i>		DATE: <i>04/02/21 3:13pm</i>		CONSIGNMENT NOTE NO.							
OF: CBased Environmental		TIME: <i>3-10</i>		OF:		TIME:		TRANSPORT CO. NAME.							
NAME:		DATE:		NAME:		DATE:									
OF:		TIME:		OF:		TIME:									

*Container Type and Preservative Codes: P = Neutral Plastic; N = Nitric Acid Preserved; C = Sodium Hydroxide Preserved; J = Solvent Washed Acid Rinsed Jar; S = Solvent Washed Acid Rinsed Glass Bottle; VC = Hydrochloric Acid Preserved Vial; VS = Sulfuric Acid Preserved Vial; BS = Sulfuric Acid Preserved Glass Bottle; Z = Zinc Acetate Preserved Bottle; E = EDTA Preserved Bottles; ST = Sterile Bottle; O = Other.

AUSTRALIAN LABORATORY SERVICES P/L

CERTIFICATE OF ANALYSIS

Work Order : **ES2103780**
Client : **CBASED ENVIRONMENTAL PTY LTD**
Contact : All Deliverables
Address : Unit 3 2 Enterprise Cres
Singleton NSW 2330
Telephone : +61 02 6571 3334
Project : Hanson Quarry SW
Order number : ----
C-O-C number : ----
Sampler : Leesa King, Maddie Brown
Site :
Quote number : SYBQ/403/18 - COMPASS
No. of samples received : 5
No. of samples analysed : 5

Page : 1 of 2
Laboratory : Environmental Division Sydney
Contact : Customer Services ES
Address : 277-289 Woodpark Road Smithfield NSW Australia 2164
Telephone : +61-2-8784 8555
Date Samples Received : 04-Feb-2021 15:15
Date Analysis Commenced : 04-Feb-2021
Issue Date : 10-Feb-2021 15:21



Accreditation No. 825
Accredited for compliance with
ISO/IEC 17025 - Testing

This report supersedes any previous report(s) with this reference. Results apply to the sample(s) as submitted, unless the sampling was conducted by ALS. This document shall not be reproduced, except in full.

This Certificate of Analysis contains the following information:

- General Comments
- Analytical Results

Additional information pertinent to this report will be found in the following separate attachments: Quality Control Report, QA/QC Compliance Assessment to assist with Quality Review and Sample Receipt Notification.

Signatories

This document has been electronically signed by the authorized signatories below. Electronic signing is carried out in compliance with procedures specified in 21 CFR Part 11.

<i>Signatories</i>	<i>Position</i>	<i>Accreditation Category</i>
Ankit Joshi	Inorganic Chemist	Sydney Inorganics, Smithfield, NSW
Gregory Towers	Technical Officer	Chemistry, Newcastle West, NSW
Neil Martin	Team Leader - Chemistry	Chemistry, Newcastle West, NSW



General Comments

The analytical procedures used by ALS have been developed from established internationally recognised procedures such as those published by the USEPA, APHA, AS and NEPM. In house developed procedures are fully validated and are often at the client request.

Where moisture determination has been performed, results are reported on a dry weight basis.

Where a reported less than (<) result is higher than the LOR, this may be due to primary sample extract/digestate dilution and/or insufficient sample for analysis.

Where the LOR of a reported result differs from standard LOR, this may be due to high moisture content, insufficient sample (reduced weight employed) or matrix interference.

When sampling time information is not provided by the client, sampling dates are shown without a time component. In these instances, the time component has been assumed by the laboratory for processing purposes.

Where a result is required to meet compliance limits the associated uncertainty must be considered. Refer to the ALS Contact for details.

Key : CAS Number = CAS registry number from database maintained by Chemical Abstracts Services. The Chemical Abstracts Service is a division of the American Chemical Society.
 LOR = Limit of reporting
 ^ = This result is computed from individual analyte detections at or above the level of reporting
 Ø = ALS is not NATA accredited for these tests.
 ~ = Indicates an estimated value.

- TDS by method EA-015 may bias high for various samples due to the presence of fine particulate matter, which may pass through the prescribed GF/C paper.

Analytical Results

Sub-Matrix: **WATER**
 (Matrix: **WATER**)

Sample ID				A	C1	C2	D	F
Sampling date / time				03-Feb-2021 10:45	03-Feb-2021 13:40	03-Feb-2021 13:35	03-Feb-2021 16:10	03-Feb-2021 10:30
Compound	CAS Number	LOR	Unit	ES2103780-001	ES2103780-002	ES2103780-003	ES2103780-004	ES2103780-005
				Result	Result	Result	Result	Result
EA005: pH								
pH Value	----	0.01	pH Unit	5.65	5.63	6.44	6.60	5.03
EA010P: Conductivity by PC Titrator								
Electrical Conductivity @ 25°C	----	1	µS/cm	91	94	98	95	87
EA015: Total Dissolved Solids dried at 180 ± 5 °C								
Total Dissolved Solids @180°C	----	10	mg/L	80	69	64	73	56
EA025: Total Suspended Solids dried at 104 ± 2°C								
Suspended Solids (SS)	----	5	mg/L	<5	5	16	<5	20
EP020: Oil and Grease (O&G)								
Oil & Grease	----	5	mg/L	<5	<5	<5	<5	<5

Inter-Laboratory Testing

Analysis conducted by ALS Newcastle - Water, NATA accreditation no. 825.

(WATER) EA005: pH

(WATER) EA025: Total Suspended Solids dried at 104 ± 2°C



Date: 3.2.21

Client :
Project :Hanson Calga
Bi-Monthly Bores

GROUNDWATERS

Site	Time	DEPTH	Typical Depth (m)	Odour	Water Turbidity	Water Colour	1		2		Downloaded Logger? (Y/N)*	Comments
							pH	EC	pH	EC		
CQ3	10.30	10.95	10.74	NO	OST	LO O B G	6.06	92.3us	6.64	89.6us	yes	
CQ4	11.50	10.98	11.19	NO	OST	LO O B G	5.64	114.1us	5.63	114.5us	yes	
CQ5	12.10	6.29	8.04	NO	OST	LO O B G	4.09	214.4us	4.06	211.1us		
CQ7	12.05	5.96	6.61	yes	OST	LO O B G	6.02	202.1us	5.59	214.2us	yes	Fishy! hair in water.
CQ8	12.20	5.88	6.93	yes	OST	LO O B G	4.54	110.3us	4.48	113.4us	NO	Fishy Smell with ants.
CQ10	11.15	24.69	25.86	H2S	OST	LO O B G	5.45	105.8us	5.42	106.2us	yes	
CQ11S	11.35	11.21	12.1	H2S	OST	LO O B G	5.64	130.1us	5.65	141.4us	yes	
CQ11D	11.25	12.93	12.98	H2S	OST	LO O B G	5.13	125.8us	5.14	124.8us	yes	
CQ12	11.30	3.97	5.46	NO	OST	LO O B G	4.30	117.4us	4.28	126.4us	yes	
CQ13	12.45	12.89	14.42	NO	OST	LO O B G	4.27	130.1us	4.30	131.1us	yes	
CP4	12.55	2.43	10.56	NO	OST	LO O B G	4.63	180.6us	4.61	182.5us		
CP5	1.05	6.67	7.95	NO	OST	LO O B G	6.05	83.2us	6.09	84.1us		
CP6	1.00	6.01	10.73	NO	OST	LO O B G	4.39	119.8us	4.36	117.8us		
CP7	1.15	2.23	3.47	NO	OST	LO O B G	5.72	97.5us	5.68	97.2us		
CP8	4.25	20.97	22.36	NO	OST	LO O B G	4.43	88.2us	4.45	87.6us		
CP13**	4.40	10.59	13.4	NO	OST	LO O B G	4.49	114.1us	4.46	111.0us		
CP15	01.25	2.68	3.01	NO	OST	LO O B G	5.45	106.4us	5.46	106.5us		
MW7	3.30	12.70	15.3	NO	OST	LO O B G	5.72	28.0us	5.75	29.7us	NO	
MW8	3.40	6.60	7.66	NO	OST	LO O B G	5.14	45.9us	5.10	44.9us	yes	
MW9	11.00	23.29	24.09	NO	OST	LO O B G	4.50	67.8us	4.49	67.5us	yes	
MW10	2.45	10.67	11.44	NO	OST	LO O B G	4.50	90.7us	4.48	91.8us	yes	
MW13	3.15	8.90	7.71	NO	OST	LO O B G	4.48	81.4us	4.47	81.2us		
MW16	3.00	8.20	8.29	NO	OST	LO O B G	4.44	89.7us	4.45	90.8us		
MW17	3.50	10.12	9.93	NO	OST	LO O B G	4.86	93.1us	4.87	94.7us		

Turbidity: C=Clear, S=Slight, T=Turbid (CIRCLE)

pH/EC meter #: V1196

Laptop ID #: 874K 007

Signed: [Signature]

Colour: C=Clear, LO=Light Orange, O=Orange, B=Brown, G=Green (CIRCLE)

Sampled by: Leesa + Maddie

*If unable to download logger please provide comment/ explanation above

**Contact Wynston 15 min prior to access on: 0414 900 555

• Needs clearing.

* CQ8 logger has been removed faulty
* MW7 " " "